

MOTORCYCLE ACCIDENT CAUSE FACTORS AND IDENTIFICATION OF COUNTERMEASURES VOLUME I: TECHNICAL REPORT

H.H. Hurt, Jr.
J.V. Ouellet
D.R. Thom

Traffic Safety Center
University of Southern California
Los Angeles, California 90007

Contract No. DOT HS-5-01160
Contract Amount **\$501,814.00**



JANUARY 1981
FINAL REPORT

This document is available to the US. public through the
National Technical Information Service,
Springfield, Virginia 22161

Prepared For
U.S. DEPARTMENT OF TRANSPORTATION
National Highway Traffic Safety Administration
Washington, D.C. 20590

This document was prepared under the sponsorship of the National Center for Statistics and Analysis, National Highway Traffic Safety Administration, Department of Transportation, in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof. The findings and conclusions in this report are those of the author and not necessarily those of the National Highway Traffic Safety Administration.

| | | | | | |
|---|--|--|---|--|--|
| 1. Report No. | | 2. Government Accession No. | | 3. Recipient's Catalog No. | |
| 4. Title and Subtitle Final Report Motorcycle Accident Cause Factors and Identification of Countermeasures | | | | 5. Report Date January, 1981 | |
| | | | | 6. Performing Organization Code | |
| 7. Author(s) HURT, H.H., Jr., OUELLET, J.V., and THOM, D.R. | | | | 8. Performing Organization Report NO. USC Traffic Safety Center 81-1 | |
| 9. Performing Organization Name and Address University of Southern California Traffic Safety Center Motorcycle Accident Research University Park, Los Angeles, CA. 90007 | | | | 10. Work Unit No. (TRAIS) | |
| | | | | 11. Contract or Grant NO. DOT-HS-5-01160 | |
| | | | | 13. Type of Report and Period Covered FINAL REPORT | |
| 12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Washington, D.C. 20590 | | | | 14. Sponsoring Agency Code | |
| 15. Supplementary Notes Contract Technical Manager - Nicholas G. Tsongos, NCSA (202) 426-9124 | | | | | |
| 16. Abstract This report presents the data and findings from the on-scene, in-depth investigations of 900 motorcycle accidents and the analysis of 3600 traffic accident reports of motorcycle accidents in the same study area. Comprehensive data were collected and synthesized for these accidents to cover all details of environmental, vehicle and human factors. In addition, exposure data were collected and analyzed at 505 accident sites at the same time-of-day, same day-of-week, with same environmental conditions. These exposure data define the population at risk so that comparison with accident data will reveal the factors which are over- represented in the accident population. The analysis and review of these data identify cause factors of motorcycle accidents, relates the effectiveness of safety equipment and protective devices, and identifies countermeasures for accident and injury prevention. Volume I is the Technical Report containing the most significant data, data analysis, findings, conclusions and recommended countermeasures. Volume II is the Appendix with terminology, field data forms, and supplemental data and analysis. | | | | | |
| 17. Key Words Motorcycles, Motorcycle Accidents, Motorcycle Injuries, Safety Helmets. | | | 18. Distribution Statement Unlimited Available through the National Technical Information Service Springfield, VA 22161 | | |
| 19. Security Classif. (of this report) UNCLASSIFIED | | 20. Security Classif. (of this page) UNCLASSIFIED | | 21. No. of Pages Vol 1: 425 Vol 2: 404 | |
| | | | | 22. Price | |



METRIC CONVERSION FACTORS

Approximate Conversions to Metric Measures

| Symbol | When You Know | Multiply by | To Find | Symbol |
|----------------------------|---------------------------|----------------------------------|------------------------|-----------------|
| LENGTH | | | | |
| in | inches | 2.5 | centimeters | cm |
| ft | feet | 30 | centimeters | cm |
| yd | yards | 0.9 | meters | m |
| mi | miles | 1.6 | kilometers | km |
| AREA | | | | |
| m ² | square inches | 6.5 | square centimeters | cm ² |
| ft ² | square feet | 0.09 | square meters | m ² |
| yd ² | square yards | 0.8 | square meters | m ² |
| mi ² | square miles | 2.6 | square kilometers | km ² |
| | acres | 0.4 | hectares | ha |
| MASS (weight) | | | | |
| oz | ounces | 28 | grams | g |
| lb | pounds | 0.45 | kilograms | kg |
| | short tons (2000 lb) | 0.9 | tonnes | t |
| VOLUME | | | | |
| 1/2 sp | teaspoons | 5 | milliliters | ml |
| 1/4 sp | tablespoons | 15 | milliliters | ml |
| fl oz | fluid ounces | 30 | milliliters | ml |
| c | cups | 0.24 | liters | l |
| pt | pints | 0.47 | liters | l |
| qt | quarts | 0.95 | liters | l |
| gal | gallons | 3.8 | liters | l |
| ft ³ | cubic feet | 0.03 | cubic meters | m ³ |
| yd ³ | cubic yards | 0.76 | cubic meters | m ³ |
| TEMPERATURE (exact) | | | | |
| °F | Fahrenheit temperature | 5/9 (after subtracting 32) | Celsius temperature | °C |

Approximate Conversions from Metric Measures

| Symbol | When You Know | Multiply by | To Find | Symbol |
|----------------------------|-----------------------------------|----------------------|---------------------------|-----------------|
| LENGTH | | | | |
| mm | millimeters | 0.04 | inches | in |
| cm | centimeters | 0.4 | inches | in |
| m | meters | 3.3 | feet | ft |
| m | meters | 1.1 | yards | yd |
| km | kilometers | 0.6 | miles | mi |
| AREA | | | | |
| cm ² | square centimeters | 0.16 | square inches | in ² |
| m ² | square meters | 1.2 | square yards | yd ² |
| km ² | square kilometers | 0.4 | square miles | mi ² |
| ha | hectares (10,000 m ²) | 2.5 | acres | |
| MASS (weight) | | | | |
| g | grams | 0.035 | ounces | oz |
| kg | kilograms | 2.2 | pounds | lb |
| t | tonnes (1000 kg) | 1.1 | short tons | |
| VOLUME | | | | |
| ml | milliliters | 0.03 | fluid ounces | fl oz |
| l | liters | 2.1 | pints | pt |
| l | liters | 1.06 | quarts | qt |
| l | liters | 0.26 | gallons | gal |
| m ³ | cubic meters | 36 | cubic feet | ft ³ |
| m ³ | cubic meters | 1.3 | cubic yards | yd ³ |
| TEMPERATURE (exact) | | | | |
| °C | Celsius temperature | 9/5 (then add 32) | Fahrenheit temperature | °F |

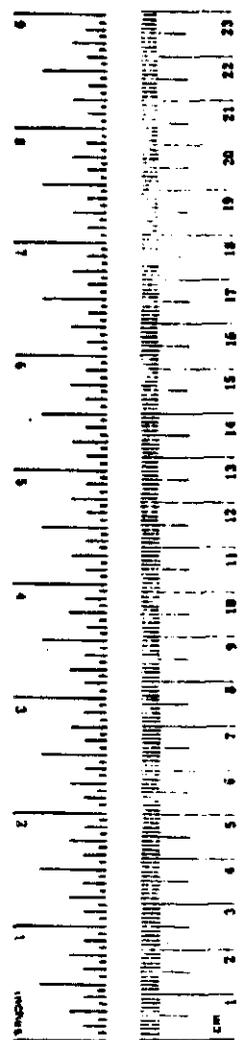

© 1988 by The McGraw-Hill Companies. For other metric conversions and more detailed information, see the Metric Conversion Tables, 2nd Edition, published by The McGraw-Hill Companies, Inc., 1221 Avenue of the Americas, New York, NY 10020.



DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION

TECHNICAL SUMMARY

| | |
|---|-----------------|
| CONTRACTOR | CONTRACT NUMBER |
| University of Southern California | DOT HS-5-01160 |
| REPORT TITLE | REPORT DATE |
| Final Report-Motorcycle Accident Cause Factors and Identification of Countermeasures | January, 1981 |
| REPORT AUTHOR(S) | |
| H. H. Hurt, Jr., J. V. Ouellet, and D. R. Thorn | |

Objectives. Three specific areas were set as objectives in this research: (1) The causes of motorcycle accidents and injuries need to be determined so that all contributions of the motorcycle rider, car driver, roadway features, and motorcycle design are defined, (2) The effectiveness of safety helmets and other protective equipment must be determined because the motorcycle rider has no crash protection unless it is being worn on the body, and (3) Countermeasures must be determined which will prevent motorcycle accidents and reduce injuries.

Methodology. This research was conducted in Los Angeles, California, from July, 1975 until September, 1980 at the Traffic Safety Center of the University of Southern California. A specialized team was formed with engineers, psychologists, medical doctors-pathologists and motorcycle technicians. All members of the research team were required to have motorcycle riding experience so that they could appreciate and understand all hazards peculiar to the motorcycle and its accident problems. This research team underwent six months of special training to achieve a high capability in reconstructing motorcycle accidents, examining safety helmets, evaluating injuries interviewing witnesses, etc. In addition, cooperation was obtained from law enforcement agencies, fire department rescue ambulance services, hospitals and the coroner-medical examiner, so that the research team could have access to accident scenes, interview victims and witnesses and collect injury information.

During 1976 and 1977, the motorcycle accident research team conducted on-scene, in-depth investigations of more than 900 motorcycle accidents by going to the scene of the accident at all times of the day and all days of the week. Each accident was completely reconstructed and approximately a thousand data elements were determined for each accident. Also, 3600 police traffic accident reports were collected in the same area, at the same time, for comparison with the 900 on-scene, in-depth accident cases. During 1978 and 1979, these accident cases were analyzed and exposure data collected at 505 of the 900 reference accident sites. The research teams returned to the accident sites at the same time of day, same day of week and same environmental conditions then interviewed 2310 motorcycle riders and examined their motorcycles. Information was collected about training, experience, education, helmet use, alcohol and drug use, etc., for all these motorcycle riders who were at the same place at the same time of day but not involved in an accident.

The accident data from the 900 on-scene, in-depth cases were analyzed to determine accident and injury causes. Then the exposure data were compared with accident data to determine those factors which were outstanding. For example, only 30% of the

PREPARED FOR THE DEPARTMENT OF TRANSPORTATION, NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
UNDER CONTRACT NO.: DOT HS-5-01160. THE OPINIONS, FINDINGS, AND CONCLUSIONS EXPRESSED
IN THIS PUBLICATION ARE THOSE OF THE AUTHORS AND NOT NECESSARILY THOSE OF THE NATIONAL HIGHWAY
TRAFFIC SAFETY ADMINISTRATION.

motorcycles in the accident data had the headlamp on in daylight but 60% of the motorcycles in the exposure data had the headlamp on in daylight. Such comparison identifies the use of the headlamp on in daylight as a powerful and effective way of reducing accident involvement, by making the motorcycle more conspicuous in traffic.

Motorcycle accidents that occur in Los Angeles are essentially the same as motorcycle accidents that occur in other locations in the United States. The most frequent use of a motorcycle is in favorable weather because there is no protection for the motorcycle rider in bad weather and the motorcycle lacks stability on slippery roadways. Most motorcycle accidents occur in this favorable weather simply because of the more frequent use, and human error is the dominant feature in those accidents. Hence, the factors identified in this research should be common to motorcycle accidents in other regions. The only difference is that the favorable weather of the study area allowed the study of a very large number of motorcycle accidents.

Research Findings. The most common motorcycle accident involves another vehicle causing the collision by violating the right-of-way of the motorcycle at an intersection, usually by turning left in front of the oncoming motorcycle because the car driver did not see the motorcycle. The motorcycle rider involved in the accident is usually inconspicuous in traffic, inexperienced, untrained, unlicensed, unprotected and uninsured and does a poor job of avoiding the collision.

The data of this accident research provide the following principal findings:

(1) Accident and Injury Causes-The automobile driver fails to detect the inconspicuous motorcycle in traffic. This is due to lack of motorcycle and rider conspicuity and lack of caution and awareness of the automobile driver. The lack of skill and traffic strategy increases the motorcycle rider's involvement in collisions. Injury severity increases with collision speed, and the lack of head protection accounts for the most severe but preventable injuries.

(2) Protective Equipment-The only significant protective equipment is the qualified safety helmet, and it is capable of a spectacular reduction of head injury severity and frequency. FMVSS 218 provides a highly qualified safety helmet for use by motorcycle riders. This research shows NO reasons for a motorcycle rider to be without a safety helmet; qualified helmets do not limit vision or hearing in traffic or cause injury.

(3) Countermeasures-The basic Motorcycle Rider Course of the Motorcycle Safety Foundation is effective in training motorcycle riders; those trained riders are both less involved and less injured in motorcycle accidents. This course or its equivalent should be made a prerequisite, or at least corequisite, of motorcycle use and should be applied in driver improvement for those motorcycle riders who have received traffic citations or who have been involved in accidents. Licensing of motorcycle riders should be improved with special motorcycle licenses and improved testing such as has been developed by NHTSA-Traffic Safety Programs. Law enforcement should act to enforce license requirements, identify alcohol-involved motorcycle riders, remove dirt bikes from traffic, and effectively cite and file against culpable accident-involved automobile drivers as well as motorcycle riders. Most motorcycles in accidents are inconspicuous, and the use of headlamps on in daylight and high visibility jackets definitely reduces accident involvement. The use of a qualified safety helmet reduces head injuries significantly and the accompanying eye protection attached to the helmet preserves vision and reduces accident involvement.

TABLE OF CONTENTS

| VOLUME I - TECHNICAL REPORT | Page | |
|-----------------------------|---|----|
| 1.0 | SUMMARY | 1 |
| 1.1 | Objectives | 1 |
| 1.2 | Methodology | 1 |
| 1.3 | Research Findings | 2 |
| 2.0 | INTRODUCTION | 4 |
| 2.1 | Historical Overview | 4 |
| 2.2 | Objectives of the Research | 5 |
| 2.3 | The Study Area | 7 |
| 2.4 | Acknowledgements | 9 |
| 3.0 | DEVELOPMENT OF THE RESEARCH | 12 |
| 3.1 | Technical Approach | 12 |
| 3.2 | Project Schedule | 14 |
| 3.3 | Project Personnel | 15 |
| 3.4 | Data Collection Plan | 15 |
| 4.0 | RESEARCH METHODOLOGY | 17 |
| 4.1 | Liaison and Cooperative Agreements | 17 |
| 4.2 | Team Training | 19 |
| 4.3 | Sampling Plan | 23 |
| 4.4 | Field Data Collection Activities | 24 |
| 4.5 | Quality Control | 30 |
| 4.6 | Data Processing and Analysis | 32 |
| 4.7 | Research Recommendations | 34 |
| 5.0 | ACCIDENT CHARACTERISTICS AND ENVIRONMENTAL FACTORS | 36 |
| 5.1 | USC Accident Data Acquisition | 36 |
| 5.2 | Accident Distribution by Time, Day, and Month | 37 |
| 5.3 | Objects Involved in Collision with Motorcycles | 38 |
| 5.4 | Accident Precipitating Factor | 43 |
| 5.5 | Pre-Crash Vehicle Motions | 46 |
| 5.6 | Accident Scene, Type of Area | 48 |
| 5.7 | Accident Scene Illumination | 49 |
| 5.8 | Accident Scene Weather Conditions at Time of Accident | 49 |
| 5.9 | Trip Plan, Motorcycle Rider and Other Vehicle Driver | 51 |
| 5.10 | Time Riding Before Accident | 53 |
| 5.11 | Motorcycle Roadway | 54 |
| 5.12 | Other Vehicle Roadway | 56 |
| 5.13 | Traffic Density | 57 |
| 5.14 | Traffic Controls | 57 |
| 5.15 | Pre-crash View Obstructions and Limitations to Vision | 59 |
| 5.16 | Animal Involvement | 65 |
| 5.17 | Conspicuity | 66 |

TABLE OF CONTENTS (Continued)

| | Page |
|--|------------|
| 6.0 VEHICLE FACTORS | 69 |
| 6.1 Motorcycle Size and Type | 69 |
| 6.2 Manufacturer of the Accident-Involved Motorcycle | 73 |
| 6.3 Year of Manufacture , or Model Year | 74 |
| 6.4 Predominating Color of the Motorcycle | 74 |
| 6.5 Collision Contact on the Motorcycle | 79 |
| 6.6 Motorcycle Modifications | 79 |
| 6.7 Fuel System Crashworthiness | 81 |
| 6.8 Pre-Crash and Crash Speeds | a4 |
| 6.9 Contributory Tire Conditions | a5 |
| 6.10 Cornering Clearance | 88 |
| 6.11 Pm-Crash Line-of-Sight | 88 |
| 6.12 Crash Bar Effectiveness | 101 |
| 6.13 Vehicle Defects | 108 |
| 6.14 Other Vehicle Involved in the Accident With the Motorcycle | 112 |
| 7.0 MOTORCYCLE RIDER, PASSENGER, AND OTHER VEHICLE DRIVER CHARACTERISTICS | 116 |
| 7.1 Motorcycle Rider Age | 114 |
| 7.2 Motorcycle Rider Sex, Marital Status, Children | 114 |
| 7.3 Motorcycle Rider Height and Weight | 118 |
| 7.4 Motorcycle Rider Occupation and Education | 118 |
| 7.5 Motorcycle Rider License Qualification | 120 |
| 7.6 Motorcycle Rider Traffic Violation and Accident Experience | 120 |
| 7.7 Motorcycle Rider Training Experience | 125 |
| 7.8 Motorcycle Rider Dirt Bike Experience | 125 |
| 7.9 Motorcycle Rider Street Bike Experience | 128 |
| 7.10 Motorcycle Rider Familiarity with Roadway | 130 |
| 7.11 Motorcycle Rider Hand Preference | 130 |
| 7.12 Motorcycle Rider Alcohol and Drug Involvement | 130 |
| 7.13 Motorcycle Rider Physiological Impairment | 136 |
| 7.14 Motorcycle Rider Characteristics, Tattoos | 137 |
| 7.15 Motorcycle Rider Performance, Rider Attention to Driving Task | 137 |
| 7.16 Motorcycle Rider Performance, Rider Stress on Day of Accident | 139 |
| 7.17 Motorcycle Rider Collision Avoidance Performance | 140 |
| 7.18 Motorcycle Rider Loss of Control | 150 |
| 7.19 Motorcycle Passenger Sex | 155 |
| 7.20 Motorcycle Passenger Height and Weight | 155 |
| 7.21 Motorcycle Passenger Occupation | 156 |
| 7.22 Motorcycle Passenger Experience | 156 |
| 7.23 Motorcycle Passenger Alcohol and Drug Involvement | 157 |
| 7.24 Other Vehicle Driver Age | 157 |
| 7.25 Other Vehicle Driver Sex, Marital Status, Children | 157 |
| 7.26 Other Vehicle Driver Education and Occupation | 161 |
| 7.27 Other Vehicle Driver License Qualification | 162 |
| 7.28 Other Vehicle Driver Experience | 162 |
| 7.29 Other Vehicle Driver Alcohol and Drug Involvement | 166 |

TABLE OF CONTENTS (Continued)

| | Page |
|--|------|
| 8.0 HUMAN FACTORS - INJURIES | 169 |
| 8.1 Injuries - General Characteristics | 169 |
| 8.2 Rider and Passenger Positions on the Motorcycle at Crash Impact | 171 |
| 8.3 Motorcycle, Rider and Passenger Motion After Collision Contact | 173 |
| 8.4 On-Scene Medical Assistance and Injury Status, Motorcycle Rider and Passenger | 173 |
| 8.5 Somatic (Body) Region Injuries | 179 |
| 8.6 Head and Neck Injuries (Including Face) | 196 |
| 8.7 Injury Mechanisms, Contact Surfaces | 207 |
| 8.8 Injury Association: Effects of Speed, Alcohol Involvement, and Motorcycle Size on Injury Severity | 212 |
| 8.9 Groin Injuries | 220 |
| | |
| 9.0 HUMAN FACTORS-PROTECTION SYSTEM EFFECTIVENESS | 229 |
| 9.1 Protection Systems - General Characteristics, Helmets | 229 |
| 9.2 Eye Protection | 233 |
| 9.3 safety Helmet use Characteristics | 241 |
| 9.4 Helmet Manufacturer and Construction | 259 |
| 9.5 Safety Helmet Retention System Performance | 264 |
| 9.6 Safety Helmet Weight | 268 |
| 9.7 Safety Helmet Color | 270 |
| 9.8 Safety Helmet Impact Analysis | 270 |
| 9.9 Safety Helmet-Effectiveness: Head and Neck Injury Type of Lesion | 279 |
| 9.10 Safety Helmet Effectiveness: Head and Neck Injury Severity | 282 |
| 9.11 Safety Helmet Effectiveness: Overall Severities Sum (SS) and Head and Neck Severities Sum (SS2) | 282 |
| 9.12 Safety Helmet Effectiveness: Head and Neck Injury Region | 285 |
| 9.13 Safety Helmet Effectiveness: Neck Only Injury Severity | 292 |
| 9.14 Effect of Helmet Coverage on Motorcycle Rider Most Severe Head Injury | 293 |
| 9.15 Effect of Helmet Coverage on Motorcycle Rider Most Severe Face Injury | 295 |
| 9.16 Effect of Helmet Coverage on Motorcycle Rider Most Severe Neck Injury | 299 |
| 9.17 Effect of Eye Protection on Motorcycle Rider Most Severe Face Injury | 303 |
| 9.18 Effect of Eye Protection on Motorcycle Rider Most Severe Eye Injury | 307 |
| 9.19 Motorcycle Rider Most Severe Injury, Somatic Regions | 308 |
| 9.20 Effect of Upper Torso Garment on Most Severe Upper Torso Injury | 311 |
| 9.21 Effect of Lower Torso Coverage on Most Severe Lower Torso Injury | 312 |
| 9.22 Effect of Foot Coverage on Most Severe Ankle-Foot Injury | 316 |
| 9.23 Effect of Hand Protection on Most Severe Hand Injury | 319 |

TABLE OF CONTENTS (Continued)

| | | Page |
|--------------|---|------------|
| 9.24 | Helmet Use Related to Hearing Critical Traffic Sounds | 323 |
| 9.25 | Injuries Attributed to Safety Helmets | 324 |
| 9.26 | Rider Fatigue and Helmet Use | 3 2 4 |
| 9.27 | Safety Helmet Performance Related to FMVSS 218 | 324 |
| 9.28 | Videotape and Movie Film Project | 327 |
| 10.0 | EXPOSURE DATA | 329 |
| | Environmental Factors | 3 2 9 |
| 10.1 | Rider Trip Plan | 329 |
| 10.2 | Time Riding Motorcycle Before Interview | 329 |
| 10.3 | Median Traffic Flow | 330 |
| 10.4 | Weather | 333 |
| | Vehicle Data | 335 |
| 10.5 | Motorcycle Size and Type | 335 |
| 10.6 | Manufacturer of Motorcycles | 335 |
| 10.7 | Year of Manufacture, or Model Year | 335 |
| 10.8 | Predominating Color of the Motorcycle | 335 |
| 10.9 | Motorcycle Modifications | 335 |
| 10.10 | Headlamp Usage | 337 |
| | Human Factors | 346 |
| 10.11 | Motorcycle Rider Age | 346 |
| 10.12 | Motorcycle Rider Sex, Marital Status, Children | 346 |
| 10.13 | Motorcycle Rider Height and Weight | 346 |
| 10.14 | Motorcycle Rider Occupation and Education | 346 |
| 10.15 | Motorcycle Rider License Qualification | 350 |
| 10.16 | Motorcycle Rider Traffic Violation and Accident Experience | 350 |
| 10.17 | Motorcycle Rider Training Experience | 351 |
| 10.18 | Motorcycle Rider Dirt Bike Experience | 352 |
| 10.19 | Motorcycle Rider Street Bike Experience | 352 |
| 10.20 | Motorcycle Rider Familiarity with the Roadway | 353 |
| 10.21 | Motorcycle Rider Hand Preference | 354 |
| 10.22 | Motorcycle Rider Alcohol and Drug Involvement | 354 |
| 10.23 | Motorcycle Rider Permanent Physiological Impairment | 355 |
| 10.24 | Motorcycle Rider Tattoos | 356 |
| 10.25 | Motorcycle Rider Attention to Driving Task | 356 |
| 10.26 | Motorcycle Rider Stress on Day of Interview | 358 |
| 10.27 | Motorcycle Rider Stated Front Brake Use | 358 |
| 10.28 | Motorcycle Passenger Involvement | 359 |
| 10.29 | Motorcycle Rider and Passenger Protective Equipment | 359 |
| 10.30 | Sample Population Data From Motor Vehicle and Driver License Registry | 375 |
| 11.0 | COMPARISONS OF ACCIDENT AND EXPOSURE DATA | 382 |
| | Conspicuity Factors | 382 |
| 11.1 | Motorcycle Size-Engine Displacement | 382 |
| 11.2 | Motorcycle Color | 383 |
| 11.3 | Motorcycle Modifications Which Affect Conspicuity | 384 |
| 11.4 | Headlamp Use | 385 |

TABLE OF CONTENTS (Continued)

| | Page |
|---|-------------|
| 11.5 High Visibility Upper Torso Garment | 388 |
| 11.6 Helmet Color | 388 |
| Motorcycle Rider Licensing and Training | 389 |
| 11.7 Driver License Qualification | 389 |
| 11.8 Motorcycle Rider Training Experience | 390 |
| 11.9 Motorcycle Rider Street Bike Experience | 391 |
| 11.10 Dirt Bike Experience | 392 |
| Motorcycle Rider Characteristics | 392 |
| 11.11 Motorcycle Rider Age | 392 |
| 11.12 Motorcycle Rider Sex, Marital Status, Children | 393 |
| 11.13 Physical Characteristics | 395 |
| 11.14 Motorcycle Rider Education and Occupation | 396 |
| 11.15 Motorcycle Rider Attention, Stress and Physiological Impairment | 397 |
| 11.16 Alcohol and Drug Involvement | 398 |
| 11.17 Tattoos, Hand Preference | 399 |
| 11.18 Motorcycle Rider Driving Record | 400 |
| 11.19 Route Familiarity, Trip Plan, and Motorcycle Use | 400 |
| 11.20 Motorcycle Rider Protective Equipment | 402 |
| Vehicle Factors | 405 |
| 11.21 Motorcycle Manufacturer | 405 |
| 11.22 Motorcycle Size-Engine Displacement | 406 |
| 11.23 Motorcycle Type | 408 |
| 11.24 Motorcycle Modifications | 409 |
| Characteristics of the Other Vehicle Driver | 411 |
| 11.25 Age and Sex | 411 |
| 11.26 Other Vehicle Driver License Qualification and Driving Experience | 414 |
| 11.27 Alcohol and Drug Involvement | 414 |
| 11.28 Other Vehicle Type | 414 |
| 12.0 FINDINGS, RECOMMENDATIONS AND PROPOSED COUNTERMEASURES | 416 |
| 12.1 Findings | 416 |
| 12.2 Recommendations and Proposed Countermeasures (Training, Licensing, Law Enforcement, Protective Equipment, Conspicuity, Federal Motor Vehicle Safety Standards) | 419 |
| 13.0 REFERENCES | 424 |
| VOLUME II - APPENDIX AND SUPPLEMENTAL DATA | |
| A. TERMINOLOGY | |
| B. FIELD DATA COLLECTION FORMS | |
| C. SUPPLEMENTAL ACCIDENT DATA | |
| D. SUPPLEMENTAL EXPOSURE DATA | |

1.0 SUMMARY

1.1 Objectives

Motorcycle accidents are a very special and severe problem. The fatalities due to motorcycle accidents are approaching five thousand per year, and **have** the prospect of further increase unless **effective** countermeasures are instituted. At present time motorcycle accidents account for approximately ten percent of the total traffic accident fatalities, but the motorcycle is only one to two percent of the vehicle population on the street in traffic.

The objectives of this research were to conduct a detailed investigation and analysis of a large number of motorcycle accidents with a highly specialized multidisciplinary research team. In this way, complete engineering and medical information could be collected and all of the accident events could be reconstructed to determine accident and injury causes. This scientific, multidisciplinary approach could provide much more exact and complete information than **was** available from police traffic accident reports.

Three specific areas were set as objectives in this research:

1. The causes of motorcycle accidents **and** injuries need to be determined accurately so that all contributions of the motorcycle rider, car driver, roadway features and motorcycle **design** are defined.

2. The effectiveness of safety helmets, and other protective **equipment**, must be determined because the motorcycle rider has no crash protection unless it is being worn on the body.

3. Countermeasures must be determined which will prevent motorcycle accidents and reduce injuries. Most accidents are preventable, and motorcycle accidents are unique and different but preventable if the causes and cures are **known**. The purpose of this research was to determine exactly those causes and cures.

1.2 Methodology

This research was conducted in Los Angeles, California from July, 1975 until September, 1980, at the Traffic Safety Center of the University of Southern California. A specialized research team was formed **with** engineers, psychologists, medical doctors and data processing specialists. All members of this research team were required to have motorcycle riding experience so that they could appreciate and understand all hazards peculiar to the motorcycle and its accident problems. This research team underwent six months of special training to achieve a high capability in reconstructing motorcycle accidents, examining accident helmets, evaluating injuries, interviewing witnesses, etc. In addition, cooperation was **obtained** from the law enforcement agencies, fire department rescue **ambulance** services, hospitals and the medical examiner-coroner, so that the research team could have access to accident scenes, interview victims and witnesses, and collect injury information.

During 1976 and 1977, the motorcycle accident research team conducted on-scene, in-depth investigations of more than 900 motorcycle accidents by going to the accident scene at all times of the day and all days of the week. Each accident was completely reconstructed and approximately a thousand data elements were determined for each accident. Also, 3600 police traffic accident reports were collected in the same area at the same time for comparison with the 900 on-scene, in-depth accident investigations.

During 1978 and 1979, these accident cases were analyzed and exposure data were collected at 505 of the 900 accident sites. The research teams returned **to the accident sites** at the same time of day, same day of the week and same weather conditions, and interviewed 2310 motorcycle riders and examined their motorcycles. Information was collected about training, experience, education, helmet use, alcohol and drug use, etc. for all of these motorcycle riders who were at the same place at the same time of day but not involved in an accident.

The accident data from the 900 on-scene, in-depth cases were analyzed to determine accident and Injury causes. Then the exposure data was compared with the accident data to determine what factors were outstanding. For example, only 30% of the motorcycles in the accident data had **the headlamp** on in daylight, but 100% of the motorcycles in the exposure data had the headlamp on in daylight. This comparison identifies the use of the motorcycle headlamp on in daylight as a powerful and effective way of reducing accident involvement, by making the motorcycle more conspicuous in traffic.

Motorcycle accidents that occur **in Los Angeles** are essentially the same as motorcycle accidents occurring in other locations in the United States. The most frequent use of a motorcycle is in favorable weather because there **is** no protection for the motorcycle rider in bad weather and the motorcycle lacks stability on slippery roadways. Also, most motorcycle accidents occur in favorable weather simply because of the more frequent use, and human error predominates in those accidents. The motorcycle accidents studied in Los Angeles are essentially the same as motorcycle accidents occurring in other locations in the United States; **the** Los Angeles area simply had MORE motorcycle accidents available to investigate and study.

1.3 Research Findings

The most common motorcycle accident involves another vehicle causing the collision by violating the right-of-way of the motorcycle at an intersection, usually by turning left in front of the oncoming motorcycle because the car driver did not see the motorcycle. The motorcycle rider involved in the accident is usually inconspicuous in traffic, inexperienced, untrained, unlicensed, unprotected and does a poor job of avoiding the collision.

The data of this accident research provide the following principal findings:

1. Accident and Injury Causes. The automobile driver fails **to** detect the **inconspicuous** motorcycle in traffic. This is due to the lack of motorcycle conspicuity and lack of caution and awareness of the automobile driver.

The **lack of** skill and traffic strategy **increases the motorcycle rider's** involvement in collisions. **Injury** severity increases with collision speed, but the motorcycle rider's lack of head protection accounts for the **most** severe but preventable injuries. Also, motorcycle rider lack of collision avoidance skills increases injury severity.

2. Protective Equipment. The only **significant** protective equipment is the qualified safety helmet, and it is capable of a spectacular reduction of head injury frequency and severity. The Federal Motor Vehicle Safety Standard 218 provides a highly qualified safety helmet for use by motorcycle riders. This research *shows NO reasons* for a motorcycle rider to be without a safety helmet; qualified helmets do not limit vision or hearing in traffic or cause injury.

3. Countermeasures. The basic Motorcycle Rider Course of the Motorcycle Safety Foundation is effective in training motorcycle riders and those trained riders are both less involved and less injured in motorcycle accidents. This course--or its equivalent--should be made a prerequisite, or at least a corequisite, of motorcycle use and should be applied in driver Improvement for those motorcycle riders **who** have received traffic citations. Licensing of motorcycle riders must be improved with special motorcycle licenses and improved testing such as has been developed by NHTSA-Traffic Safety Programs. Law enforcement should act to enforce license requirements, identify **alcohol-**involved motorcycle riders, remove dirt bikes from traffic, and effectively cite and file against culpable accident-involved automobile drivers as well as motorcycle riders.

Most motorcycles in accidents are inconspicuous, and the use of the headlamp on in daylight and high visibility jackets definitely reduces accident involvement. The use of a qualified safety helmet reduces head injuries significantly and the accompanying eye protection attached to the *helmet* preserves vision and reduces accident involvement.

All motorcycle riders need training, licensing, citation-related driver improvement, headlamps on at all times, bright upper torso garments, and head and eye protection to reduce accident involvement and injury frequency and severity.

2.0 INTRODUCTION

2.1 Historical Overview

The use of the motorcycle in traffic has increased greatly in recent time. During the last ten years, motorcycle registrations have more than doubled and, unfortunately, the number of motorcycle **accidents and** injuries has increased by approximately the **same** factor. The most recent statistics show that the number of fatalities attributed to motorcycle traffic accidents is approaching five thousand per year. At **present time**, motorcycle accidents contribute nearly 10% of the traffic accident fatalities while motorcycles are only one or two percent of the vehicles in traffic. In this way, the motorcycle appears to be the most dangerous form of motor vehicle transport.

This problem has not escaped notice, and much research has defined the obvious hazard and revealed **many** of the critical factors in motorcycle accidents. Elementary considerations clearly established the prospects for injury of the motorcycle rider involved in collision with another motor vehicle, simply because of the lack of a protective envelope available within the conventional automobile. Also, similar fundamental considerations established the beneficial effects of the use of the contemporary motorcycle safety helmet in preventing and reducing the deadly injuries to the vulnerable head. In addition, the lack of conspicuity of the motorcycle in traffic was identified as a special problem occurring frequently in accidents, and effectively treated by the use of the headlamp during daylight and the wearing of high visibility clothing.

A critical contribution to the state of knowledge about motorcycle safety **was** the Second International Congress on Automotive Safety, in which the conference theme **was** Motorcycle and Recreational Vehicle Safety. This conference was sponsored by the National Motor Vehicle Safety Advisory Council of the U.S. Department of Transportation and the Society of Automotive Engineers. The literature generated by this activity represented a great increment of progress in motorcycle safety, and provided a true foundation for further research.

In spite of the critical accident factors being identified by past research and collected scientific opinions, there was a developing demand for accident data to expose the special details of motorcycle accident problems, as well as to substantiate those collected scientific opinions and past research. There were important but unanswered questions about motorcycle rider culpability, accident injury mechanisms, safety helmet effectiveness and the possibility of helmet-induced injuries, collision avoidance performance of the motorcycle rider, aggressive acts toward motorcycle riders by the drivers of automobiles, and the factors affecting the conspicuity of motorcycles.

It became apparent that the most serious questions about motorcycle accidents could not be answered by the research based upon police traffic accident reports. First, the police traffic accident reports could not be used to extend and synthesize specialized information on accident and injury causation, and second, the reconstruction of motorcycle accidents required knowledge and skills far beyond the activity typical of a police traffic accident report.

The collision dynamics and rider kinematics of motorcycle accidents were defined (Bothwell, 1973), the peculiarities of motorcycle accident investigation were described (Hurt, 1973) the limits of police traffic accident applications were defined (Reiss, Berger and Valette, 1974), and the first motorcycle multidisciplinary accident research activity demonstrated the depth of data available (Newman, 1974).

With this foundation, the requirement for extensive accident data was established, the methodology for data collection and synthesis was developed, and the applications to countermeasures were needed urgently.

2.2 Objectives of the Research

There were three basic objectives of the research. These are listed as follows:

1. To determine the causal factors of motorcycle accidents and distinguish the human, vehicular and environmental factors involved

2. To evaluate safety equipment, clothing and rider protective devices, and the motorcycle features which contribute to the serious and fatal injuries to the rider and passenger

3. To identify and define countermeasures that are conclusive, can be implemented, and which would reduce the rate and severity of motorcycle accidents

In order to support these objectives, it was necessary to complete the following investigations:

On-scene, In-depth Investigations

On-scene, in-depth investigations were conducted on at least 900 motorcycle accidents in the study area. These multidisciplinary investigations were limited to focus upon the motorcycle rather than the other vehicle involved in the collision, and all components of precrash, crash and post-crash environmental, vehicle and human factors were examined in detail. Both single and multiple vehicle accidents were considered, as were both rural and urban accidents. Also, special effort was directed to the investigation of at least two-thirds of the accidents as soon as possible after the accident event, before the vehicles had been moved from the scene so that perishable evidence was recorded accurately. Motor Vehicle Safety Standards and Highway Safety Program Standards which related directly to the motorcycle accident were evaluated for compliance and effectiveness.

The multidisciplinary accident research team had objectives of accurate collection and synthesis of data for these on-scene, in-depth investigations and the team personnel included a Motorcycle Specialist, Highway Safety Engineer, Interviewer/Psychologist, Medical Doctor/Pathologist and various specialists and consultants in the areas of helmet technology, accident reconstruction, head and neck injury, and data analysis. In addition, all accident investigation team members were required to have extensive experience riding street motorcycles.

Analysis of Police Traffic Accident Reports

Examination and analysis was conducted on at least 3600 police traffic accident reports of motorcycle accidents which occurred in the same study area in the same period of time as the 900 on-scene, in-depth accident investigations. These traffic accident reports were collected from the cooperating law enforcement agencies and analyzed and compared with the results from the 900 on-scene, in-depth accident cases. Of course, most of the 900 on-scene, in-depth accident cases were included within the set of the 3600 police traffic accident reports. However, there were some exceptions since a number of the on-scene, in-depth accident investigations did not have a corresponding traffic accident report because of lack of injury, lack of damage, lack of reporting, or lack of law enforcement response because of **other** priorities. Thus, the 900 on-scene, in-depth cases do not represent a complete subset of the 3600 police traffic accident reports.

Comparison of Police and On-scene, In-depth Accident Reports

The investigation and analysis of the two sets of accident data included at least the following variables:

| | |
|--------------------|-------------------------|
| Type of collision | Helmet use |
| Age | Injury severity |
| Sex | Weather conditions |
| Time | Road surface conditions |
| Type of motorcycle | Accident location |
| Roadway alignment | |

Helmet Analysis, Injury Analysis

The accident-involved safety helmets were examined in the greatest detail to determine protection performance. A original objective was to sample the accident population so that about 50% of the 900 on-scene, in-depth cases **would** include helmeted motorcycle riders, but this objective had to be modified simply because of the actual underrepresentation of helmeted riders in the accident data. Throughout the collection period of the accident data, it was typical that approximately 50% of the motorcycle riders in traffic were using safety helmets but **only 40%** of the accident-involved riders were wearing a safety helmet. **Consequently**, the decision was made to collect the accident data without specific requirement for helmet use and **to** sample the accidents on a "as is" basis to best determine the actual accident involvement of helmeted riders.

The records of medical treatment of injuries were collected and, in most cases, the injuries were observed directly **at** the accident scene or treatment facility. Special attention was devoted **to** the detection of any neck injuries and their possible association with helmet use. All of the discrete injuries were encoded using the Occupant Injury Classification, and the severity was scaled using the Abbreviated Injury Scale of the American Association for Automotive Medicine. The reconstruction of accident events defined the injury producing elements, the sequence of body contacts and the causes of injury to the motorcycle rider and passenger.

Exposure Data

Exposure data elements **were** collected at a minimum of 500 of the locations of the 900 on-scene, in-depth accident cases. These locations were randomly selected so that the characteristics of the study area would be represented without bias, and the population-at-risk would be accurately defined. Actually 505 locations were used to collect traffic characteristics and **information** on 2310 motorcycle riders at the same time-of-day, same day-of-week, and same environmental conditions as the related accidents.

The original objective **was** to collect such exposure data as soon as possible after the occurrence of the related accident, but unexpected delays in funding prevented the timely collection of these exposure data. Under these conditions it **was** possible that significant changes could occur in the population-at-risk and degrade the planned comparison of accident and exposure data. Benchmark data were collected on certain critical items such as safety helmet use and headlamp use in daylight, **so** that reference would be available for later comparisons.

Accident and Exposure Data Comparisons

A comprehensive analysis of the accident and exposure data **was** conducted and oriented **toward** determining the relationships between the different variables of the motorcycle, environment and motorcycle rider. As a result of these analyses, **countermeasures were** identified which are practical and can be applied for the prevention of motorcycle **accidents** and reduction of injuries.

2.3 The Study Area

Selection of the Study Area

The Southern California region contributes a large quantity of motorcycle accidents, primarily because of a substantial motorcycle population and favorable weather which encourages year-round use of motorcycles. **However**, not all of this large population of motorcycle accidents is easily accessible for on-scene, in-depth investigation of those accidents. This aspect of accident accessibility **was** the critical factor in defining the study region for this research.

Los Angeles County records approximately five thousand motorcycle accidents per year with about 140 fatal accidents **among** that group. Within Los Angeles County there are approximately **sixty** law enforcement jurisdictions or divisions, which complicates accident accessibility and greatly extends **communications** requirements. During the first phase of this research, these complications were too **great** to allow coverage of the entire Los Angeles County for accident sampling.

The study area **was** then reduced to the City of Los Angeles **so** that communications and logistics could be simplified and attention could be focused upon the requirements for accident notification and accessibility. The city of Los Angeles reports approximately two thousand five hundred motorcycle accidents per year, with forty to forty-five fatalities within that group.

In this study area of the City of Los Angeles there are only **two law enforcement jurisdictions**, the Los Angeles Police Department and the California Highway Patrol. Both of these agencies have demonstrated a high level of support for previous accident research activities conducted by the University of Southern California. Also, within the City of Los Angeles, all rescue ambulance services are provided by the Los Angeles Fire Department, so the dispatch of emergency medical service to the scene of any motorcycle accident is done by this single agency.

Chief John C. Gerard provided the cooperation of the Los Angeles Fire Department through the motorcycle accident notifications provided by Rescue Ambulance dispatchers; Chief Daryl F. Gates provided the cooperation of the Los Angeles Police Department through accident notifications, copies of traffic accident reports, and access to the scene of accidents; Commissioner Glenn B. Craig provided the cooperation of the California Highway Patrol in the area with accident notifications, traffic collision reports and access to the scene of accidents; Dr. Thomas T. Noguchi provided the cooperation of the Los Angeles County Medical Examiner-Coroner in the cases of fatal accidents. The cooperation of these four agencies allowed the research teams to collect accident data within the area of approximately 470 square miles of the City of Los Angeles.

Representativeness of the Study Area

The study area of the City of Los Angeles is not **particular** representative of other areas of the United States in terms of climate and geography. However, the motorcycle accidents within the study area **are essentially identical** to motorcycle accidents in other **areas** of the United States. It is **expected** that **some general** characteristics of motorcycle accidents will show regional variations, but **critical** characteristics of various accident types will be essentially the same.

For example, consider weather as a factor in motorcycle accidents. A critical issue for consideration **is** that the motorcycle is NOT an all-weather vehicle and it does NOT have accident characteristics like automobiles. All past and present research as well **as** this present study have shown that weather simply is NOT a factor in motorcycle accidents; the weather at the scene of a motorcycle accident is clear and dry in more than 904 of the accident cases. Environmental factors contribute in a minority of accident cases, **i.e.**, less than five percent of the accident cases. The motorcycle accidents which occur in fair weather in **other** parts of the United States are essentially identical to the motorcycle accidents which occur in fair weather in the selected study area. The few motorcycle accidents which occur in truly adverse weather are only a minute part of the total motorcycle accident problem. When there is snow, ice and water on the road, cars and trucks suffer from a loss of traction and are involved in accidents more frequently, but the motorcycles are stored in the garage or carport and the motorcycle rider is using some other form of transportation!

The distinguishing factor for the Los Angeles area is that the high incidence of favorable weather allows greater use of the motorcycle and this additional exposure generates more accidents, but **not significantly different** accidents. The major elements of accident **and injury** causation are well.

represented by the large quantity of accident data from this study area of Los Angeles, since the greatest part of all motorcycle accidents occur under similar favorable environmental conditions.

The study area is predominantly urban and suburban, with rural land use diminishing as in similar metropolitan areas. The street motorcycle is traditionally a vehicle associated with urban rather than rural life, and the accident characteristics should be peculiar to the vehicle type rather than land use. Consequently, the accident data collected and analyzed here will show accident characteristics of helmet effectiveness, injury mechanisms, collision avoidance performance, etc., which are **more** appropriate to the accident configuration rather than the land use at the accident site.

California does not have laws requiring the use of motorcycle safety helmets, eye protection, headlamps on in daylight. etc. While this situation **may** be unfortunate from the standpoint of accident and injury prevention, the accident population offers a good sample to evaluate the effectiveness of those items as accident and injury countermeasures. California does have a requirement for a special motorcycle license which is obtained by a special written examination and separate skill test, **so** this factor can be evaluated for its effectiveness as an accident countermeasure.

These factors describe the study **area** as generally representative for the purposes of analyzing the special characteristics of motorcycle accidents, and the findings, conclusions and recommended countermeasures will be applicable to the greatest part of motorcycle accidents in the United States. The special characteristics of motorcycle accidents related from this research **will** be found to be essentially identical to those motorcycle accidents occurring in other areas.

2.4 Acknowledgements

Many people contributed in important and critical ways to the collection and analysis of these motorcycle accident data, and the progress of this research.

. Nicholas G. Tsongos is the Contract Technical Manager for this research. His guidance, support, leadership and encouragement were critical elements in this research work, and were greatly appreciated.

- William E. Scott is the Director of the National Center for Statistics and Analysis and his interest and support for high quality, scientific research is encouraging to all researchers in traffic safety.

- Lewis S. Buchanan of Traffic Safety Programs at **NHTSA** has given valuable advice and support for this project. His Interest and concern for high quality factual research in motorcycle safety was stimulating to the research **team**.

- Don **Mela** and Henri A. Richardson of the Mathematical Analysis Division of NCSA have given valuable guidance in the directions of data analysis and this interest was greatly appreciated.

• **Ivan J. Wagar**, President of the Safety Helmet Council of **America**, **has** advised and counselled the research team in many important **ways**. His personal contributions of time and energy are so great that his help is **truly** without equal.

One of the most important contributions was that arrangement of **SHCA** membership to provide replacement helmets for the accident-involved motorcyclists. **This** support was crucial for obtaining the accident-involved helmets for detailed **examination** and analysis.

. Alan Jones, Ran **Hooper**, David Sandiford and Jim Young of Electrofilm donated many replacement helmets and assisted the research team in helmet analysis and accident replication.

• Dean Fisher, Frank Falley, Jim **Sundahl**, and Dee **Tryon** of Bell Helmets donated many replacement helmets and assisted the research team in helmet analysis.

• **Lynda** Montgomery of American Sports donated many replacement helmets.

. Pat **Donnelly** of Shoefi donated many replacement helmets.

• Ken Miller of Florida Safety Products, Dick Lash of Abadon-NJL, and Ray M. Drake of American Safety, also donated replacement helmets.

• Daryl **F. Gates** is Chief of the Los Angeles City Police Department. The cooperation and assistance of LAPD officers **was vital** to all the research **activities**, and this help was given freely with obvious priority and support for scientific accident research.

• Glen B. Craig is Commissioner of the California Highway Patrol. The cooperation and assistance of CHP officers was vital to the investigation of those accidents on highways and freeways in the study area. This help was always given with clear support for scientific accident research.

• John C. Gerard is Chief Engineer of the Los Angeles City Fire Department. The cooperation of the Operations Control Division, the Rescue Ambulance Dispatchers, and the Rescue Ambulance crews was vital to accident notification and data collection procedures.

• Dr. Thomas T. Noguchi is the Chief Medical Examiner-Coroner of the county of LOS Angeles. The support and assistance from this office was vital and always reflected the highest scientific capabilities and professional research interests.

• Dr. Harriet Smith **McMurria** **was** the Medical Consultant for the research team and her interest and devotion to this project was greatly appreciated.

• Jon S. **McKibben** was the Principal Consultant to the research team and his advice and counsel in all areas of accident reconstruction and motorcycle technology was a vital ingredient for the research, and contributed significantly to the collection of accident data.

• Carl **Arrowood** and Phil Sheets of Kawasaki provided much help to the research team in advising on the legal problems of accident data collection. This **legal** and technical advice was often used during the data collection activities.

. Dr. James A, Newman served as the Consultant to the research team in helmet technology and head and neck injury analysis, and his contributions were vital to the collection of quality data.

• Dr. G. A. Fleischer served as the Consultant to the research team in data processing and analysis and his guidance was critical to the collection and analysis of the accident data.

• Chet Hale, Dick Madsen, and Russ Daly of Honda were always available for technical assistance and information.

Also, special thanks are due to **Takenori Yamamoto** of Honda R & D. **Yamamoto** worked as a visiting scholar with the research teams in field investigations, accident reconstruction, and data analysis. This special interest in applying accident data to vehicle design reflects a true concern for safety.

. Leo Lake and Monte Hayakawa of Yamaha were always available for technical assistance and Information.

• Lynn Hippleheussr was the producer of the film project on "Helmet Effectiveness," and his special talent and skill were the critical ingredients in that production.

Finally, there were hundreds of motorcycle riders who participated in this research and cooperated with the research team and gave interviews and information about themselves and their accidents. The common thought among these riders was that they wanted this information about their accident to help other motorcycle. riders.

3.0 DEVELOPMENT OF THE RESEARCH

3.1 Technical Approach

A motorcycle accident is actually a **very** complex event, involving the interaction of many complicated human, vehicle, and environmental factors. In this **way**, it is no different from the more typical motor vehicle accident involving the contemporary passenger sedan. However, the motorcycle accident involves special **areas** of vehicle systems, vehicle dynamics, and **human** factors and requires special considerations for the accurate **collection** of accident data.

Accident investigation methodology for motor vehicles such as automobiles and trucks is developed and practiced to a high degree of refinement. The state-of-the-art is such that **most cause** factors can be determined by the in-depth analysis of the engineering, physiological, psychological, environmental, etc., factors. The very great majority of trucks and cars have great commonality of vehicle systems, vehicle dynamics, and human factors related to accident causation. When considered carefully, the collision speed analysis of a truck accident can employ the **same** methodology as is employed in the speed analysis of a passenger car accident.

The investigation of motorcycle accidents poses different and confounding problems even at present time. The mechanical systems of motorcycles are vastly different from the mechanical systems of automobiles: the stability and control of the single-track vehicle is spectacularly different from that of the conventional automobile; the collision dynamics of the motorcycle are far different from those of conventional automobiles, and related injury mechanisms require special study. **The** analysis of pre-crash speeds, skid marks, crash contact conditions, and post-crash dynamics in motorcycle accidents involves many factors uncommon to the analysis of automobile accidents. As a result, the methodology of motorcycle accident investigation **is** not well practiced and the state-of-the-art is such that most motorcycle traffic accidents receive only casual **or** perfunctory investigation. In turn, the entire body of previous motorcycle accident data has low credibility and safety **countermeasures** are difficult to verify and validate.

There are many serious questions in motorcycle accidents regarding injury mechanisms, vehicle defects, alcohol involvement, and validation of vehicle and program safety standards. The answers to these questions, and the development of effective safety countermeasures strategies, will depend in great part on the development of a successful accident **investigation** and analysis methodology. For these reasons, the technical approach used in this research had to employ a strategy that produced credible and valid results.

In order to produce the required quality of accident data it was necessary to staff and train the research team for the specific objectives. The prerequisite of the research team member **was** street motorcycle riding experience. The priority for such experience was established for all team members so that the critical perspective would be given to all areas of data collection.

Also, all members of the research team were required to develop a substantial knowledge of motorcycle mechanical systems, motorcycle accident injury mechanisms, and motorcycle vehicle dynamics. This was necessary so that a

common ground of terminology and data would be established throughout the research team. Consequently, a special training program was developed by and for team members. In addition to the members of the proposed research team, it was necessary and desirable to include personnel from outside the team from cooperating agencies and organizations. e.g., law enforcement, rescue services, coroner-medical examiner, etc. Special lectures were prepared and conducted for cooperating agencies.

The content of the staff training program **was** directed to the specialized areas necessary for the motorcycle accident investigation process. The approximate content of this special instruction **was** as follows:

Vehicle Systems. Electrical systems, ignition, lights, accessories, signals, suspensions, forks, dampers, seals, damage, maintenance, shocks, wear and degradation, swing arm structures, frame integrity. Engines and transmissions. wear and degradation, clutch and shifter, controls, cable maintenance and failure analysis, chains and sprockets, shafts and gear housings, surge and snatch. Fuel systems, slide and **CV** carburetors, **tank** integrity, crash fires, analysis of fire origin. Wheels and brakes, spoked and solid wheels, **hubs, drum and disk brakes**, controls, mechanical and hydraulic, failure and malfunction analysis. Tires, tubes, characteristics, street, universal, **off-road**, trials and knobbies, skid marks analysis, failure analysis. **Motorcycle** defect investigation techniques. Street, **enduro**, trail, MX, desert, etc., case studies.

Injury Mechanisms. Car-motorcycle collision analysis, **motorcycle-stationary object** collision analysis, fall analysis. **Motorcycle-rider-car-object** collision contact conditions. Anatomical matters, injury physiology associated with motorcycle accidents. Abrasion, impact, penetration, fracture, burns, protection technology. Head injury, concussion, fracture, fracture and depression, brain and skull injury mechanics, vulnerability areas, **contre-coup** injury. Safety helmet design and manufacture, relation to standards and injury protection, ANSI Z-90 **SHCA, Snell, FMVSS 218**; retention, impact attenuation, penetration resistance. Test qualification, relation to injury analysis, test process, wire guide and monorail **test** systems. Failure analysis, injury correlation.

Vehicle Dynamics. Motorcycle equilibrium conditions, steady and accelerated motion. Normal, side, and traction force requirements. Anatomy of a turn, transient and steady conditions. Acceleration and braking performance, representative motorcycles. Tire characteristics, camber and cornering stiffness. Longitudinal motions, two-stroke surge, wheelies, **end-overs**. Lateral-directional motions, slide-out or low side, high-side, tank-slapper, limits of cornering; lateral-directional dynamics, capsize, weave and wobble modes, pitch-weave, load effects. Applications to accident reconstruction; considerations of vehicle characteristics, defect related areas, effect of rider experience, roadway conditions, collision avoidance performance of motorcycles.

Accident Reconstruction. Case studies, collision contact conditions, injury sources, speed analysis, trajectory calculations, loss of control analysis.

Vehicle Familiarization. Operation and practice with street bikes, **semi-choppers**, etc., skid mark, **scrapemark** analysis.

Past experience at University of Southern California has shown that research and teaching activities are best related to public needs when these **activities** are guided by the advice of experts in the appropriate field. It is of great value to provide the research staff with the advice and counsel of experts who **can** provide a special level of independent consultation.

Because of the concern for developing educational and research programs in the field of motorcycle safety, a USC Advisory Committee for Motorcycle Safety wee formed. This advisory committee provides expert advice and counsel for all present and future activities in motorcycle safety and guarantees that these activities best serve the public interest.

The membership of the USC Advisory Committee for Motorcycle Safety is es follows: Mr. Ivan J. Wagar, (Chairmen), President of Safety Helmet Council of America, Dr. John P. Stapp, Professor of **Human** Factors, USC Institute of Safety and Systems Management, Dr. Gerald A. Fleischer, Professor, Industrial and Systems Engineering, USC School of Engineering. Mr. Jon S. McKibben, **President**, **McKibben** Engineering Corporation end Lecturer in Safety, USC, Mr. Chet Hale, Vice President, Technical Division, American Honda Motor Co., Inc., Dr. Irving Rehman, Professor of Anatomy, USC School of Medicine, Dr. David H. Weir, Consultant, Mr. H. H. Hurt, Jr., Professor of Safety, USC Institute of Safety and Systems Management.

The advisory committee end its individual members have served to advise the Institute of Safety and Systems Management on all activities in motorcycle safety such as motorcycle accident investigation methodology, accident cause factors, injury mechanisms, safety countermeasures development, safety education **courses**, and vehicle technology.

This expert counsel and guidance **was** given to the Motorcycle Accident Research Teem throughout the research operation. The combination of the broad qualification plus specialized motorcycle experience of the proposed research teem and the expert guidance of the advisory **committee** guaranteed that the research results would be of high quality.

3.2 Project Schedule

The major activities of this research took place in the following schedule:

July 1975 through December 1975: Staffing, Development of the data system, Establishment of field cooperative agreements, Team training and practice operations.

January 1976 through December 1977: Accident data collection, Teem retraining, preliminary data quality control, Field cooperative activities, refining of notification system.

January 1978 through December 1979: Accident data case review and quality control, Data editing, Data analysis and review.

July 1976 through December 1976: Development of exposure data system.

July 1978 through March 1980: Exposure data collection, Exposure data editing, Data analysis and review.

January 1979 through December 1979: Script and production development of helmet effectiveness film, On-scene and studio filming, Film editing.

January 1980 through September 1980: Accident and exposure data compilation, Final analysis and review, Final report preparation.

Three other reports of these activities were prepared and submitted: (i) Phase I Report - January 1976, (ii) Status Report of Accident Data - January 1979, (iii) Motorcycle Safety - Helmet Effectiveness, a film presentation of Status Report findings relating to motorcycle safety helmets. DOT 9-001.

3.3 Project Personnel

The project personnel were as follows: Principal Investigator: H. H. Hurt, Jr., Research Associate: J. V. **Ouellet**, Motorcycle Specialist: D. R. Thorn, Project Manager: S. L. **Browne**, Administrative Coordinator: S. J. Bakerink, Research Assistants: V. **W.** Owens, R. A. Pollack, W. D. **Kutz**, J. D. Hurt, E. D. **Lougee**, J. A. Bakerink, G. J. Graham, L. **Slycord**, L. D. Rudy, T. Y. **Tamura**, C. J. **Dupont**, C. C. Howard. T. J. Fain, L. J. McKenzie, and J. **Engleman**, Programmer Analysts: R. **Chang**, M. L. Hanson. Secretarial Staff: R. **Lucero**, S. **DeShong**, D. C. Davidson, Principal Consultant: J. S. **McKibben**, Medical Consultant: H. S. **McMurria**, M.D., Helmet Technology Consultant: J. A. Newman, Ph.D., Data Consultant: G. A. Fleischer, Ph.D.

In addition, the personnel of the Air Force Audio Visual Services Center at Norton Air Force Base produced the videotape film on Motorcycle Safety-Helmet Effectiveness. Lynn W. Hippleheuser was the producer and Bob **Mack** was head of the writers staff.

3.4 Data Collection Plan

Accident Data Collection

A detailed plan for sampling of accidents was prepared and submitted with the Phase I report. During the early parts of accident data collection activity it was clear that such detailed strategic plans could not be followed; the accident cases collected were limited by the availability of **timely** accident notifications and resources of the research project.

During the two years of accident data **collection**, approximately 4500 motorcycle accidents were recorded by traffic accident reports in the study area. Timely notification was received by the research team for approximately **one-half** of these accidents. The research team **was** able to respond to and initiate on-scene, in-depth investigation on 1126 of these notifications, of which 900 could be completed satisfactorily for data purposes. In other words, only 20% of the recorded accident population could be sampled for the detailed **on-scene**, in-depth accident data collection. In view of the basic resources of this research project, and the relatively large volume of accidents in the

study area, this 20% sampling is considered to be the upper limit attainable for such research data collection activities.

Two factors limited the acquisition of accident data for the detailed **on-scene**, in-depth investigation. First, more resources and more personnel could **have** been employed to respond to notifications but this would have increased **costs**. Some **cases were** declined when the research staff **was** saturated with other cases. but this **is** actually a rare problem, involving less than 6% of the notifications received. The second factor limiting accident acquisitions **is** the performance of the notification system. The principal difficulty is the priority of actions by emergency services; law enforcement control of the accident scene and medical care for the injured must take place without interference or interruption. In this way, accident research activities must operate completely at the periphery of emergency services and accept whatever communication of notification **may** be available without conflict. **Many** different approaches were tried to improve the accident notification system to increase timeliness and thoroughness of accident event detection, and the limits were constantly strained. Maintenance of the notification system **was** the dominant effort, improvement could not be made to increase acquisition beyond 20%.

With the limitations of accident notification and project resources, the acquisition of accident cases for on-scene, in-depth investigation **is** considered to be **limited** simply by available accidents. In this **way**, the accident data is considered to be without bias and **may** be peculiar only to the study area.

Collection **of** traffic accident **reports** within the study area **is** not difficult because of the special cooperation of the Los Angeles Police Department and the offices of the California Highway Patrol. **However**, the collection **is** tedious and required much telephone communication, travel and time. The 3600 police traffic **accident** reports **were** collected, **analyzed** and processed without significant difficulty or delay.

Exposure Data Collection

The original plan for collection of exposure data had expectation of returning to the site of each of the 900 on-scene, in-depth accident investigations at the same-day-of-week **and** time-of-day **as** soon **as** possible after the accident. Procurement delays and reductions of funds available required alteration of this original plan in calendar time and number of data collection sites.

The changes required that the number of sites for exposure data collection be reduced to 500, and that the exposure data be collected approximately two years later. Five hundred accident **cases** were selected from random groups so that the monthly distribution approximated the accident distribution, e.g., 6.5% of the OSIDI **cases** were collected in **March** so 6.5% of the exposure sites were selected from the **March** OSIDI accident sites. Locations with significant environmental changes were omitted. In addition, selected benchmark exposure data were collected during the times of accident data collection, when the delays of detailed exposure data collection were confirmed. Specific data **were** collected on helmet and headlamp use.

Actually, exposure data collection **is** conducted for 505 locations, and data were obtained for 2310 motorcycles and riders.

4.0 RESEARCH METHODOLOGY

4.1 Liaison and Cooperative Agreements

The acquisition of all the necessary accident data is a complex task requiring extensive interaction with a large number of agencies and groups. Basically, there were five critical requirements for the acquisition of accident information:

1. The team must receive notification of an accident at the time the accident occurs, with reliable identification of motorcycle involvement.
2. Once on scene, the data collection team must gain access to accident involved parties and vehicles. Such access is the responsibility of the investigating police officer, whose full cooperation was vital.
3. Follow-up of on-scene accidents, and the encoding of data from 3600 police reports required acquisition of police reports in a consistent, reliable and timely manner.
4. Acquisition of injury data required the cooperation of emergency treatment facilities, hospitals, group and private physicians and the Coroner's office.
5. A thorough examination of the accident-involved helmet necessitated bringing the helmet to the office for disassembly and analysis. It **was thus** critical to find a **way** to persuade a rider **to** donate his safety helmet.

Notification

Because of the size and complexity of the radio **communications** systems of the City of Los Angeles Police Department (**LAPD**) and California Highway Patrol (**CHP**), and the relatively low proportion of accident notifications occurring on these frequencies **was** ruled out. However, the City of Los Angeles Fire Department (**LAFD**) dispatches rescue ambulances to locations throughout the entire 470 square mile study **area** over three different radio frequencies. Most of the accident notifications to USC were obtained by monitoring these frequencies. A **formal** cooperative working agreement **was** established with the Los Angeles Fire Department, in which notifications of motorcycle accidents were broadcast, including the location and time of the accident. Further, intensive efforts were made to contact all rescue ambulance personnel on a face-to-face basis in order to explain the research effort. These efforts resulted in an increased notification rate, as ambulance personnel often reported back previously undetermined motorcycle involvement in the accident to the dispatcher, who then notified USC.

A second source of accident notifications was established with the "complaint **board**" of LAPD. Communications officers receiving telephonic notification of a motorcycle accident from a citizen would first forward the information to the radio dispatcher and then call to notify the research team.

Normally, radio and telephone communications were monitored constantly by project personnel. However, when the teams were in the field, or off duty, telephone communications were recorded with automatic recording equipment; radio communications

were recorded on tape with a carrier-activated monitor. Thus, notifications that occurred while the team was not on call were recorded and then followed up if the accident met sampling requirements.

Notification of fatal accidents was usually by means of telephone communication with the Coroner's office every morning, to determine whether any acquirable accidents had occurred. A number of fatalities were acquired through the other communication channels, i.e., LAPD, LAFD and CHP.

Despite the variety of notification sources, the team was notified in time to respond to approximately one-fourth of the reported accidents occurring in the study area. Even this level of notification required conscientious attention to maintaining frequent interaction with the individuals manning radio and telephone communication sources.

On-Scene Access

The cooperative agreements with Los Angeles Police Department and California Highway Patrol provided official approval from headquarters for USC investigators to examine accident-involved vehicles and scenes. While this was still subject to the discretion of the investigating officer on scene, not a single case occurred in which the research team was denied access. In many instances, officers assisted team personnel by introducing investigators to accident-involved parties and assuring them of the research nature of the investigation, or by escorting USC personnel into hospital emergency rooms for interviews and medical information.

A critical part of the accident investigation activities was to gain access to tow yards and impound facilities where the accident-involved vehicles - usually the motorcycles - were often taken. In most cases, these were Official Police Garages (OPGs) working under contract with the police department. Establishment of the official cooperative agreements with the Los Angeles Police Department and California Highway Patrol effectively opened the OPGs to USC personnel.

Acquisition of Accident Reports

Following establishment of the cooperative agreements with the Los Angeles Police Department and the California Highway Patrol, the flow of accident reports from their initiation at the accident scene to their final record storage was studied, and key points for extracting reports from the system were identified. This allowed rapid acquisition of traffic accident reports (TARs) for follow-up of in-depth investigations. Those TARs that were not needed for accident follow-up and were not extracted early in the flow were generally allowed to proceed to record storage. The individual California Highway Patrol offices held all motorcycle accident reports for regular pick up. Los Angeles Police Department reports that were not extracted from the system initially were acquired utilizing computer identification of motorcycle-involved accidents. This assured acquisition of all reports of motorcycle accidents for tabulation in the 3600 cases.

Injury Data

Injury data was acquired from a variety of sources. In many cases, if the accident was minor and involved only superficial injuries to the rider, and the rider expressed no intention of seeing a physician, the injury information was

taken by the on-scene investigators. Whenever possible, this was followed up with a phone call some time later to determine whether additional injuries had been discovered after leaving the accident scene.

When the injured rider or passenger was transported to a hospital emergency room, every effort was made to visit the emergency room to speak to **the** injured rider and acquire initial injury data. This was of great value, since tell-tale abrasions and skin injuries that can help define rider kinematics are often lumped together in emergency room reports as "multiple abrasions and contusions **to** the body." **Whenever** possible, diagnostic tests such as X-rays were examined and documented by notes or photography. Riders who were treated by physicians were usually followed up by one of two resident pathologists who worked as consultants to the project. The pathology consultants contacted the treating physician, hospital **personnel**, or the injured riders, to verify the nature and location of the injuries.

Injury information in the fatal cases came, of course, from the Coroner's office. Completed autopsy protocols were obtained from the Coroner's office in all **fatal** accidents, and this was sometimes augmented by attendance of project personnel at the **post-mortem**.

Helmet Acquisition

In order to obtain the rider's helmet for thorough examination and evaluation after an accident, an agreement was made with the Safety Helmet Council of America (**SHCA**) for the member companies to donate a new helmet of equal or superior quality to the rider who would **donate** his "lucky" helmet to the USC Motorcycle Accident Research Project. Although **many** riders initially wished to keep their **accident-**involved helmet for display on the mantel at home, the offer of a brand new helmet in trade was crucial in their decision to donate the old helmet to research. In this way 73.4% of the helmets involved in accidents were brought to the office for thorough examination, then **most** were retained for further study.

The cooperation of all these public and private agencies was assured by the activities of the research teams in providing equivalent support to the cooperating agencies. For **example**, guest lectures were given at local high schools at the request of Los Angeles Police **Department** and California Highway Patrol, training sessions in skid mark analysis and speed estimation were conducted for LAPD, **CHP** and Los Angeles Sheriff's Office, training sessions in helmet technology were given for LAPD and CHP, seminars were conducted for Safety Helmet Council of America membership on research findings, and technical assistance was given to LAPD and CHP in accident reconstruction of special cases. These activities were presumed necessary equivalent cooperative assistance.

4.2 Team Training

The first six months of the project were used to bring all the research personnel to a high level of familiarity with all the tasks and background knowledge that would be required to insure maximum quality in the collection of accident data. The full range of topics covered has been described in greater detail in the Phase I report of this study (Hurt, 1976), and is described more briefly here.

Team Field Relations

Because of the extensive interaction between the private and public agencies involved in various aspects of motorcycle accidents, a considerable amount of time **was** spent orienting the team members to the official requirements of the public agencies, the nuances of the specific ways in which the agencies perform their jobs and basic "etiquette" for accomplishing research goals while causing minimum disruption of the normal work of those persons working in cooperating agencies.

Part of the basic orientation was accomplished through lecture and field work with members of a" on-going automobile accident research team also working in the USC Traffic Safety Center. This included on-scene investigation of accidents, visits to tow yards, emergency rooms, etc.

Team personnel also visited the Los Angeles Police Department and the Los Angeles Fire Department communications centers to watch the specific flow of notification data and **to** familiarize communications personnel with the team notification requirements. Similar visits to tow yards were made to ensure future ease of access to accident-involved motorcycles and cars to familiarize team members with legal requirements of tow yards. As part of the training, team members rode along with California Highway Patrol and Los Angeles Police Department officers on routine patrol.

Accident Investigation Methodology

Of course, 'scientific investigation of motorcycle accidents requires a thorough familiarity with the elements of accident investigation methods - general methods as well as those peculiar **to** single track vehicles such as motorcycles. All the team members were trained, in both lecture and practice, in the basics of accident investigation. Some of the topics included interviewing and evaluation **of** witness statements, collection and analysis of environmental data, analysis of vehicle damage, injury causation, photography and photographic **documentaion** of evidence, collision dynamics, and the reconstruction of collision events from physical evidence.

Essentially, the training sequence progressed from lecture to demonstration to practice by the team members with critique and feedback from instruction personnel and other team members. Part of the training included a" entire day at a test facility evaluating skids made under **a** wide variety of conditions of different motorcycles.

Vehicle Systems

The major components of the motorcycle were reviewed: tires and wheels, braking systems, electrical systems, suspension, fuel delivery and exhaust systems, drive train and so on. Special emphasis was placed on failure and defect analysis, failure modes and the evaluation of evidence that might suggest some type of vehicular defect or failure. Training also focused on the determination of fuel and ignition sources in fires and the differentiation of collision damage from problems present in the motorcycle prior to the collision.

Vehicle Dynamics

Because of the peculiar handling characteristics of single track vehicles such as motorcycles, mopeds, and bicycles (e.g. see Hurt, 1973) it **was** essential that team personnel have a formal understanding of motorcycle dynamics and the factors that influence those dynamics. Those were accomplished largely through lecture and review of case histories. Topics included: turning, acceleration and braking, instability modes such as slide-out, wobble, weave, high-side, and capsize, the effects of motorcycle modifications, maintenance, tires, passenger involvement, etc., as well as the detection and evaluation of evidence indicative of instability problems.

Injury Mechanics

Injury mechanics training **was** largely through lecture methods. To a large extent, prior **biomechanics** research in automobile and aviation accident investigation provided much of the background information on injury mechanisms. **However**, much of the application of this information to motorcycle accidents came simply through extensive experience of relating the collision dynamics to vehicle damages and rider kinematics in practice accident investigations during the latter part of the training period.

Helmet Technology

Team training included a thorough familiarization with helmet function, design and manufacture. Team research personnel visited the manufacturing and test facilities of a number of major helmet manufacturers in the Los Angeles area to learn details of helmet construction methods, consult with design and test personnel on the performance characteristics of various materials and designs and to see helmets tested in accordance with the various standards.

Data Forms

Of course, every accident is a unique combination of factors, and while there **may** be many points of similarity between two accidents, each still has critical differences. Obviously, one could simply write a narrative description of each case, but the usefulness of a narrative for retrieval of information and statistical analysis is very limited. The requirement that the accident information be retrievable and amenable to statistical analysis dictated the use of a computerized data system.

Many of the factors incorporated in the data forms were simple "identification" type factors which required the investigator to identify characteristics of the environment, the motorcycle, other vehicle, rider, helmet, etc. To a certain extent these tended to be factors existing prior to the collision.

However, many of the unique aspects of accidents involved the combination of relative pre-crash positions, pre-crash motions, evasive actions, collision dynamics, rider kinematics and injuries, and helmet damage. The data forms had to satisfy the conflicting requirements to provide enough detail to define the **major** accident factors, yet **not** define so many detailed **factors** as to lose sight of **the general** characteristics of the accident. In **other** words, the data **forms** had to provide enough detail, but not too much.

The development of the data forms took place during the training period that preceded the collection of on-scene, in-depth accident data. Many of the factors selected for investigation were drawn from the research proposal. A given factor was selected, various possible responses were then identified and put into mutually exclusive multiple-choice categories. Somatic injuries were encoded using the Occupant Injury Classification (Marsh, 1973).

Because of the particular interest in head and neck injuries in motorcycle accidents, anew data form was developed to encode head and neck injuries with a higher degree of accuracy. The Head and Neck Injury form was based on the existing Occupant Injury Classification. Six elements defined each injury; the first three elements were locators which identified the location of the injury. "Region" was usually defined in terms of the nearest major bony structure. However, because some injuries might overlap a number of specific bones, more general locators such as "face", "cervical" (neck), and "brain" were included. The second and third locators identified the side of the body and the aspect (anterior, posterior, medial, etc.) on which the injury occurred. The fourth factor identified the injury type; the fifth identified the system or organ or region involved. The sixth factor assigned an injury severity score which was taken from the Abbreviated Injury Scale (American Association for Automotive Medicine, 1976). Side, aspect and injury-type codings were taken directly from the Occupant Injury Classification. This system proved to be quite flexible in encoding a wide range of head injuries. Of course, some detail is lost. The system does not allow the separate specification of say, sternomastoid muscle injuries from sternohyoid muscle injuries in the anterior neck, or to distinguish lesions of the midbrain raphe nuclei from those of the locus coeruleus. However, such distinctions are not critical for the present research purposes: muscle injuries do not represent a threat to life, and brain injuries tend to be rather diffuse and not restricted to a single cyto-architectonic region.

When the data forms had been developed they were utilized for practice accident investigation activities in exactly the same way they would be used for the collection of the research data. This allowed team members to modify the forms to accommodate unanticipated accident characteristics and to develop uniform inter-coder practices.

Practice Team Operations

The training period culminated in the collection of approximately fifty on-scene, in-depth accident investigations purely for purposes of practice at the data collection and evaluation methods that had been learned or developed during the training period. This also served to refine the data forms that would be used for coding accident information during the data collection phase.

Exposure Task

The collection of motorcycle exposure data did not entail a formal training period for the personnel involved in the on-scene exposure data collection. The primary reason was that in the majority of exposure cases, at least one of the data collectors was also experienced in the collection of on-scene, in-depth accident data. Because the exposure data questions were virtually identical to the accident data questions, and the same logic of responses applied to both, the tasks were highly similar and there was a very high level of transfer from one task to another.

Training of personnel who did not have experience in accident data collection was by explanation and demonstration of the accident data collectors. Further, accident investigation personnel were always available for consultation in complex issues and performed a large part of the exposure data quality control.

4.3 Sampling Plan

Details of the original sampling plan are available in the Phase I Report (Hurt, 1976). Essentially, the sampling plan called for the following:

1. The collection of 3600 traffic accident reports from the Los Angeles Police Department and California Highway Patrol and the encoding of the information on the reports. The sampling period **was** defined as January, 1976 through July, 1977 (when it was estimated the 3600 goal would be achieved). This plan would simply sample **all** reported accidents occurring in the study area.

2. The on-scene, in-depth investigation of 900 motorcycle accidents in the same time period. Accidents were to be collected according to a sampling plan detailed in the Phase I Report.

3. The exposure data were to be collected on the same day of the week, **same** time of day, under similar weather conditions one week after the accident occurred. There were to be 900 exposure sites, one for each accident investigated in depth by the team. This was later modified to 505 sites.

Police Reports

The data from the 3600 traffic accident reports were collected in accordance with the plan outlined in the Phase I Report. Accident research personnel stopped regularly at California Highway Patrol offices, where all motorcycle accident reports were held for pickup. A similar method of picking up reports from the various divisions of the Los Angeles Police Department also was used. Additionally, the computerized accident reporting system of the City of Los Angeles allowed the identification of **all** traffic accident reports involving a motorcycle. A computer print-out **showing the** location and report number of all motorcycle accidents was obtained on a semi-annual basis. This was crosschecked against reports already collected by the team and any missing reports were obtained from the Records Division of the Los Angeles Police Department.

Accident Data

The collection of on-scene, in-depth (**OSID**) data took place during the entire 1976 and 1977 calendar years. Approximately 1100 investigations were initiated and 900 of these were completed. In practice, the notification system, even at maximum effectiveness, provided notification of only about one-fourth of the recorded accidents, and this level of notification required more than six months to achieve. This dearth of notifications precluded the sampling of accidents to meet any pre-determined sampling system; virtually all radio and telephone notifications of accidents were investigated and completed. The only limitation presented **was** saturation of team capability. The collection of accidents after notification allowed **the** team to collect accidents occurring during the hours when the team was

not on duty. The difficulty in immediate notifications also required the extension of the data collection period from August, 1977 to December, 1977 in order to acquire the full 900 accident cases for completion of data requirements.

Exposure Data

As a result of delays in procurement and funding, the collection of exposure data was modified in **two** ways: 1) rather than being collected as soon as possible after the accident, the exposure data were collected from June, 1978 through June, 1979, and 2) data was collected at 505 accident sites, rather than all 900 accident sites. Exposure **sites** were selected from the accident sites on a random basis.

In the collection of rider and motorcycle information at each exposure scene, the sampling plan was simply to photograph all motorcycles and riders and, if the traffic flow and roadway permitted **stopping** riders for interviews, team personnel attempted to attract and interview every passing motorcycle rider. Of course, some exposure sites, such as freeways and major **arterials** without curbside parking, did not lend themselves to interviewing, and many riders simply refused to stop or gave only limited information about themselves.

4.4 Field Data Collection Activities

Whenever notification of an accident was received, the team responded immediately to the scene of the accident in conspicuously marked research vehicles. On arrival at the scene, contact was immediately made with the investigating officer to gain access to the accident scene. The highest priority was given to collection of perishable data: The involved car was photographed to define the collision damage including motorcycle and rider impact areas, the car driver was interviewed, the environmental evidence was photographed and later **diagrammed**. The motorcycle was examined and photographed. Information **about the** motorcycle that could not be determined from photographs, such as brake adjustment, tire pressure, etc., was determined and recorded on scene.

Environmental Evidence

Evaluation of the environmental factors began with the location and careful examination of the motorcycle and other vehicle precrash paths of travel. This allowed evaluation of the roadway for view obstructions, pavement irregularities, precrash lines-of-sight, conspicuous marks of precrash evasive actions, solar glare, etc. Following this evaluation, photographs were taken along the precrash paths of travel (insofar as traffic conditions allowed) to document the findings. Diagrams of the accident scene were drawn to show the pertinent evidence and define distances. Finally, environmental data forms were completed at the scene or later during office review of scene photographs.

Vehicle Evidence

Because automobiles involved in a collision with a motorcycle were usually driveable, the driver of the other vehicle usually left the scene soon after the accident. The other vehicle was usually the first item photographed by the team personnel at accident scenes. Evaluation of the automobile was restricted to the photography of accident damage in instances where drivers were unwilling to be

interviewed. In follow-up investigations, the automobile had to be located then examined and photographed. In some instances, repairs had already started, so the damaged parts **were** located, examined, and photographed.

Examination **of** the motorcycle was **most** often completed at the scene of the accident. **When** this was not possible, the motorcycle was examined wherever it was available, e.g., a tow yard, impound lot, rider home, or a repair shop. The motorcycle was photographed and measured and information about it was recorded on the **pre-coded** data forms: identifying information such as manufacturer, type, year, size, etc., modifications, tire and wheel types and conditions, condition of maintenance, collision damage (as separate from general wear-and-tear and previous accidents). If a fire was involved, the fuel and ignition sources were determined and recorded. Tires were evaluated for scuffs and skid patches to identify evidence of braking and loss of control mode, for violation of tire or tube integrity, for debris trapped between tire and rim, for inflation pressures or tire wear contributing to loss of control. etc. In some instances, second and third follow-up **examinations** were necessary in order to resolve some critical question.

Human Factors - Interviewing

On-scene activity involved interviewing of the rider and passenger and other vehicle driver if they were available for interview. Witness interviews were often utilized to help establish the points of rest of the accident-involved vehicles and parties if such information could not be determined from physical evidence alone. Eyewitnesses to the accident were interviewed; their statements often guided the search for corroborating physical evidence. Of **course**, when physical evidence conflicted with witness statements, the witness statements were given less significance in favor of the physical evidence. For example, witnesses almost always overestimated motorcycle speeds, usually by 30% to 50%, and other vehicles **drivers** often improperly identified the precrash location of the motorcycle. or said it "came out of nowhere."

Motorcycle riders were usually interviewed shortly after the accident either at the scene or at the hospital. In fatal cases or those involving severe head injury, interviews were conducted with a family member, friend, riding partner, coworker or some other person who could provide authoritative information about the injured party. Riders who were seriously injured and unable to participate in an interview in the emergency room were usually interviewed later during their hospitalization. Of course, some riders managed to elude the research team.

Because much of the rider's background information was unverifiable except on the rider's word, interviewers were careful to cross-check information given in one answer by asking other similar questions, or asking for clarification. For example, a rider might say he had been riding motorcycles for ten years. **More** careful questioning, however, might reveal that two **or** three years of his experience, involved sporadic riding on borrowed motorcycles and another year of no riding at all. Obviously, these periods differ substantially from periods of **owning** and operating one's own **motorcycles**; as such they would not be counted as riding experience. Similarly, many riders who claimed to have dirt bike experience had only occasional dirt riding experience on borrowed motorcycles.

Rider statements about precrash and crash events, and evasive actions received the same careful scrutiny and cross-checking with physical evidence that other vehicle driver and witness statements received. For example, rider statements about their precrash evasive maneuvers seemed to reflect either their intended evasive action or some sort of wishful thinking; there was a low correspondence between rider statements and physical evidence indicating what evasive action had actually been taken (or, quite often not taken). Similarly, they often invented potholes, and sand or gas or oil spills on the roadway, and stuck throttles, to account for a fall to the pavement caused by their own lack of skill or some unsafe act. The explanations given by the riders were not really deliberate deception; rather, they represent the rider's efforts to reconstruct and make sense of a painful and bewildering experience.

Photography

Photography was the principal means of documenting evidence from the accidents. Equipment used were Canon FT and **Nikkormat 35mm** single lens reflex cameras equipped with standard **50mm** f1.8 lenses (one **Nikkormat** had an **85mm** f3.5 **macrolens**). Flash units were used not only in night photography but also for daylight flash-fill photography, in order to reduce the darkness of shadows cast by the sun on the motorcycle.

Photography of the accident scene demanded a series of photos along the motorcycle path of travel in order to document the roadway conditions — general environmental conditions as well as specific characteristics of the roadway as they appeared to the rider in the immediate pre-crash moments. Photos along the motorcycle path of travel also allowed the accurate documentation of skids and scrapes that helped define the pre-crash evasive actions or loss of control **mode** of the motorcycle. and the point of impact. If a vehicle involved in collision with the motorcycle left any skids these were similarly documented. Photos along the other vehicle pre-crash path of travel helped evaluate environmental conditions experienced by the car driver and the pre-crash conspicuity of the motorcycle (by showing the background against which the rider would have been seen).

Photography of the motorcycle involved overall shots of the standing motorcycle with eight views around the motorcycle: right, left, front, rear, **right-** and left-front, right- and left-rear. While numerous views created some redundancy of observation, it was not **uncommon** for one view to show some critical item that might not be apparent in another view. For example, bending of the **rear** shock by the rider's leg being trapped between the rear shock absorber and a car bumper might show up in a full right side view, but not a right-rear view. The eight documentary photographs were shot from about tank level and provided the elementary vehicle data for the motorcycle. Close-up photos were used sparingly to document specific critical data elements such as headlamp filament condition (indicating headlamp function at the instant of impact), tire striations indicative of braking, loss of control, etc., and hair, skin or cloth marks indicating rides contact; vehicle defects related to accident causation were also documented.

Photographs of the accident-involved automobile typically documented only the areas of the car sustaining impact either with the rider or the motorcycle. Close-up photos were usually unnecessary, although in some instances they were

used to illustrate critical data elements. For example, a pattern of motorcycle front tire striation on a car door might indicate use or "on-use of the front brake: nearly horizontal scuffs in broadside impacts show a predominance of car motion but little tire motion, indicating that the tire had nearly stopped rolling as a result of braking at the moment of impact.

Helmet Analysis

Of course, the analysis of damage to the accident-involved helmet was a critical part of the accident investigation. Some elements of the analysis were straightforward: identification of the manufacturer, date of manufacture, standard certifications, construction materials, helmet type, retention system type, etc.

In many instances the objects struck by the helmet were easy to identify: pavement, tires, glass, and painted metal have characteristic patterns of marking the helmet shell. In other cases identifying a pattern of damage, or establishing a chronology of impacts was quite difficult. For example, a faint linear dent on a polycarbonate shell can be overlooked easily, or mistaken for light gouge; but if caused by direct pressure perpendicular to the shell, it represents an enormous crushing load. Similarly, abrasion damage to the edge bead of the helmet is common, and usually of no great significance, but slight discoloration and deformation can indicate severe impact forces. When the helmet strikes a soft compliant surface such as a car door, the impact load can be spread diffusely by the deformation of the sheet metal: hence crushing of the foam liner material of the helmet might be focally minimal but spread over a very wide area. In all instances, the analysis of helmet damage required detailed examination, identification of the impacting surface and the nature of the impact and the careful synthesis of the data.

When helmet ejection occurred, the analysis required determination of whether the helmet had been fastened before the accident and, if so, the retention system failure mode and the time in the collision sequence when the helmet came off. Details of the analysis of damage to accident-involved safety helmets are available elsewhere (Hurt, Ouellet, and Wagar, 1976; Ouellet, 1979).

Exposure Data

Exposure data were collected at the scenes of previously worked accidents, on the same day of the week, same time of day, and similar weather conditions. Exposure teams arrived at the exposure site an hour before the accident time of the reference accident case. In the ensuing half hour the appropriate traffic flows to be counted were identified and verified. camera equipment prepared, and signs to attract passing motorcycle riders were placed alongside the roadway upstream from the exposure site. The signs were 2½ ft x 3 ft white reflectorized sheet metal, with four inch black letters; the three signs read, in order, "Motorcycles Stop Ahead," "Motorcycle Safety Survey," and "Motorcycles Stop Here."

The gathering of exposure data began one half hour before the reference accident time and concluded one hour later. For example, if the reference accident occurred at 12:30, exposure data were collected from 12:00 to 1:00. Traffic flow was tabulated using manually operated tally counters mounted on a board. One cluster of counters was used to count traffic of the other vehicle path of travel (if there were another vehicle path separate from the motorcycle path of

travel). Each cluster contained one counter for each major category of vehicles: full and intermediate size cars, compact cars, sub-compact cars, pickups and trucks, large trucks and buses, and others.

Ordinarily, one data collector counted traffic while the other was responsible for photographing all the passing motorcycles and interviewing the riders. Whenever possible, two photos were taken of the motorcycle that failed to stop for interview: a front-side view that permitted identification of the major characteristics of the motorcycle and headlamp function and rider apparel; plus a rear view that would permit identification of the license plate so that the registered owner could be identified then contacted later by mail.

On-scene interviews were conducted with those riders who stopped. The questions were essentially identical to those asked in the accident study and the same methods of cross-verifying answers were used. The interviews were prefaced by an explanation of the purpose of the research, an offer of anonymity and privilege to the rider, and an explanation of the questions to be asked. During this initial phase of the interview, research personnel attempted to establish a rapport with interviewees and put them at their ease.

Some riders who did not stop for interview were identified by means of the motorcycle license plate. A questionnaire soliciting the same information taken in an interview was mailed to the home address of the registered owner. Questions were in an open-ended form. The questionnaires returned to the team were then reviewed and the data encoded as in roadside interviews.

Accident Reconstruction

The field collection of data was the critical first element in the research effort. The second task in each accident was the analysis of the evidence and synthesis of all the available information to reconstruct the sequence of collision events, speeds, collision dynamics, rider kinematics and injury mechanics, to determine the effect of motorcycle modifications, conspicuity, helmet function and its relation to head injury, etc. Essentially, every accident was a jigsaw puzzle, with a thousand or so data elements, that fit together in only one way; and while there were similarities among accidents, each case was unique. The task facing the investigator was to identify the critical data items and determine the interrelation of these elements and develop a coherent mental picture that related all elements that define exactly how the accident occurred.

At the start of reconstruction, the investigator has collected information including a police report, medical report, twenty or so photos of the accident scene and vehicles, a diagram of skids and other environmental information, and partially completed data forms that define some of the environmental, vehicle and human factors in the accident. The analysis of the accident proceeds then from the selection of those critical factors necessary to resolve a particular question that cannot be resolved by direct observation.

For example, speed analysis was sometimes a simple, and other times a very complex task. Suppose a motorcycle rider overbrakes for a turn, slides out, falls and slides to a stop on the pavement without hitting any other objects. Here, the determination of crash speed is based simply on the coefficient of friction

of the motorcycle sliding on pavement, the distance the motorcycle slid, and the elevation of the roadway. The initial speeds are estimated by use of conventional computations based on uniformly decelerated motion.

In some cases, multiple estimates of speed are available to confirm the results to the accident reconstruction. For example, if a motorcycle rider runs wide on an elevated **curve** such as a freeway overpass and falls to the ground below while his motorcycle slides to a stop on the roadway. the speed of the motorcycle can be calculated as above. The speed **can** also be calculated by measuring the horizontal distance travelled during the fall divided by the time required to fall.

Motorcycle and automobile collisions were much more complicated. A common measure of impact speed is deformation of front suspension of the motorcycle. **However**, the experiments that defined motorcycle deformation as a function of motorcycle crash speed utilized only stationary automobiles being struck by moving motorcycles in perpendicular impacts. In relating such information to a real accident, the investigator must take into account the angle of impact, relative speeds of the *vehicles*, *vector* components of the speeds, modifications of the front forks, braking performance, etc.

Similarly, the analysis of injuries required the determination of the exact manner in which the collision occurred, the relative motions of the vehicle(s) in the instants of impact, and determination of those objects the rider struck. When the rider was thrown from the point of impact, it was necessary to define those injuries that occurred as a result of **initial** impact **with a car**, and those that resulted from tumbling in the roadway, and perhaps impacting other objects. The analysis of injuries required familiarity with the typical mechanisms of injury that had been discovered in automobile accident investigation and the patterns of injury peculiar to **motorcycles**, e.g., groin injuries and lower leg fractures.

Determination of loss of control modes was based largely on the pattern of environmental evidence and damage to the motorcycle. For example, the typical locked rear wheel slide-out involves a **skidmark** that starts rather straight and narrow, gradually broadens as it curves to one side and becomes faint and disappears. As the skid disappears, it is accompanied in parallel by scrape marks as the side of the **motorcycle** contacts the pavement. The motorcycle typically shows a pattern of damage in which the rear tire shows striations and scuffing on the same side on which the motorcycle fell, sliding damage to the rear and side structures of the motorcycle, and turn signals bent in the direction of the fall.

By contrast, the front braking slide-out is indicated by a very wide and heavy skid mark usually ten to fifteen feet long, which hooks off to one side. Like a rear slide out, the front braking slide-out has a region in which the skid mark is overlapped and paralleled by **scrape** marks from the side of the motorcycle. The motorcycle front tire shows striations and scuffs, the front turn signals and headlamp are bent and abraded and the abrasions often are horizontal when the motorcycle is examined standing up (because there is usually less yawing of the motorcycle in front-lock slide-outs than in rear lock slide-outs).

On the other hand, rear slide-out loss of control sometimes ends in a high-side when the motorcycle rider releases the rear brake as the motorcycle is starting to slide out and fall. This allows the rear wheel to start rolling again, thereby gaining traction and throwing the motorcycle to an upright position and beyond so that it falls on the "high" side. The critical environmental information that defines a "high side" is a gap of several feet between the end of the skid and the start of the scrapes. The motorcycle will show a skid patch and scuff marks on one side of the tire but pavement damage to the engine, muffler, pegs etc. on the opposite side. Thus the field collection of the data required the judgement and skill to recognize critical items such as the overlap of skids and scrapes, while reconstruction required the interpretation of small clues that pinpointed the collision conditions.

The preceding discussion is not intended to provide an exhaustive description of the process of accident reconstruction; rather, it is intended to illuminate the variety of factors considered and some of the logic in the reconstruction of motorcycle accidents. A more thorough discussion of some of the factors involved is available elsewhere (Hurt, 1973; Ouellet, 1979).

4.5 Quality Control

The investigation and reconstruction of each accident required the determination of 582 questions involving 1045 data entries (human factors alone required 658 data entries). These ranged from simple identification factors, such as roadway type or motorcycle manufacturer, to highly complex issues such as injury contact surfaces, speed analysis, and the relation between helmet use and head injuries.

The large amount of data collected and the complexity of the effort required a high level of quality control to assure the validity and reliability of the data. Quality control procedures took place on virtually every level of the research effort including data collection and accident reconstruction, as well as editing of the data and statistical analysis. Rather than being a separate function performed in isolation from the other research tasks, quality control was a constant, ongoing process integrated into the research effort. Quite often, quality control findings in one level of the research led to the alteration of task performance on another level. For example, reconstruction of accidents to determine injury contact surfaces might reveal that the composition of photographs taken during data collection needed improvement to better illustrate the characteristics of the impact.

Data Collection

Quality control took place in the data collection effort in a number of ways. In gathering rider background information, responses given by the rider were often cross-checked against other responses, or clarification was sought. For example, a rider might say that he had been attending to traffic on the roadway in front of him in the precrash phase of the accident, yet be unable to explain how the car he struck went from being at the side of the roadway to being directly in his path without his having seen it move until too late. Similarly, a rider might say he rides "every day" and under closer questioning state that he really commutes daily and rides only five days a week.

Injury information was often double or triple-checked. Information might **come** from the investigator's direct observations at the hospital, conversation with the injured party, emergency room reports, follow-up checks by the team **pathology** consultants or team personnel, autopsy reports and so on. In **many** cases, information **came** from **two** or three of these sources which **were** cross-checked against each other. Additionally, investigation of other aspects of the accident sometimes suggested injuries that were **not** immediately obvious. For example, some riders were reluctant to admit to having groin injuries, but when told that the motorcycle fuel tank showed damage characteristic of groin impact, they would usually concede to having suffered such an injury then provide other information about that injury.

Of course, interviews with accident-involved parties generated a variety of conflicting statements as to how the accident happened. As noted earlier, these statements were often used as a guide in searching for corroborating physical evidence, and in many cases led to the discovery of valuable physical evidence. Where physical evidence contradicted witness statement, the witness statement was discounted, and when no evidence could be found to support **or** contradict witness statements, the statements were evaluated in the larger context of the accident.

Motorcycle damage and environmental evidence show a correspondence in which damage and markings on the motorcycle caused by the environment should be identifiable within the environment and evidence in one should suggest evidence in the other. For example, in an accident in which the motorcycle ran wide on a turn, investigation of the environment may reveal tire scuffs along the curb. In order to verify that the scuffs came from the accident-involved motorcycle, **the** investigator would then look on the motorcycle tires and wheels for corresponding concrete abrasions that would confirm a low-angle tangential impact with the curb.

Quality Control in Reconstruction

In the early phases of the data collection, the reconstruction and review of the cases was performed jointly by all the investigators who had worked a **particular** accident. The debates occurring during such team reviews served to sharpen the reconstruction skills of the investigators and also allowed for development of standardization in resolving issues and encoding complicated information. During the later phases of data collection, reconstruction and review of the cases was typically performed by a single investigator with input from other investigators on the case as needed.

Many of the quality control procedures used in data collection were also used in the reconstruction and review of the cases. Since photographs were the **principal** means of documenting accident evidence, photographs were consulted extensively and cross-checked to verify evidence in the reconstruction of the accident for speeds, injury contact surfaces, collision kinematics and dynamics. **Followup** calls to accident-involved parties and witnesses were made as needed to clarify unresolved questions. In some cases, consultation was made with the treating physician to resolve questions concerning the rider's injuries, and in other **cases** outside physicians were consulted to help clarify complex issues relating to injuries.

Principal Investigator and Consultant Review

When team review and reconstruction of a case was complete the case was sent to the Principal Investigator for final review. Here, **many** of the same procedures used in reconstruction of the accident were utilized: evidence in photographs was **carefully** evaluated and cross-checked to verify precrash speeds and evasive actions, **injury** contact surfaces and collision dynamics. Data forms were checked for the internal consistency e.g., if the vehicle form stated **that the** front brake was being applied at the time of the accident, the human factors **form** should also indicate front brake usage as **an** evasive action. Review of all cases by the Principal Investigator also helped assure uniformity of coding practices.

Additionally, in a large number of cases, accident-involved parties were contacted by the Principal Investigator and interviewed a second time. This helped to verify information given in the original interview and allowed clarification of information contained in the field notes. Further, particular items of interest that arose in the course of the research **were** investigated on an informal basis. For example, many other vehicle drivers were surveyed to determine the extent of their familiarity and involvement with motorcycles, and a number of motorcycle riders were queried to determine the **conspicuity** characteristics of their upper torso coverage.

Quality Control in Data Processing

When quality control review by the Principal Investigator had been completed, the data were keypunched. Of course, any data identifying particular individuals, vehicles, accident locations etc. **was excluded** at this point to assure the inaccessibility of information regarding a particular accident. This was done to protect the anonymity of the accident-involved parties and the privileged research. In order to assure the reliability of the keypunch work, each case was keypunched then key verified. Any discrepancies that arose in data entries between the two sets of keypunch data were resolved by careful checking of the accident data forms to determine the proper entry.

When all cases had been keypunched and stored on tape, the next step of quality control was to take simple frequency counts of the responses to each question. Incorrect entries were then identified, checked against the case data form, the error resolved, and the data entry corrected. This process of generating the simple frequency counts, locating and correcting improper data entries, resolving the error and correcting the data entry was performed several times.

Finally, cross-tabulations of various data elements were made and unusual data entries were examined to determine the validity of the entry. Some entries required correction while other unusual entries simply reflected accident circumstances that were extraordinary in some way.

4.6 Data Processing and Analysis

Data collected in the study were encoded on the **precoded** field data forms. The data form usually contained a question about a particular item and a set of numbered multiple-choice responses. The investigator selected the appropriate response and entered the corresponding number in a box printed next to the question. When the case had been completed and all reconstruction and review by the team and Principal

Investigator "es finished, the data entries were transferred from the data forms to keypunch cards. Each case "es keypunched and key verified so that inconsistent entries were noted and resolved. When keypunch "as completed, the data "es transferred to magnetic disk for data **processing** and storage.

The data described in this report were stored es four independent sets:

1. 3600 Traffic accident report cases
2. 900 On-Scene, In-Depth accident cases
3. 505 exposure site data cases
4. 2310 motorcycle and rider exposure data cases

While the four sets were independent it "es possible to transfer data from one to another. For example, the 505 exposure **site data** forms did not specify the intersection type. **However**, since each exposure took place et the same scene as a previous on-scene, in-depth accident, it "es possible to transfer that data element from the reference accident case to the exposure data.

All file creation and manipulation programs were built using **Fortran** IV and the statistical analysis programs were built using the Statistical Package for the Social Sciences (**SPSS**). Since there were four independent data sets, four separate SPSS programs were built - one for each data set.

Additionally, the injury data from the 900 OSID cases were subdivided into two subsets: somatic injuries -defined roughly es anything below the neck -and head and neck injuries. Somatic injuries were encoded using the Occupant Injury Classification (**OIC**). Head and neck injuries were encoded using a system similar in form to the OIC but differing in the body part associated with a particular code. For example, in somatic injuries the body region designated "**P**" is the pelvis; and the head and neck injury form "**P**" signifies "**parietal**". Obviously, somatic injuries were encoded and analyzed completely independent of head and neck injuries, and vice versa.

Statistical analysis of the data "es largely through SPSS methodology. Simple frequency counts were **made** on all variables and, when the interaction of two factors "es the object of interest, a cross-tabulation of all the various responses "es generated. Specific questions required specific collection and cross-tabulations for analysis.

In many instances, a chi-square test might not show statistical significance within a large cross-tabulation since data were very often nominal as opposed to ordinal or interval in nature. Nevertheless, it **may** be highly significant in a non-statistical sense that, for example, one accident in twelve involved **under-**cornering and running wide on a turn while one in thirty involved overcornering and grounding out.

An important part of the data analysis involved determination of the nature and severity of the most severe injury. Each accident could have no injuries (in which case the most severe injury is "none" and the severity "0"), or there could be one or more injuries. Of course, a rider could have some injuries with the

same severity levels. For example, the rider might have six somatic injuries with the following severity scores: 1,1,3,1,2,3. The format followed in selecting the most severe was as follows:

1: Arrange all injuries in order of increasing severity. In the example above, this would be: 1,1,1,2,3,3.

2. Select the last injury on the list as the **most** severe injury.

When there is more than one injury at the highest severity level, as in the above example, the particular injury selected as "most severe" is somewhat arbitrary. **However**, it is precisely this arbitrariness that **assures** against selective bias in designating one injury (among two or more possibilities) as the "most severe".

Some of the data analyses involved collapsing data elements into smaller categories. For example, sge was tabulated on a year-by-year basis. But a **cross-**tabulation of, for example, helmet use by age is cumbersome and any trends within the data **may** be unclear until the 50 individual year categories are collapsed into several groups - in this example 0-16 years, 17-20, 21-26, 27-39, 40-49, 50-59, 60-97 years. When cumbersome data is treated in this manner, basic trends may be more readily apparent, and this type of treatment has been used in this report.

4.7 Research Recommendations

This research demanded a special qualification for the staff: It **was** mandatory that the research team members have extensive motorcycle experience in addition to the professional qualifications. It **was** vital **that** the research team members have the experience, perspective and sensitivity to the special problems of the motorcycle rider and the special characteristics of motorcycle accidents. It is sure that without this special ingredient, the factors critical to motorcycles would NOT have been collected with fidelity.

The comparisons of exposure data and registration data showed great differences. Actual motorcycle **use** differs greatly from registration information, e.g., many registered motorcycles are stored or are in garages and are not actually in use on the street by those licensed riders. **Also**, the use of traffic accident reports for motorcycle accident research must be limited. Only very basic information is available from such casual and perfunctory investigation; speeds, collision contacts, injury analysis, culpability, etc. can not be related with acceptable accuracy.

The chronological defect of the exposure data caused difficulty and had the prospect of reducing the effectiveness of the research findings. Most of the **major** factors of concern in this research were protected by benchmark data or special analysis. Nevertheless, all accident data collection should be accompanied by timely exposure data collection.

The urban populations have changed greatly during the last ten years and it is typical that data collection teams will be required to demonstrate some fluency in Spanish.

same severity levels. For example, the rider might have six somatic injuries with the following severity scores: **1,1,3,1,2,3**. The format followed in selecting the most severe was as **follows**:

1. Arrange all injuries in order of increasing severity. In the example above, this would be: **1,1,1,2,3,3**.

2. Select the last injury on the list as the **most** severe injury.

When there is **more** than one injury at the highest severity level, as in the above example, the particular injury selected as "**most** severe" is somewhat arbitrary. **However**, it is precisely this arbitrariness that assures against selective bias in designating one injury (among **two** or more possibilities) as the "most severe".

Some of the data analyses involved collapsing data elements into smaller categories. For example, age was tabulated on a year-by-year basis. But a cross-tabulation of, for example, helmet use by age is cumbersome and any trends within the data may be unclear until the 50 individual year categories are collapsed into several groups - in this example 0-16 years, 17-20, 21-26, 27-39, 40-49, 50-59, 60-97 years. When cumbersome data is treated in this manner, basic trends may be more readily apparent, and this type of treatment has been used in this report.

4.7 Research Recommendations

This research demanded a special qualification for the staff: It was mandatory that the research team members have extensive motorcycle experience in addition to the professional qualifications. It was vital that the research team members have the experience, perspective and sensitivity to the special problems of the motorcycle rider and the special characteristics of motorcycle accidents. It is sure that without this special ingredient, the factors critical to motorcycles would NOT have been collected with fidelity.

The comparisons of exposure data and registration data showed great differences. Actual motorcycle use differs greatly from registration information, e.g., many registered motorcycles are stored or are in garages and are not actually in use on the street by those licensed riders. Also, the use of traffic accident reports for motorcycle accident research must be limited. Only very basic information is available from such casual and perfunctory investigation; speeds, collision contacts, injury analysis, culpability, etc. can not be related with acceptable **accuracy**.

The chronological defect of the exposure data caused difficulty and had the **prospect** of reducing the effectiveness of the research findings. Most of the major factors of concern in this research were protected by benchmark data or special analysis. Nevertheless, all accident data collection should be accompanied by timely exposure data collection.

The urban populations have changed greatly during the last ten years and it is typical that data collection teams will be required to demonstrate some fluency in Spanish.

Any future research on motorcycle accidents should include **more** in-depth examination of characteristics of the driver of the other vehicle involved in collision with the motorcycle. **The** dominant culpability of the driver of the other vehicle shown in these data demands further detailed examination to determine concisely the causes of the search and detection failures.

5.0 ACCIDENT CHARACTERISTICS AND ENVIRONMENTAL FACTORS

This section of the accident data shows the characteristics of the accidents and the contribution of the environmental factors in the accident events. The single and multiple vehicle accidents are analyzed for the accident time, accident configuration, cause factors and the contribution of the environment to those causes. For example, in the case of the multiple vehicle collision, it is shown that the driver of the other vehicle is most often the culpable party in the accident by violating the right-of-way of the oncoming motorcycle, usually as a result of a detection failure. The adjacent traffic and buildings contribute to the inability of the other driver to detect the motorcycle in traffic, but the significant item is the lack of conspicuity of the motorcycle in traffic. Those factors relating to the lack of conspicuity are investigated in special detail to show the effect of the visibility contribution of the upper torso garment worn by the motorcycle rides.

5.1 USC Accident Data Acquisition

Table 5.1.1 shows the performance of the USC-DOT research teams in the collection of motorcycle accident data. Of the 900 on-scene, in-depth accident cases, (OSIDs), 68.6% were investigated at the accident location as soon as possible after the occurrence of the accident. In this way, the vehicles and most human subjects were still at that location. The remaining 31.4% of the detailed investigations were conducted by follow-up activities within 24 hours after the accident occurrence.

TABLE 5.1.1 TYPE OF INVESTIGATION BY USC (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|
| on-scene | 1. | 617 | 68.6 | 68.6 |
| Follow-up in 24 hours | 2. | 283 | 31.4 | 3.14 |
| | TOTAL | 900 | 100.0 | 100.0 |

The traffic accident reports (TARs) for motorcycle accidents in the study area were collected on a regular basis from the law enforcement jurisdictions in the study area. A total of 3600 were coded and prepared for analysis and approximately 320 others have been collected for additional reference. There were no omissions in this collection procedure, and subsequent data comparisons showed that this file represented 100% of the reported accidents in the study area at that time.

5.2 Accident Distribution by Time, Day, and Month

Tables 5.2.1 and 5.2.2 show the distribution of the accidents by the time of day with the greatest concentration of all accidents in the time of 3 to 6 PM.

TABLE 5.2.1. TIME OF DAY OF ACCIDENTS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| 0001 thru 0100 | 1. | 12 | 1.3 | 1.3 |
| 0101 thru 0200 | 2. | 6 | 0.7 | 0.7 |
| 0201 thru 0300 | 3. | 11 | 1.2 | 1.2 |
| 0301 thru 0400 | 4. | 7 | 0.8 | 0.8 |
| 0401 thru 0500 | 5. | 2 | 0.2 | 0.2 |
| 0501 thru 0600 | 6. | 2 | 0.2 | 0.2 |
| 0601 thru 0700 | 7. | 14 | 1.6 | 1.6 |
| 0701 thru 0800 | a. | 17 | 1.9 | 1.9 |
| 0801 thru 0900 | 9. | 33 | 3.7 | 3.7 |
| 0901 thru 1000 | 10. | 34 | 3.8 | 3.8 |
| 1001 thru 1100 | 11. | 34 | 3.8 | 3.5 |
| 1101 thru 1200 | 12. | 64 | 7.1 | 7.1 |
| 1201 thru 1300 | 13. | 92 | 10.2 | 10.2 |
| 1301 thru 1400 | 14. | 67 | 7.4 | 7.4 |
| 1401 thru 1500 | 15. | 80 | 8.9 | 8.9 |
| 1501 thru 1600 | 16. | 93 | 10.3 | 10.3 |
| 1601 thru 1700 | 17. | 89 | 9.9 | 9.9 |
| 1701 thru 1800 | 18. | 78 | a.7 | 8.7 |
| 1801 thru 1900 | 19. | 43 | 4.8 | 4.8 |
| 1901 thru 2000 | 20. | 45 | 5.0 | 5.0 |
| 2001 thru 2100 | 21. | 33 | 3.7 | 3.7 |
| 2101 thru 2200 | 22. | 23 | 2.6 | 2.6 |
| 2201 thru 2300 | 23. | 9 | 1.0 | 1.0 |
| 2301 thru 2400 | 24. | 12 | 1.3 | 1.3 |
| | TOTAL | 900 | 100.0 | 100.0 |

The fatal accidents (54) were well distributed throughout the 24 hours without significant concentration.

Correlation was made with the data from the traffic accident reports and the on-scene investigations. Approximately 10% of the on-scene, in-depth cases did not have a traffic accident report prepared because of limited damage to the other vehicle, limited property damage, or limited injuries to the motorcycle rider. It is suspected that many other single vehicle motorcycle accidents occurred and were not recorded with traffic accident reports and are unknown in public record because of injuries to the rider only.

TABLE 5.2.2. TIME OF DAY OF ACCIDENT (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|------------|--------------------|------------------------|------------------------|
| 0001 thru 0100 | 1. | 89 | 2.5 | 2.5 |
| 0101 thru 0200 | 2. | 57 | 1.6 | 1.6 |
| 0201 thru 0300 | 3. | 52 | 1.4 | 1.4 |
| 0301 thru 0400 | 4. | 25 | 0.7 | 0.7 |
| 0401 thru 0500 | 5. | 8 | 0.2 | 0.2 |
| 0501 thru 0600 | 6. | 13 | 0.4 | 0.4 |
| 0601 thru 0700 | 7. | 52 | 1.4 | 1.4 |
| 0701 thru 0800 | 8. | 134 | 3.7 | 3.7 |
| 0801 thru 0900 | 9. | 91 | 2.5 | 2.5 |
| 0901 thru 1000 | 10. | 93 | 2.6 | 2.6 |
| 1001 thru 1100 | 11. | 127 | 3.5 | 3.5 |
| 1101 thru 1200 | 12. | 155 | 4.3 | 4.3 |
| 1201 thru 1300 | 13. | 263 | 7.3 | 7.3 |
| 1301 thru 1400 | 14. | 201 | 5.6 | 5.6 |
| 1401 thru 1500 | 15. | 253 | 7.0 | 7.0 |
| 1501 thru 1600 | 16. | 291 | 8.1 | 8.1 |
| 1601 thru 1700 | 17. | 374 | 10.4 | 10.4 |
| 1701 thru 1800 | 18. | 345 | 9.6 | 9.6 |
| 1801 thru 1900 | 19. | 228 | 6.3 | 6.3 |
| 1901 thru 2000 | 20. | 195 | 5.4 | 5.4 |
| 2001 thru 2100 | 21. | 194 | 5.4 | 5.4 |
| 2101 thru 2200 | 22. | 138 | 3.8 | 3.8 |
| 2201 thru 2300 | 23. | 132 | 3.7 | 3.7 |
| 2301 thru 2400 | 24. | 85 | 2.4 | 2.4 |
| Not Reported | 98. | 5 | 0.1 | MISSING |
| TOTAL | | 3600 | 100.0 | 100.0 |

Tables 5.2.3 and 5.2.4 show the accident distribution by day of week with Friday accounting for the greatest concentration.

Tables 5.2.5 through 5.2.8 show the months of accident occurrence for the data acquired. **These** data are included to illustrate acquisition performance and are not necessarily representative of the distribution of all such accidents. However, these data portray the typical concentration of accidents during the **summer** months of June, July, and August.

5.3 Objects Involved in Collision with Motorcycles

Table 5.3.1 shows those objects involved in collision contact with the motorcycles in the 900 on-scene, in-depth accident cases. Of the cases shown,

TABLE 5.2.3. DAY OF THE WEEK (OSIDs)

| category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|-------|--------------------|------------------------|
| Monday | 1. | 137 | 15.2 |
| Tuesday | 2. | 132 | 14.7 |
| Wednesday | 3. | 145 | 16.1 |
| Thursday | 4. | 128 | 14.2 |
| Friday | 5. | 153 | 17.0 |
| Saturday | 6. | 110 | 12.2 |
| Sunday | 7. | 95 | 10.6 |
| | TOTAL | 900 | 100.0 |

TABLE 5.2.4. DAY OF THE WEEK (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|-------|--------------------|------------------------|
| Monday | 1. | 498 | 13.8 |
| Tuesday | 2. | 492 | 13.7 |
| Wednesday | 3. | 525 | 14.6 |
| Thursday | 4. | 493 | 13.7 |
| Friday | 5. | 590 | 16.4 |
| Saturday | 6. | 524 | 14.6 |
| Sunday | 7. | 478 | 13.3 |
| | TOTAL | 3600 | 100.0 |

TABLE 5.2.5. MONTH OF ACCIDENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|--------------|--------------------|------------------------|
| January | 1. | 52 | 5.8 |
| February | 2. | 51 | 5.7 |
| March | 3. | 63 | 7.0 |
| April | 4. | 87 | 9.1 |
| May | 5. | 66 | 7.3 |
| June | 6. | 88 | 9.8 |
| July | 7. | 109 | 12.1 |
| August | 8. | 107 | 11.9 |
| September | 9. | 75 | 8.3 |
| October | 10. | 76 | 8.4 |
| November | 11. | 63 | 7.0 |
| December | 12. | 63 | 7.0 |
| | TOTAL | 900 | 100.0 |

TABLE 5.2.6. MONTH OF ACCIDENT (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|--------------|--------------------|------------------------|
| January | 1. | 319 | 8.9 |
| February | 2. | 340 | 9.4 |
| March | 3. | 389 | 10.8 |
| April | 4. | 394 | 10.9 |
| May | 5. | 327 | 9.1 |
| June | 6. | 403 | 11.2 |
| July | 7. | 237 | 8.9 |
| August | 8. | 212 | 6.6 |
| September | 9. | | 5.9 |
| October | 10. | 246 | 6.8 |
| November | 11. | 226 | 6.3 |
| December | 12. | 187 | 5.2 |
| | TOTAL | 3600 | 100.0 |

TABLE 5.2.7. MONTH OF ACCIDENT (1976 TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|------------------|-----------|--------------------|------------------------|
| January | 1. | 166' | 4.6 |
| February | 2. | 140 | 3.9 |
| March | 3. | 183 | 5.1 |
| April | 4. | 185 | 5.1 |
| May | 5. | 199 | 5.5 |
| June | 6. | 247 | 6.9 |
| July | 7. | 251 | 7.0 |
| August | a. | 235 | 6.5 |
| September | 9. | 212 | 5.9 |
| October | 10. | 246 | 6.8 |
| November | 11. | 226 | 6.3 |
| December | 12. | 187 | 5.2 |
| (1977 Accidents) | | 1123 | 31.2 |
| TOTAL | | 3600 | 100.0 |

TABLE 5.2.8. MONTH OF ACCIDENT (1977 TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|------------------|-----------|--------------------|------------------------|
| January | 1. | 153 | 4.2 |
| February | 2. | 200 | 5.6 |
| March | 3. | 206 | 5.7 |
| April | 4. | 209 | 5.8 |
| May | 5. | 128 | 3.6 |
| June | 6. | 156 | 4.3 |
| July | 7. | 69 | 1.9 |
| August | 8. | 2 | 0.1 |
| (1976 Accidents) | 0. | 2477 | 68.8 |
| TOTAL | | 3600 | 100.0 |

TABLE 5.3.1. OBJECT STRUCK BY MOTORCYCLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|
| Passenger Car | 1. | 588 | 65.3 |
| Other Motorcycle | 2. | 27 | 3.0 |
| Fixed Object | 3. | 40 | 4.4 |
| Animal | 4. | 8 | 0.9 |
| Roadway | 5. | 172 | 19.1 |
| Other 4-wheel Vehicle | 6. | 48 | 5.3 |
| Other | 7. | 17 | 1.9 |
| | TOTAL | 900 | 100.0 |

230 were single vehicle collisions (Table 5.3.2) where the motorcycle did not make contact with another vehicle. The 230 cases were as follows:

| | |
|-----------------------------------|-----------|
| Fixed Object | 40 |
| Animal | 8 |
| Roadway | 172 |
| Others (pedestrians, trash, etc.) | <u>10</u> |
| TOTAL | 230 |

TABLE 5.3.2. MULTIPLE OR SINGLE-VEHICLE COLLISION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------|-------|--------------------|------------------------|------------------------|
| Single Vehicle Collision | 1. | 230 | 25.6 | 25.7 |
| Multiple Vehicle Collision | 2. | 667 | 74.1 | 74.3 |
| Unknown | 3. | 3 | 0.3 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

In some of the 230 single vehicle collisions, another vehicle was involved in accident causation, e.g., an automobile turns left in front of the oncoming motorcycle, the motorcycle rider over-brakes, slides out and falls to the roadway but does not collide with the automobile. Forty-nine such cases occurred so that there were 181 cases where only the motorcycle was involved.

Table 5.3.3 shows the number of vehicles involved from the 3600 police traffic accident reports. Table 5.3.4 shows the collision type for those 3600 accidents. There is generally no precise distinction made for collision

TABLE 5.3.3. NUMBER OF VEHICLES INVOLVED (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-------------------------|-------|--------------------|------------------------|
| Single Vehicle Accident | 1. | 803 | 22.3 |
| Two Vehicles | 2. | 2709 | 75.2 |
| Three Vehicles | 3. | 79 | 2.2 |
| Four Vehicles | 4. | 7 | 0.2 |
| Five Vehicles | 5. | 2 | 0.1 |
| | TOTAL | 3600 | 100.0 |

TABLE 5.3.4 COLLISION TYPE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------|-----------|--------------------|------------------------|------------------------|
| Head-On | 1. | 174 | 4.8 | 6.3 |
| Rear-End | 2. | 543 | 15.2 | 19.9 |
| Side-Swipe | 3. | 236 | 6.6 | 8.6 |
| Angle | 4. | 1061 | 29.5 | 38.6 |
| Broadside | 5. | 673 | 18.7 | 24.5 |
| Others | 6. | 59 | 1.6 | 2.1 |
| Unknown | a. | 54 | 1.5 | Missing |
| N.A. Single Vehicle Accident | 9. | 795 | 22.1 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

contact and, as a result, many of the single vehicle accidents may yet involve another vehicle in causation but not collision contact.

5.4 Accident Precipitating Factor

Table 5.4.1 shows the accident precipitating factors for the 900 on-scene, in-depth accident investigation cases. For simplicity, this factor may be considered to be the primary factor of accident causation. Table 5.4.2 shows the accident precipitating factor for the 230 single vehicle collisions and Table 5.4.3 shows the accident precipitating factors for the multiple vehicle collisions.

Phantom Vehicle was selected as the **accident** precipitating factor when the only evidence **pointed** to unsafe action of another vehicle which could be described but not identified. The unidentified phantom vehicle was **NOT** involved in collision contact with the motorcycle. As an example, one motorcycle rider

TABLE 5.4.1. ACCIDENT PRECIPITATING FACTOR (All OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-------|--------------------|------------------------|------------------------|
| Phantom Vehicle | 0. | 4 | 0.4 | 0.4 |
| MC Error | 1. | 367 | 40.8 | 40.9 |
| OV Violation of MC ROW | 2. | 457 | 50.8 | 50.9 |
| Roadway Defect | 3. | 18 | 2.0 | 2.0 |
| Pedestrian | 4. | 6 | 0.7 | 0.7 |
| Animal | 5. | 10 | 1.1 | 1.1 |
| Vehicle Failure | 6. | 25 | 2.8 | 2.8 |
| Other | 7. | 11 | 1.2 | 1.2 |
| Unknown | 8. | 2 | 0.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 5.4.2. ACCIDENT PRECIPITATING FACTOR (Single Vehicle OSIDs Only)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|------------------------|-------|--------------------|------------------------|
| Phantom Vehicle | 0. | 4 | 1.7 |
| MC Error | 1. | 148 | 64.3 |
| OV Violation of MC ROW | 2. | 25 | 10.9 |
| Roadway Defect | 3. | 15 | 6.5 |
| Pedestrian | 4. | 5 | 2.2 |
| Animal | 5. | 9 | 3.9 |
| Vehicle Failure | 6. | 21 | 9.1 |
| Other | 7. | 3 | 1.3 |
| | TOTAL | 230 | 100.0 |

swerved to the right and off the straight roadway to avoid an oncoming, wrong-way automobile which was described but not identified by the rider, and there were no witnesses to support the claim that another vehicle was actually present. Generally, such claims about the phantom vehicle were vague and questionable and very difficult to support. In this way, it is difficult to classify such an accident but it is **sure** that there was only one vehicle involved in the collision, and that was the motorcycle. Hence, the classification here includes the phantom vehicle accident as a single vehicle collision. In addition, these "phantom vehicle" accidents are not large in number and conveniently fall into the group of single vehicle collisions.

Motorcycle Rider Error **was** selected as the accident precipitating factor when the accident evidence showed that the rider's actions were responsible

TABLE 5.4.3. ACCIDENT PRECIPITATING FACTOR
(Multiple Vehicle OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|------|--------------------|------------------------|------------------------|
| MC Error | 1. | 219 | 32.8 | 32.9 |
| OV Violation MC ROW | 2. | 430 | 64.5 | 64.7 |
| Roadway Defect | 3. | 3 | 0.4 | 0.5 |
| Pedestrian | 4. | 1 | 0.1 | 0.2 |
| Animal | 5. | 1 | 0.1 | 0.2 |
| Vehicle Failure | 6. | 3 | 0.4 | 0.5 |
| Other | 7. | 8 | 1.2 | 1.2 |
| Unknown | 8. | 2 | 0.3 | Missing |
| TOTAL | | 667 | 100.0 | 100.0 |

for the collision. As an example, an alcohol-involved motorcycle rider enters a curve at excess speed and runs wide on the turn, running off the roadway and crashing. In this case, the actions of the rider were the principal factors in the accident and the error would be assigned to the rider. Table 5.4.2 portrays the expected dominance of motorcycle rider error in the single vehicle collision, 64.3% of the 230 cases. Note also that in 10.9% of the single vehicle collisions, the other vehicle involved in the collision was at fault. Such a case would be represented by an automobile backing from a parking place into the right-of-way of an oncoming motorcycle. The motorcycle rider **over-brakes**, slides out and falls to the roadway without collision contact with the offending automobile. If there had been sufficient time and distance for the motorcycle rider to easily avoid collision by proper braking, the accident precipitating factor may have been determined as motorcycle rider error rather than the right-of-way violation by the automobile.

Other Vehicle Violation of the Motorcycle Right-of-Way is a predominating factor in the 900 on-scene, in-depth accident cases; 50.9% of all those accidents are attributable to the driver of the other vehicle involved in the accident. This fact is especially clear when the multiple vehicle collision data of Table 5.4.3 show that the 64.9% of those accidents are due to the actions of the driver of the other vehicle. The typical accident in this category is portrayed by the automobile in traffic turning left into the path of the oncoming motorcycle. In such an accident, the culpability is exclusively due to the action of the driver of the automobile. The greatest part of this accident cause factor is related to the failure of the automobile driver to "see" the oncoming motorcycle, or to "see it in time" to avoid the collision.

In the typical accident involving the automobile driver culpability, the post-crash statement of the automobile driver is "I signaled to turn left, and started out when it was clear. Then something hit my car and I later saw the motorcycle and the guy lying in the street; I never saw him! Look what he did to my car!" The motorcycle rider would usually say "all of a sudden this car pulled out in front of me. The driver was looking right at me!"

This dominant culpability of the driver of the other vehicle is a critical exposition of the failure to detect a relatively unfamiliar vehicle on a collision path where motion **conspicuity** is absent. It emphasizes the special need for high contrast conspicuity for the motorcycle and rider. A special sampling of 62 of these cases showed that there were **no** drivers of the accident involved **automobiles** who had any motorcycle experience; hence the motorcycle was an **unfamiliar** as well as **inconspicuous** target.

Roadway Defect was assigned when some severe irregularity of the **roadway surface** or traffic control was present. As shown by the accompanying data, this factor was closely related to a loss of motorcycle control and was most likely to cause a single vehicle collision. Whole roadway defects were only 2.0% of all 900 accidents, this factor appears as 6.5% of the single vehicle collisions. A typical accident of this sort would be the loss of control by a "experienced motorcycle rider upon encountering a 1-1/2" pavement ridge nearly parallel to his path.

Pedestrian action was the precipitating factor when the pedestrian made some unsafe, darting move into the path of the motorcycle. This factor was chosen when it was clear that the pedestrian made this unsafe move **away** from traffic controls and crosswalks.

Animal involvement was selected as the accident precipitating factor when the animal in traffic was actually involved in the collision with the motorcycle, or was the principal hazard which caused action by the motorcycle rider, or other vehicle driver, and created the accident.

Vehicle Failure was chosen as the **accident** precipitating factor when mechanical performance of the motorcycle caused the accident. Vehicle failure was the principal factor in 2.8% of all the 900 accidents, and of course, those were primarily single vehicle collisions. Typical **cases** of vehicle failure involved puncture flats of the tires or a maintenance defect which caused loss of control.

Other was selected for those special cases where some strange circumstances did not allow concise determination of the accident cause. **For** example, a station wagon was struck in the side by a "operating but RIDERLESS motorcycle which entered the intersection against traffic controls. No rider, passenger, or owner could be located for the motorcycle.

Table 5.4.4 shows the primary and secondary causes of the 3600 motorcycle accidents analyzed from traffic accident reports. A comparison of these data shows that only basic information on causation is available.

5.5 Pre-Crash Vehicle Motions

Table 5.5.1 (Appendix C.1) shows the precrash motions of the motorcycle and other vehicle involved in the 900 on-scene, in-depth accident cases. The outstanding elements of the data are as follows:

1. The most frequent accident configuration is the motorcycle proceeding straight and the automobile makes a left turn (most usually in front of the

TABLE 5.4.4. CAUSE OF ACCIDENT (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------|------|--------------------|------------------------|------------------------|
| <u>Primary</u> | | | | |
| No Cause Cited | 0. | 220 | 6.1 | 6.6 |
| MC Driver | 1. | 1414 | 40.9 | 44.2 |
| OV Driver | 2. | 1641 | 45.6 | 49.2 |
| Unknown | 8. | 265 | 7.4 | Missing |
| TOTAL | | 3600 | 100.0 | 100.0 |
| <u>Secondary</u> | | | | |
| No Cause Cited | 0. | 3225 | 89.6 | 89.8 |
| MC Driver | 1. | 268 | 7.4 | 7.5 |
| OV Driver | 2. | 100 | 2.8 | 2.8 |
| Unknown | 8. | 7 | 0.2 | Missing |
| TOTAL | | 3600 | 100.0 | 100.0 |

oncoming motorcycle). This configuration appears in 26.7% of all the accidents, or 33.4% of the multiple vehicle collisions.

2. The second most frequent accident configuration is with both vehicles proceeding straight, and this configuration appears in 10.9% of all the accidents.

Table 5.5.2 (Appendix C.1) shows the same details for the 230 single vehicle collisions. The involvement of the other vehicle in these data is that of causation only since no collision contact occurs. The outstanding elements for these data are as follows:

1. The most frequent configuration was the motorcycle proceeding straight in 60.0% of the motorcycle data.

2. The motorcycle is turning (right, left, or U-turn) in 35.2% of the motorcycle data.

Table 5.5.3 (Appendix C.1) shows the precrash motions for the motorcycle and the other vehicle involved in the 3600 accident cases analyzed from traffic accident reports. Case-by-case comparison of traffic accident reports showed that the traffic accident reports do not accurately portray the precrash vehicle motions. Of course, this disagreement is obvious from comparison of the data of Tables 5.5.1 and 5.5.3, and it is recommended that traffic accident report data not be relied upon to describe any detail of vehicle precrash motions. The typical traffic accident report is no substitute for the detailed information from a competent accident reconstruction.

Tables 5.5.4 (Appendix C.1) and 5.5.5 (Appendix C.1) show the precrash motion of the motorcycle and other vehicle as a function of accident precipitating factor. An important element of 5.5.4 is that the motorcycle precrash motion is straight in 87.3% of those cases where another **vehicle** violates its right-of-way. This fact demonstrates that the **precrash** collision geometry offers **little** - if any - motorcycle conspicuity due to **motion** and that **con-**spicuity due to contrast is an essential element of accident prevention for the motorcycle rider. Also, the motorcycle precrash motion is straight in 47.4% of those cases where motorcycle rider error is the precipitating factor.

Table 5.5.5 shows the dominating condition of the other vehicle making a left turn when it violates the motorcycle right-of-way, 50.5% of that accident precipitating factor.

5.6 Accident Scene, Type of Area

The urban and suburban areas predominated in the 900 multidisciplinary accident investigation cases. Truly rural settings (undeveloped open land and rural locations) accounted for only 9.4% of the total cases. The data of Table 5.6.1 show that business-shopping areas were outstanding as accident

TABLE 5.6.1. ACCIDENT SCENE, TYPE OF AREA

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|
| <u>OSIDs</u> | | | | |
| Industrial | 1. | 72 | 8.0 | 8.0 |
| Business/Shopping | 2. | 334 | 37.1 | 37.2 |
| Apartments | 3. | 84 | 9.3 | 9.3 |
| Residential | 4. | 288 | 32.0 | 32.0 |
| Undeveloped | 5. | 19 | 2.1 | 2.1 |
| School | 6. | 36 | 4.0 | 4.0 |
| Rural | 7. | 66 | 7.3 | 7.3 |
| Unknown | 8. | 1 | 0.? | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| TARS | | | | |
| Industrial | 1. | 91 | 2.5 | 2.6 |
| Business/Shopping | 2. | 2000 | 55.6 | 56.9 |
| School/Playground | 3. | 13 | 0.4 | 0.4 |
| Park/Recreation | 4. | 22 | 0.6 | 0.6 |
| Residential | 5. | 1229 | 34.1 | 35.0 |
| Rural/Agriculture | 6. | 6 | 0.2 | 0.2 |
| Undeveloped | 7. | 151 | 4.2 | 4.3 |
| Unknown | 8. | 88 | 2.4 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

locations for the 900 on-scene, in-depth accident cases. The data show the same dominating factor for the 3600 traffic accident report cases although there is **no** agreement in quantification. As in other data, case-by-case comparisons of the traffic accident reports and the **on-scene** data showed low reliability of the traffic accident report description of the area.

5.7 Accident Scene Illumination

Table 5.7.1 shows the data for accident scene illumination for the accident cases studied. Daytime and daylight conditions predominate in both sets of data. Note that very low light conditions are not a significant part of the accidents, i.e., about 3%.

TABLE 5.7.1. ACCIDENT SCENE ILLUMINATION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-------|--------------------|------------------------|------------------------|
| OSIDs | | | | |
| Daylight | 1. | 676 | 75.1 | 75.1 |
| Dawn or Dusk | 2. | 59 | 6.6 | 6.6 |
| Night-Lighted | 3. | 140 | 15.6 | 15.6 |
| Night-Unlighted | 4. | 25 | 2.8 | 2.8 |
| | TOTAL | 900 | 100.0 | 100.0 |
| TARs | | | | |
| Daylight | 1. | 2438 | 67.7 | 67.8 |
| Dusk-Dawn | 2. | 90 | 2.5 | 2.5 |
| Dark-Unlighted | 3. | 110 | 3.1 | 3.1 |
| Dark-Lighted | 4. | 932 | 25.9 | 25.9 |
| Day-Dark-Cloudy | 5. | 27 | 0.7 | 0.8 |
| Unknown | 8. | 3 | 0.1 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

5.8 Accident Scene Weather Conditions at Time of Accident

Table 5.8.1 shows the weather conditions at the accident scene at the time of the accident. Adverse weather is not a factor in the majority of the motorcycle accident data. The data for **the 900** on-scene, in-depth investigations shows favorable weather (clear, cloudy **or** overcast) in 97.8% of those cases; the data for the 3600 traffic accident report analyses shows favorable weather in 97.1% of the accident cases.

TABLE 5.8.1 WEATHER CONDITIONS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| OSIDs | | | | |
| Clear | 1. | 752 | 83.6 | 83.6 |
| Rain | 2. | 9 | 1.0 | 1.0 |
| Drizzle | 3. | 11 | 1.2 | 1.2 |
| Cloudy/Partly Cloudy | 7. | 89 | 9.9 | 9.9 |
| Overcast | 8. | 39 | 4.3 | 4.3 |
| | TOTAL | 900 | 100.0 | 100.0 |
| TARs | | | | |
| Clear | 1. | 3490 | 96.9 | 97.1 |
| Rain | 2. | 59 | 1.6 | 1.6 |
| Fog | 3. | 6 | 0.2 | 0.2 |
| Others | 4. | 38 | 1.1 | 1.1 |
| Unknown | 8. | 7 | 0.2 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

Of **course**, these accident data are clearly related to exposure conditions; motorcycle traffic essentially disappears in adverse weather conditions.

Table 5.8.2 shows the air temperature at the accident scene on the 900 **on-scene**, in-depth accident investigations.

TABLE 5.8.2. TEMPERATURE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| 41 thru 50°F | 5. | 13 | 1.4 | 1.5 |
| 51 thru 60 | 6. | 118 | 13.1 | 13.5 |
| 61 thru 70 | 7. | 318 | 35.3 | 36.3 |
| 71 thru so | 8. | 324 | 36.0 | 37.0 |
| 81 thru 90 | 9. | 91 | 10.1 | 10.4 |
| 91 thru 100 | 10. | 11 | 1.2 | 1.3 |
| Unknown | 98. | 25 | 2.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

5.9 Trip Plan, Motorcycle Rider and Other Vehicle Driver

The trip plan for the accident-involved motorcycle rider was determined for the 900 multidisciplinary accident cases. The origins and destinations are shown in Table 5.9.1 and in each of those tabulations, home and work predominate. The crosstabulation of motorcycle rider trip origin and destination is shown in Table 5.9.2 (Appendix C.1). **This** crosstabulation shows that the home and work transportation plans include 26.2% of the accidents. The home, work and shopping-errand transportation plans include 48.3% of the accidents.

TABLE 5.9.1. RIDER TRIP PLAN (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-------|--------------------|------------------------|------------------------|
| <u>Origin</u> | | | | |
| Home | 1. | 315 | 35.0 | 38.3 |
| Work | 2. | 163 | 13.1 | 19.8 |
| Shopping | 3. | 89 | 9.9 | 10.8 |
| Recreation | 4. | 77 | 8.6 | 9.4 |
| Friends/Relatives | 5. | 120 | 13.3 | 14.6 |
| Bar/Drinking Party | 6. | 18 | 2.0 | 2.2 |
| School | 7. | 41 | 4.6 | 5.0 |
| Unknown | 8. | 65 | 1.2 | Missing |
| Not Applicable | 9. | 12 | 1.3 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Destination</u> | | | | |
| Home | 1. | 274 | 30.4 | 32.9 |
| Work | 2. | 153 | 17.0 | 18.4 |
| Shopping | 3. | 142 | 15.8 | 17.1 |
| Recreation | 4. | 122 | 13.6 | 14.7 |
| Friends/Relatives | 5. | 115 | 12.8 | 13.8 |
| Bar/Drinking Party | 6. | 1 | 0.1 | 0.1 |
| School | 7. | 25 | 2.8 | 3.0 |
| Unknown | 8. | 55 | 6.1 | Missing |
| Not Applicable | 9. | 13 | 1.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The length of the intended trip for the motorcycle rider is shown in Table 5.9.3. The median value of this intended trip is **approximately** 4 miles.

Section 5.10 describes the time from the trip origin to the accident location and the median value of that time is less than 6 minutes. Consequently it is typical that the accident situation is much more closely associated with the trip origin.

work transportation plans included 30.8% of the accidents. The home, work and shopping-errand transportation plans included 64.9% of the accidents. Table 5.9.5 (Appendix C.1) provides a crosstabulation of original and destination of the other vehicle driver trip plan.

5.10 Time Riding Before Accident

Table 5.10.1 shows the distribution of time riding from trip origin to the accident location. The median value for this distribution is approximately 0.1 hours or 6 minutes. The typical accident location in this study of the 900 accidents occurs relatively close to the origin of the trip, e.g., 21.2% occurred at the trip origin less than three minutes after the departure.

TABLE 5.10.1. TIME RIDING **MOTORCYCLE** BEFORE ACCIDENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Hours | 0.0 | 174 | 19.3 | 21.2 | 21.2 |
| | 0.1 | 232 | 25.8 | 28.2 | 49.4 |
| | 0.2 | 151 | 16.8 | 18.4 | 67.8 |
| | 0.3 | 112 | 12.4 | 13.6 | 81.4 |
| | 0.4 | 12 | 1.3 | 1.5 | 82.8 |
| | 0.5 | 48 | 5.3 | 5.8 | 88.7 |
| | 0.6 | 9 | 1.0 | 1.1 | 89.9 |
| | 0.7 | 9 | 1.0 | 1.1 | 90.9 |
| | 0.8 | 6 | 0.7 | 0.7 | 91.6 |
| | 1.0 | 24 | 2.7 | 2.9 | 94.5 |
| | 1.1 | 1 | 0.1 | 0.1 | 94.6 |
| | 1.2 | 1 | 0.1 | 0.1 | 94.8 |
| | 1.3 | 4 | 0.4 | 0.5 | 95.3 |
| | 1.5 | 6 | 0.7 | 0.7 | 96.0 |
| | 1.7 | 1 | 0.1 | 0.1 | 96.1 |
| | 2.0 | 12 | 1.3 | 1.5 | 97.6 |
| | 2.5 | 2 | 0.2 | 0.2 | 97.8 |
| | 3.0 | 4 | 0.4 | 0.5 | 98.3 |
| | 3.5 | 2 | 0.2 | 0.2 | 98.5 |
| | 4.0 | 4 | 0.4 | 0.5 | 99.0 |
| 5.0 | 5 | 0.6 | 0.6 | 99.6 | |
| 5.5 | 1 | 0.1 | 0.1 | 99.8 | |
| 6.0 | 1 | 0.1 | 0.1 | 99.9 | |
| 7.5 | 1 | 0.1 | 0.1 | 100.0 | |
| Unknown | 9.8 | 78 | 8.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Note that 94.5% of the accidents occurred within one hour. The conclusion available is that fatigue due to riding is not a factor in these accidents. Also, the short trip lengths related in **Section 5.9** and these short riding times may be associated with low priorities for rider protective equipment such as safety helmets, eye protection, gloves, etc.

The distribution of riding time for the 54 fatal accidents shown in Table 5.10.2, and the characteristics are essentially the same as the entire 900.

TABLE 5.10.2. TIME RIDING MOTORCYCLE BEFORE ACCIDENT
(OSID Fatal Only)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|------------|--------------------|------------------------|------------------------|--------------------------|
| Hours | 0.0 | 10 | 18.5 | 29.4 | 29.4 |
| | 0.1 | 8 | 14.8 | 23.5 | 52.9 |
| | 0.2 | 5 | 9.3 | 14.7 | 67.6 |
| | 0.3 | 7 | 13.0 | 20.6 | 88.2 |
| | 0.4 | 1 | 1.9 | 2.9 | 91.2 |
| | 0.5 | 1 | 1.9 | 2.9 | 94.1 |
| | 0.6 | 1 | 1.9 | 2.9 | 97.1 |
| Unknown | 1.0 | 1 | 1.9 | 2.9 | 100.0 |
| | 9.8 | 20 | 37.0 | Missing | 100.0 |
| | TOTAL | 54 | 100.0 | 100.0 | |

5.11 Motorcycle Roadway

Table 5.11.1 shows the description of the roadway that the motorcycle was traveling at the accident location. Major and minor **arterials** were the roadway traveled by the motorcycle in 55.9% of the 900 on-scene, in-depth accident cases. Freeway traffic routes accounted for 10.0% of the cases.

Table 5.11.2 shows the intersection type for the 900 on-scene, in-depth accident cases. Approximately two-thirds of the accidents occurred at intersections. This concentration of accidents at the area of intersections is not reflected by the data from analysis of the 3600 traffic accident reports. These data specify only 40.0% of the accidents as intersection related. **Case-**by-case comparison of the two sets of accident data showed that the traffic accident reports employed a strict geographic interpretation related to the point of impact in the collision. The on-scene, in-depth cases applied a more liberal interpretation of intersection or non-intersection traffic related events rather than strict geographic rules. Consequently, the data for the 900 on-scene, in-depth cases will more accurately represent the accident characteristics.

TABLE 5.11.1. ROADWAY MOTORCYCLE WAS TRAVELING (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------------|-------|--------------------|------------------------|------------------------|
| Freeway Mainline | 1. | 61 | 6.8 | 6.8 |
| Freeway On-ramp | 2. | 6 | 0.7 | 0.7 |
| Freeway Off-ramp | 3. | 12 | 1.3 | 1.3 |
| Freeway Transition | 4. | 9 | 1.0 | 1.0 |
| Freeway Frontage, Service Road | 5. | 2 | 0.2 | 0.2 |
| Arterials | 6. | 503 | 55.9 | 55.9 |
| Non-Arterial | 7. | 271 | 30.1 | 30.1 |
| Temporary | 8. | 1 | 0.1 | 0.1 |
| Parking Lot | 9. | 8 | 0.9 | 0.9 |
| Alley | 10. | 10 | 1.1 | 1.1 |
| Driveway | 11. | 8 | 0.9 | 0.9 |
| Other | 12. | 9 | 1.0 | 1.0 |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 5.11.2. INTERSECTION TYPES

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-------------------------|-------|--------------------|------------------------|
| <u>All OSIDs</u> | | | |
| Non-Intersection | 0. | 296 | 32.9 |
| "T" Intersection | 1. | 94 | 10.4 |
| Cross Intersection | 2. | 340 | 37.8 |
| Angle Intersection | 3. | 30 | 3.3 |
| Alley or Driveway | 4. | 113 | 12.6 |
| Offset Intersection | 5. | 23 | 2.6 |
| Other | 6. | 4 | 0.4 |
| | TOTAL | 900 | 100.0 |
| <u>Fatal OSIDs Only</u> | | | |
| Non-Intersection | 0. | 27 | 50.0 |
| "T" Intersection | 1. | 4 | 7.4 |
| Cross Intersection | 2. | 12 | 22.2 |
| Angle Intersection | 3. | 2 | 3.7 |
| Alley or Driveway | 4. | 9 | 16.7 |
| | TOTAL | 54 | 100.0 |
| <u>TARs</u> | | | |
| Intersection | 1. | 1434 | 39.8 |
| Non-Intersection | 2. | 2149 | 59.7 |
| Unknown, Not Reported | 8. | 17 | 0.5 |
| | TOTAL | 3600 | 100.0 |

The 54 fatal cases show less association with intersections; the fatal accidents more often involved the motorcycle rider losing control by running off the road, usually on a curve.

Table 5.11.3 (Appendix C.1) **shows** the contamination of the motorcycle roadway along the motorcycle path in its tire tracks. There was no contamination in 92.1% of those accident cases and there was no contribution to accident causation. However, when oil was present in the motorcycle path, disaster was on the way and the contamination was usually the main contribution to causing a slide-out and fall to the roadway. It is also shown that vehicle residue, truck spills and construction accounted for 58.3% of **the contamination.**

Table 5.11.4 (Appendix C.1) shows that the motorcycle roadway was **dry** in at least 96.0% of all the accident cases.

Table 5.11.5 (Appendix C.1) shows the grade and alignment of the motorcycle road of travel. No cases were found related to deficient downhill braking performance or lack of uphill climbing performance of the vehicle. Also, no curves or **corners** were related to limits of vehicle performance. On the other hand, if any effect were present due to road grade and alignment, it was possibly related to visual obstacles (see Section 5.15). Note that the motorcycle roadway was level (81.3%) and straight (80.1%) in the great majority of the accident cases.

Tables 5.11.6 (Appendix C.1) and 5.11.7 (Appendix C.1) relate the lane space and lane position of the motorcycle in the precrash time.

5.12 Other Vehicle Roadway

Table 5.12.1 shows the description of the roadway that the other vehicle was **traveling**. Major and minor **arterials** were the roadway traveled by the other vehicle in 53.1% of those cases involving another vehicle. Freeway traffic routes accounted for 6.9% of the cases.

Table 5.12.2 (Appendix **C.1**) shows that the roadway for the other vehicle was dry and without contamination. There was no case where reduced roadway friction for the other vehicle caused the collision, or made the collision unavoidable by the other vehicle driver.

Table 5.12.3 (Appendix C.1) shows the grade and alignment of the other vehicle road of travel. As in the previous section 5.11, there were no cases related to deficient downhill braking or lack of uphill climbing or turning performance of the other vehicle. That other vehicle roadway was level (83.5%) and straight (87.5%) in the great majority of the accident cases.

Tables 5.12.4 (Appendix **C.1**) and 5.12.5 (Appendix C.1) relate the lane space and lane position of the other vehicle in precrash time.

TABLE 5.12.1. ROADWAY OTHER VEHICLE WAS TRAVELING (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------------|-------|--------------------|------------------------|------------------------|
| Freeway Mainline | 1. | 33 | 3.7 | 4.7 |
| Freeway On-ramp | 2. | 3 | 0.3 | 0.4 |
| Freeway Off-ramp | 3. | 5 | 0.6 | 0.7 |
| Freeway Transition | 4. | 5 | 0.6 | 0.7 |
| Freeway Frontage, Service Road | 5. | 2 | 0.2 | 0.3 |
| Arterials | 6. | 371 | 41.2 | 53.1 |
| Non-Arterial | 7. | 245 | 27.2 | 35.1 |
| Parking Lot | 9. | 3 | 0.3 | 0.4 |
| Alley | 10. | 4 | 0.4 | 0.6 |
| Driveway | 11. | 28 | 3.1 | 4.0 |
| Not Applicable | 99. | 201 | 22.3 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

5.13 Traffic Density

Moderate or heavy traffic was the situation at 59.2% of the accidents. The congestion associated with this traffic underlies the importance of obstacles to vision and the role of motorcycle conspicuity. Table 5.13.1 shows the frequencies of traffic.

TABLE 5.13.1. TRAFFIC DENSITY FOR MOTORCYCLE ROAD OF TRAVEL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| Light | 1. | 344 | 38.2 | 39.2 |
| Moderate, No Congestion | 2. | 400 | 44.4 | 45.6 |
| Heavy, Near Saturation | 3. | 133 | 14.8 | 15.2 |
| Not Observed | a. | 17 | 1.9 | Missing |
| Not Applicable | 9. | 6 | 0.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

5.14 Traffic Controls

Table 5.14.1 shows that the motorcycle roadway was uncontrolled at the location of 70.2% of the 900 accidents. A conventional traffic signal set was at the location of 25.5% of the accidents.

The accident-involved motorcycle violated the traffic control in 13.8% of the accidents where a traffic control was present.

TABLE 5.14.1. MOTORCYCLE ROADWAY TRAFFIC CONTROLS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|------|--------------------|------------------------|------------------------|
| <u>Type Control</u> | | | | |
| None | 0. | 632 | 70.2 | 70.4 |
| stop sign | 1. | 25 | 2.8 | 2.8 |
| 4-way stop sign | 2. | 3 | 0.3 | 0.3 |
| Signal | 3. | 229 | 25.4 | 25.5 |
| Officer | 4. | 2 | 0.2 | 0.2 |
| Yield | 6. | 2 | 0.2 | 0.2 |
| Pavement Marks | 7. | 2 | 0.2 | 0.2 |
| Other | 8. | 3 | 0.3 | 0.3 |
| Not Applicable | 9. | 2 | 0.2 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| <u>Did MC Violate Traffic Control?</u> | | | | |
| Yes | 1. | 36 | 4.0 | 13.8 |
| NO | 2. | 225 | 25.0 | 86.2 |
| Not Observed | 8. | 4 | 0.4 | Missing |
| Not Applicable | 9. | 635 | 70.6 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| <u>Was Signal Sensor Involved On Roadway?</u> | | | | |
| Yes | 1. | 1 | 0.1 | 0.4 |
| NO | 2. | 258 | 28.7 | 99.6 |
| Not Applicable | 9. | 141 | 71.2 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |

A typical irritant to the motorcycle rider in traffic is the traffic signal which depends on his motorcycle operating the sensor. While the matter is certainly irritating when the motorcycle will not trip the signal for the rider, that problem has little accident involvement, 0.1% of all the accidents and 0.4% of the accidents where a sensor was involved.

Table 5.14.2 lists the traffic code violations attributed to the motorcycle rider as a result of the accident circumstances.

Table 5.14.3 shows that the other vehicle roadway was uncontrolled at 57.9% of the 900 accident scenes. A conventional traffic signal set was at the location of 28.4% of the accidents.

The other vehicle involved in the accident with the motorcycle violated the traffic control in 44.9% of the accidents where a traffic control was present.

TABLE 5.14.2. MOTORCYCLE VIOLATION OF TRAFFIC CODE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 487 | 54.1 | 54.4 |
| Signals | 1. | 16 | 1.8 | 1.8 |
| Lane Control | 2. | 32 | 3.6 | 3.6 |
| Tailgating | 3. | 62 | 6.9 | 6.9 |
| Passing | 4. | 41 | 4.6 | 4.6 |
| Fail to Yield ROW | 5. | 34 | 3.8 | 3.8 |
| stop sign | 6. | 13 | 1.4 | 1.5 |
| Pedestrian ROW | 7. | 1 | 0.1 | 0.1 |
| Improper Turn | a. | 10 | 1.1 | 1.1 |
| Improper Entry | 9. | 4 | 0.4 | 0.4 |
| Fail to Signal | 10. | 2 | 0.2 | 0.2 |
| Speed | 11. | 144 | 16.0 | 16.1 |
| Parking | 12. | 1 | 0.1 | 0.1 |
| Alcohol or Drugs | 13. | 19 | 2.1 | 2.1 |
| Reckless Driving | 14. | 4 | 0.4 | 0.4 |
| Speed Contest | 16. | 7 | 0.8 | 0.8 |
| Open Container | 17. | 1 | 0.1 | 0.1 |
| Bad Lights | 18. | 3 | 0.3 | 0.3 |
| Bad Tires | 22. | 1 | 0.1 | 0.1 |
| Illegal passenger | 23. | 3 | 0.3 | 0.3 |
| Other | 97. | 10 | 1.1 | 1.1 |
| Unknown | 98. | 5 | 0.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 5.14.4 lists the traffic code violations attributed to the other vehicle driver as a result of the accident circumstances. Compare these data with those of Table 5.14.2 to distinguish the culpability of the driver of the other vehicle in violating the right-of-way of the motorcycle.

5.15 Pre-crash View Obstructions and Limitations to Vision

These items were evaluated separately in order to isolate fundamental accident environmental problems from the motorcycle conspicuity problem. The motorcycle conspicuity problem relates to seeing the motorcycle if the view path is clear; this environmental problem defines the availability of that clear path of view.

Tables 5.15.1 and 5.15.2 describe the view obstructions and visibility limitations for the motorcycle rider in the time just before the collision. Note that parked or moving vehicles affect the motorcyclist's view of the traffic hazard. The last table of 5.15.2 shows the combined effects of stationary and mobile view obstructions and visibility limitations for the motorcycle rider. The three factors combine to prevent the rider's clear view of the traffic hazard in 23.5% of the accident cases.

TABLE 5.14.3. OTHER VEHICLE TRAFFIC CONTROL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------------|-----------|--------------------|------------------------|------------------------|
| <u>Type Traffic Control</u> | | | | |
| None | 0. | 404 | 44.9 | 57.9 |
| stop Sign | 1. | 91 | 10.1 | 13.0 |
| 4-way stop | 2. | 2 | 0.2 | 0.3 |
| Signal | 3. | 198 | 22.0 | 28.4 |
| Officer | 4. | 2 | 0.2 | 0.3 |
| Other | a. | 1 | 0.1 | 0.1 |
| Not Applicable | 9. | 202 | 22.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Did OV Violate Control?</u> | | | | |
| Yes | 1. | 129 | 14.3 | 44.9 |
| NO | 2. | 158 | 17.6 | 55.1 |
| Not Observed | 8. | 4 | 0.4 | Missing |
| Not Applicable | 9. | 609 | 67.7 | Missing |
| | TOTAL | | 100.0 | 100.0 |

TABLE 5.14.4. OTHER VEHICLE VIOLATION OF TRAFFIC CODE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-----------|--------------------|------------------------|------------------------|
| None | 0. | 194 | 21.6 | 27.3 |
| Signals | 1. | 41 | 4.6 | 5.8 |
| Lane Control | 2. | 49 | 5.4 | 6.9 |
| Tailgating | 3. | 16 | 1.8 | 2.3 |
| Passing | 4. | 4 | 0.4 | 0.6 |
| Fail to Yield ROW | 5. | 283 | 31.4 | 39.8 |
| Stop Sign | 6. | 45 | 5.0 | 6.3 |
| Improper Turn | 8. | 29 | 3.2 | 4.1 |
| Improper Entry | 9. | 12 | 1.3 | 1.7 |
| Fail to Signal | 10. | 10 | 1.1 | 1.4 |
| Speed | 11. | 13 | 1.4 | 1.8 |
| Parking | 12. | 3 | 0.3 | 0.4 |
| Alcohol or Drugs | 13. | 8 | 0.9 | 1.1 |
| Reckless Driving | 14. | 3 | 0.3 | 0.4 |
| Bad Lights | 18. | 1 | 0.1 | 0.1 |
| Unknown | 98. | 1 | 0.1 | Missing |
| Not Applicable | 99. | 188 | 20.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 5.15.1. MOTORCYCLE VIEW OBSTRUCTIONS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| <u>Stationary</u> | | | | |
| None | 0. | 776 | 86.2 | 86.2 |
| Buildings | 1. | 10 | 1.1 | 1.1 |
| signs | 2. | 1 | 0.1 | 0.1 |
| vegetation | 3. | 18 | 2.0 | 2.0 |
| Walls, Fences | 4. | 10 | 1.1 | 1.1 |
| Hill | 5. | 6 | 0.7 | 0.7 |
| Curve | 6. | 11 | 1.2 | 1.2 |
| Parked Vehicles | 7. | 68 | 1.6 | 7.6 |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Mobile</u> | | | | |
| None | 0. | 799 | 88.8 | 89.9 |
| Vehicles | 1. | 88 | 9.8 | 9.9 |
| Constructions | 4. | 2 | 0.2 | 0.2 |
| Unknown | 8. | 11 | 1.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 5.15.2. MOTORCYCLE VISIBILITY AND PATH-VIEW LIMITATIONS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-----------|--------------------|------------------------|------------------------|
| <u>Visibility Limitations for MC</u> | | | | |
| None | 0. | 886 | 98.4 | 98.6 |
| Fog | 2. | 1 | 0.1 | 0.1 |
| Glare | 5. | 9 | 1.0 | 1.0 |
| Other | 6. | 2 | 0.2 | 0.2 |
| Not Applicable | 9. | 1 | 0.1 | 0.1 |
| Unknown | a. | 1 | 0.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>MC Path View - Visual Obstructions</u> | | | | |
| None | 0. | 682 | 75.8 | 76.5 |
| Yes | 1. | 209 | 23.2 | 23.5 |
| Not Applicable | 9. | 9 | 1.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The crosstabulation of Table 5.15.3 shows the significant contribution of parked and moving vehicles to view obstructions.

TABLE 5.15.3. MOTORCYCLE MOBILE VIEW OBSTRUCTIONS BY STATIONARY VIEW OBSTRUCTIONS (OSIDs)

| Stationary Obstructions | | | | | | | | | | |
|-------------------------|--|------------|------------|------------|------------|------------------|------------|------------|--------------------|--------------|
| MC View Obstruction | Count Row Pct Col Pct Tot Pct | None | Buildings | Signs | Vegetation | Walls, Fences | Hill | Curve | Parked Vehicles | Row Total |
| None | 690 | 10 | 1 | 17 | 9 | 6 | 10 | 56 | 799 | |
| | 86.4 | 1.3 | 0.1 | 2.1 | 1.1 | 0.8 | 1.3 | 7.0 | 89.9 | |
| | 89.8 | 100.0 | 100.0 | 100.0 | 90.0 | 100.0 | 100.0 | 83.6 | | |
| | 77.6 | 1.1 | 0.1 | 1.9 | 1.0 | 0.7 | 1.1 | 6.3 | | |
| Vehicles | 77 | 0 | 0 | 0 | 1 | 0 | 0 | 10 | 88 | |
| | 87.5 | 0.0 | 0.0 | 0.0 | 1.1 | 0.0 | 0.0 | 11.4 | 9.9 | |
| | 10.0 | 0.0 | 0.0 | 0.0 | 10.0 | 0.0 | 0.0 | 14.9 | | |
| | 8.7 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 1.1 | | |
| Construction | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 2 | |
| | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 50.0 | 0.2 | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1.5 | | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | | |
| Column Total | 768 | 10 | 1 | 17 | 10 | 6 | 10 | 67 | 889 | |
| | 86.4 | 1.1 | 0.1 | 1.9 | 1.1 | 0.7 | 1.1 | 7.5 | 100.0 | |

Tables 5.15.4 and 5.15.5 describe the view obstructions and visibility limitations for the driver of the other vehicle involved in the motorcycle accidents. As for the motorcycle rider, parked and moving vehicles affect the other vehicle driver's view of the hazard. The last table of 5.15.5 shows the combined effects of stationary and mobile view obstructions and visibility limitations for the driver of the other vehicle. These three factors combine to prevent the driver's clear view of the motorcycle in 32.2% of the accident cases which involved another vehicle.

The crosstabulation of Table 5.15.6 shows the significant contribution of parked and moving vehicles to view obstructions.

Table 5.15.7 shows the interaction of the combined obstructions and limitations to the precrash views of the traffic hazards. The outstanding result is that both the motorcycle rider and the driver of the other vehicle had no clear view of the hazard in 23.9% of those cases.

These findings provide important components for a traffic strategy for a motorcycle rider. The motorcycle rider must locate himself (or herself) in traffic to insure a clear path of view to all prospective hazards. If such location is not possible, every intersection offers the possible challenge of the motorcycle right-of-way.

TABLE 5.15.4. OTHER VEHICLE VIEW OBSTRUCTIONS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|------------|--------------------|------------------------|------------------------|
| <u>Stationary</u> | | | | |
| None | 0. | 558 | 62.0 | 80.1 |
| Buildings | 1. | 17 | 1.9 | 2.4 |
| Signs | 2. | 4 | 0.4 | 0.6 |
| vegetation | 3. | 21 | 2.3 | 3.0 |
| Walls, Fences | 4. | 8 | 0.9 | 1.1 |
| Hill | 5. | 6 | 0.7 | 0.9 |
| Curve | 6. | 4 | 0.4 | 0.6 |
| Parked Vehicles | 7. | 78 | a.7 | 11.2 |
| Other | 9. | 1 | 0.1 | 0.1 |
| Unknown | 98. | 1 | 0.1 | Missing |
| Not Applicable | 99. | 202 | 22.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Mobile | | | | |
| None | 0. | 586 | 65.1 | 85.7 |
| Vehicles | 1. | 97 | 10.8 | 14.2 |
| Construction | 4. | 1 | 0.1 | 0.1 |
| Unknown | 8. | 14 | 1.6 | Missing |
| Not Applicable | 9. | 202 | 22.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

A representative accident case illustrates this problem. A motorcycle is proceeding in the curb lane and a **van** is **travelling** ahead in the parallel fast **lane**. Approaching an intersection, another automobile in oncoming traffic waits until the van clears and turns left as it passes. The left-turning automobile then moves into the right-of-way of the motorcycle. In such case, the culpability is clearly that of the automobile driver but **both** the motorcyclist and automobile driver had view obstruction (the van) before the crash. The strategy appropriate for the motorcycle rider is to ride abreast, or ahead, or much farther behind the van so that he (or she) could see and be seen. The strategic position is important to insure a clear **view of** prospective **challenges** of right-of-way and high **conspicuity** should increase the likelihood of being seen.

According to Table 5.4.1, there were 457 cases where the other vehicle violated the **motorcycle** right-of-way. According to the data of Table 5.15.5, 221 accident cases had a significant limitation or obstruction of the view from **the** other vehicle to the motorcycle. This implies a considerable part of that accident precipitating factor is due to view limitation or obstruction.

TABLE 5.15.5. OTHER VEHICLE VISIBILITY/PATH VIEW LIMITATIONS (OSIDs)

| category | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-----------|--------------------|------------------------|------------------------|
| <u>Visibility Limitations</u> | | | | |
| None | 0. | 687 | 76.3 | 98.3 |
| Fog | 2. | 1 | 0.1 | 0.1 |
| Smoke | 3. | 1 | 0.1 | 0.1 |
| Glare | 5. | 10 | 1.1 | 1.4 |
| Unknown | 8. | 1 | 0.1 | Missing |
| Not Applicable | 9. | 200 | 22.2 | Missing |
| | TOTAL | 900. | 100.0 | 100.0 |
| <u>Visual Obstruction of OV Path View</u> | | | | |
| None | 0. | 465 | 51.7 | 67.8 |
| Yes | 1. | 221 | 24.6 | 32.2 |
| Not Applicable | 9. | 214 | 23.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 5.15.6. OTHER VEHICLE MOBILE VIEW OBSTRUCTIONS BY STATIONARY VIEW OBSTRUCTIONS (OSIDs)

| Stationary View Obstructions | | | | | | | | | | | |
|------------------------------|--|------|-----------|-------|------------|------------------|------|-------|--------------------|-------|--------------|
| Mobile View Obstruction | Count Row Pct Col Pct Tot Pct | None | Buildings | Signs | Vegetation | Walls, Fences | Hill | Curve | Parked Vehicles | Other | Row Total |
| | | | | | | | | | | | |
| None | 473 | 11 | 2 | 19 | 8 | 6 | 3 | 62 | 1 | 585 | |
| | 80.9 | 1.9 | 0.3 | 3.2 | 1.4 | 1.0 | 0.5 | 10.6 | 0.2 | 85.7 | |
| | 86.5 | 68.8 | 50.0 | 95.0 | 100.0 | 100.0 | 75.0 | 80.5 | 100.0 | | |
| | 69.3 | 1.6 | 0.3 | 2.8 | 1.2 | 0.9 | 0.4 | 9.1 | 0.1 | | |
| Vehicles | 73 | 5 | 2 | 1 | 0 | 0 | 1 | 15 | 0 | 97 | |
| | 73.3 | 5.2 | 2.1 | 1.0 | 0.0 | 0.0 | 1.0 | 15.5 | 0.0 | 14.2 | |
| | 13.3 | 31.3 | 50.0 | 5.0 | 0.0 | 0.0 | 25.0 | 19.5 | 0.0 | | |
| | 10.7 | 0.7 | 0.3 | 0.1 | 0.0 | 0.0 | 0.1 | 2.2 | 0.0 | | |
| Construction | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 547 | 16 | 4 | 20 | 8 | 6 | 4 | 77 | 1 | 683 | |
| | 80.1 | 2.3 | 0.6 | 2.9 | 1.2 | 0.9 | 0.6 | 11.3 | 0.1 | 100.0 | |

TABLE 5.15.7. MOTORCYCLE-OTHER VEHICLE PRECRASH VIEW OBSTRUCTION (OSIDs)

| Category | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 446 | 49.6 | 65.3 |
| MC Path Only | 1. | 17 | 1.9 | 2.5 |
| OV Path Only | 2. | 57 | 6.3 | 8.3 |
| MC & OV Paths | 3. | 163 | 18.1 | 23.9 |
| N.A., No OV | 9. | 217 | 24.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

5.16 Animal Involvement

Of the 900 on-scene, in-depth accident cases, there were 10 cases, or **1.2%**, involving animals. **The** animals involved were two small dogs, seven big dogs, and one cat. **Three** of the big dogs were pursuing the motorcycle rider, and eight cases involved the motorcycle making crash contact with the animal. **The** highest injury severity to the rider in animal-involved accidents was **AIS-5**. **The** data are **shown** in Table 5.16.1.

TABLE 5.16.1. ANIMAL INVOLVEMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-------|--------------------|------------------------|------------------------|
| <u>Type</u> | | | | |
| Small Dog | 1. | 2 | 0.2 | 20.0 |
| Large Dog | 2. | 7 | 0.7 | 70.0 |
| cat | 3. | 1 | 0.1 | 10.0 |
| N.A. | 9. | 890 | 98.9 | Missing |
| | TOTAL | | 100.0 | 100.0 |
| <u>Was Animal Pursuing Motorcycle?</u> | | | | |
| Yes | 1. | 3 | 0.3 | 30.0 |
| NO | 2. | 7 | 0.8 | 70.0 |
| N.A. | 9. | 890 | 98.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Was Animal Struck by Motorcycle?</u> | | | | |
| Yes | 1. | 8 | 0.9 | 80.0 |
| NO | 2. | 2 | 0.2 | 20.0 |
| N.A. | 9. | 890 | 98.9 | Missing |
| | TOTAL | | 100.0 | 100.0 |

5.17 Conspicuity

The pre-crash conspicuity of the motorcycle was evaluated along the pre-crash line-of-sight of the driver of the other vehicle, for the ambient light and background-conditions. For examples of the category labels, "outstanding" would be characterized by the motorcycle headlamp on (within the 11 to 1 o'clock sector), color contrast for the fairing or upper torso garment, contrast with the background, ambient light falling on the sighted **surfaces**; "inconspicuous" would be characterized by no headlamp on, no color contrast for fairing or upper torso garment, no contrast **with** the background surfaces. A police motorcycle with headlamp on and red lights flashing could be "outstanding" and a small motorcycle, headlamp off, rider wearing a surplus army jacket, in the shade, could be "**inconspicuous**". Table 5.17.1 shows a compilation of those conspicuity evaluations for the motorcycle, and the other vehicle involved in the accident.

TABLE 5.17.1. PRR-CRASH CONSPICUITY (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------------|-------|--------------------|------------------------|------------------------|
| <u>Motorcycle</u> | | | | |
| Outstanding | 1. | 34 | 3.8 | 5.0 |
| Average | 2. | 334 | 37.1 | 49.0 |
| 'LO" Conspicuity | 3. | 281 | 31.2 | 41.3 |
| Inconspicuous | 4. | 32 | 3.6 | 4.7 |
| Not Observed | 8. | 5 | 0.6 | Missing |
| Not Applicable | 9. | 214 | 23.8 | Hissing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Other Vehicle</u> | | | | |
| Outstanding | 1. | 239 | 26.6 | 34.7 |
| Average | 2. | 413 | 45.9 | 60.0 |
| LO" conspicuity | 3. | 31 | 3.4 | 4.5 |
| Inconspicuous | 4. | 5 | 0.6 | 0.7 |
| Not Observed | 8. | 5 | 0.6 | Missing |
| Not Applicable | 9. | 207 | 23.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Only the contrast aspect of conspicuity was evaluated because the immediate **precrash** conditions eliminate the angular motion aspect. Thus, the evaluations of conspicuity in Table 5.17.1 relate **only** the contrast of the rider-motorcycle configuration with the ambient light and background. No relative motion within that ambient field is considered as contributing to the conspicuity evaluation.

The motorcycle conspicuity in pre-crash conditions was low, or "as completely inconspicuous in 46.0% of those accidents where conspicuity was critical, e.g., other vehicle violation of the motorcycle right-of-way.

The conspicuity problem for motorcycles in traffic is in some ways simple and in other ways **very** complex. For example, only two of the accident involved motorcycle riders were "earing high visibility upper torso garments, e.g., a bright yellow Yamaha jacket. One of the riders was alcohol-involved and the other "as driving in an obscure location traffic. On the other hand, the more typical rider with a low level of conspicuity would be "earing an army surplus, olive-drab jacket, the unintentional but effective camouflage.

Table 5.17.2 shows the use of very high or **very** low visibility upper torso garments by the **motorcycle** rider. The high visibility yellow **or** orange jacket "as encountered 0.2% of those cases but the low visibility army surplus olive drab jacket "as encountered 3.6% of those cases.

TABLE 5.17.2. MOTORCYCLE RIDER HI/LO VISIBILITY UPPER TORSO GARMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-----------|--------------------|------------------------|------------------------|
| Not Remarkable | 1. | 854 | 94.9 | 96.2 |
| Very High Contrast | 2. | 2 | 0.2 | 0.2 |
| very LO" Contrast | 3. | 32 | 3.6 | 3.6 |
| Unknown | a. | 12 | 1.3 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The complexity of the conspicuity problem is illustrated by those cases where the motorcycle conspicuity "as average, or outstanding. Such a case could be a law enforcement motorcycle in pursuit of a traffic violator. The motorcycle has the headlamp and flashing red lights on, and is slowed to approximately 35 mph going through an intersection. Just past the intersection, an automobile driver pulls out from a driveway into the path of the **motorcycle**. The motorcycle rider says "the automobile driver looked right at me and I thought we had eye contact". The automobile driver "as not alcohol involved or otherwise impaired, or aggressively oriented. Similar situations appeared so often in the data collection that it is clear that high contrast conspicuity alone will not guarantee detection by the automobile driver. The motorcycle rider must not accept apparent eye contact as some significant **communication**, relating that the automobile driver has detected his presence in traffic.

The motorcycle conspicuity problem is serious. The violation of the motorcycle right-of-way by the other vehicle accounted for 64.7% of the multiple vehicle accidents. The failure of the other driver to "**see**" the motorcycle is the overwhelming part of these accidents. Any malicious and deliberate action of the other driver to "attack" the motorcycle rider is negligible in comparison to those fundamental detection failures; only two

of the 900 on-scene, in-depth cases involved an aggressive, malicious attack on the motorcycle rider **and** both were husband-wife disputes.

The contribution of the headlamp-on in daytime is described in detail in sections 6.11 and 114.

6.0 VEHICLE FACTORS

This section of the accident data shows the factors related to the vehicle involved in the accident. The motorcycle and automobile were examined for all mechanical factors related to the precrash and crash events. Of course, the motorcycle was correctly identified for type, size, manufacturer, modifications, etc., then examined for precrash and crash damage. The collision damage to the motorcycle and automobile, and the trajectories of the vehicles and occupants allowed the accident to be completely reconstructed so that collision contacts were defined, precrash lines-of-sight were analyzed, and precrash and crash speeds were determined. All mechanical elements were evaluated so that the effects of vehicle components and modifications could be determined; did crash bars help, did side stands ground out, did tire failure contribute to accident causation, where are the hazards, etc.?

6.1 Motorcycle Size and Type

Table 6.1.1 shows the motorcycle engine displacement for the 900 on-scene, in-depth (OSID) accident investigation cases. Table 6.1.2 shows the motorcycle engine displacement for the 3600 cases analyzed from police traffic accident reports (TAR). The motorcycle engine displacements were not noted in a large number of the traffic accident report cases (>40%) because that element was not required data on any law enforcement jurisdiction report form. Also, most police traffic accident investigators are not particularly familiar with motorcycle equipment, unless they happen to be motorcyclists themselves.

Table 6.1.3 shows the motorcycle engine displacement for the 54 fatal accidents of the 900 on-scene, in-depth accident investigations. Note that the large motorcycles (750cc and above) represent approximately one-third of all the accidents but are involved in approximately one-half of these fatal accidents.

Table 6.1.4 shows the motorcycle type for the 900 on-scene, in-depth accident cases, and those fatal accidents in that group (54). Of course, the majority of those motorcycles are conventional street motorcycles, essentially as manufactured but often with minor modifications. Genuine off-road motorcycles (dirt bikes) are not street legal because they are not equipped with lights, license, horn, muffler, street tires, etc., but they do participate in traffic accidents. Enduro, or dual purpose design motorcycles, encountered in these accidents were being used mainly as street bikes. The semi-chopper was the motorcycle modified with extended front forks, pull-back handlebars, and perhaps custom seat and "Harley" rear wheel. The semi-chopper and chopper were distinguished because of the potential for different collision avoidance handling or crashworthiness characteristics. Cafe racers were noted separately also because of these same differences.

Table 6.1.5 shows the engine type and number of cylinders for the motorcycles in the 900 on-scene, in-depth accident cases. Of course, no similar information was available from the traffic accident reports.

One particular feature available from all of the accident cases analyzed from the 3600 traffic accident reports was the distinction of the motorcycle rider and owner. Table 6.1.6 shows that 21.8% of the motorcycles were being ridden by a

TABLE 6.1.1. MOTORCYCLE MODEL SIZE OR **ENGINE** DISPLACEMENT (OSIDSs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------------|--------------------|------------------------|------------------------|--------------------------|
| Engine Displacement, cc. | 49. | 3 | 0.3 | 0.3 | 0.3 |
| | 50. | 12 | 1.3 | 1.3 | 1.7 |
| | 60. | 3 | 0.3 | 0.3 | 2.0 |
| | 70. | 7 | 0.8 | 0.8 | 2.8 |
| | 73. | 1 | 0.1 | 0.1 | 2.9 |
| | 75. | 3 | 0.3 | 0.3 | 3.2 |
| | 80. | 7 | 0.8 | 0.8 | 4.0 |
| | 83. | 1 | 0.1 | 0.1 | 4.1 |
| | 90. | 22 | 2.4 | 2.4 | 6.6 |
| | 100. | 24 | 2.7 | 2.7 | 9.2 |
| | 120. | 1 | 0.1 | 0.1 | 9.3 |
| | 125. | 35 | 3.9 | 3.9 | 13.2 |
| | 127. | 1 | 0.1 | 0.1 | 13.3 |
| | 150. | 4 | 0.4 | 0.4 | 13.8 |
| | 160. | 2 | 0.2 | 0.2 | 14.0 |
| | 175. | 31 | 3.4 | 3.4 | 17.5 |
| | 180. | 1 | 0.1 | 0.1 | 17.6 |
| | 185. | 2 | 0.2 | 0.2 | 17.8 |
| | 200. | 10 | 1.1 | 1.1 | 18.9 |
| | 250. | 33 | 3.7 | 3.7 | 22.6 |
| | 305. | 11 | 1.2 | 1.2 | 23.8 |
| | 350. | 127 | 14.1 | 14.1 | 37.9 |
| | 360. | 37 | 4.1 | 4.1 | 42.0 |
| | 380. | 7 | 0.8 | 0.8 | 42.8 |
| | 400. | 52 | 5.8 | 5.8 | 48.6 |
| | 450. | 31 | 3.4 | 3.4 | 52.1 |
| | 500. | 62 | 6.9 | 6.9 | 59.0 |
| | 550. | 38 | 4.2 | 4.2 | 63.2 |
| | 600. | 4 | 0.4 | 0.4 | 63.6 |
| | 650. | 29 | 3.2 | 3.2 | 66.9 |
| | 750. | 157 | 17.4 | 17.5 | 84.3 |
| 800. | 1 | 0.1 | 0.1 | 84.4 | |
| 850. | 9 | 1.0 | 1.0 | 85.4 | |
| 900. | 33 | 3.7 | 3.7 | 89.1 | |
| 1000. | 31 | 3.4 | 3.4 | 92.5 | |
| 1200. | 67 | 7.4 | 7.5 | 100.0 | |
| Unknown | 9998. | 1 | 0.1 | Missing | |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 6.1.2. MOTORCYCLE MODEL SIZE OR ENGINE DISPLACEMENT (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Engine Displacement. cc. | 40. | 1 | 0.0 | 0.0 | 0.0 |
| | 50. | 12 | 0.3 | 0.6 | 0.6 |
| | 60. | 3 | 0.1 | 0.1 | 0.7 |
| | 65. | 1 | 0.0 | 0.0 | 0.8 |
| | 70. | 16 | 0.4 | 0.7 | 1.5 |
| | 72. | 1 | 0.0 | 0.0 | 1.6 |
| | 73. | 1 | 0.0 | 0.0 | 1.6 |
| | 74. | 1 | 0.0 | 0.0 | 1.7 |
| | 75. | 7 | 0.2 | 0.3 | 2.0 |
| | 80. | 17 | 0.5 | 0.8 | 2.8 |
| | 90. | 54 | 1.5 | 2.5 | 5.3 |
| | 100. | 58 | 1.6 | 2.7 | 8.0 |
| | 120. | 2 | 0.1 | 0.1 | 8.1 |
| | 125. | 102 | 2.8 | 4.8 | 12.9 |
| | 150. | 5 | 0.1 | 0.2 | 13.1 |
| | 160. | 5 | 0.1 | 0.2 | 13.4 |
| | 165. | 1 | 0.0 | 0.0 | 13.4 |
| | 170. | 1 | 0.0 | 0.0 | 13.5 |
| | 175. | 98 | 2.7 | 4.6 | 18.0 |
| | 180. | 3 | 0.1 | 0.1 | 18.2 |
| | 185. | 10 | 0.3 | 0.5 | 18.6 |
| | 190. | 1 | 0.0 | 0.0 | 18.7 |
| | 200. | 20 | 0.6 | 0.9 | 19.6 |
| | 210. | 1 | 0.0 | 0.0 | 19.7 |
| | 220. | 6 | 0.2 | 0.3 | 19.9 |
| | 250. | 109 | 3.0 | 5.1 | 25.0 |
| | 300. | 4 | 0.1 | 0.2 | 25.2 |
| | 305. | 21 | 0.6 | 1.0 | 25.2 |
| | 350. | 414 | 11.5 | 19.3 | 45.5 |
| | 360. | 95 | 2.6 | 4.4 | 50.0 |
| | 380. | 6 | 0.2 | 0.3 | 50.3 |
| | 400. | 123 | 3.4 | 5.7 | 56.0 |
| | 450. | 88 | 2.4 | 4.1 | 60.1 |
| | 500. | 114 | 3.2 | 5.3 | 65.4 |
| | 550. | 62 | 2.3 | 3.8 | 69.3 |
| | 600. | 3 | 0.1 | 0.1 | 69.4 |
| 650. | 65 | 1.8 | 3.0 | 72.4 | |
| 750. | 384 | 10.7 | 17.9 | 90.4 | |
| 755. | 1 | 0.0 | 0.0 | 90.4 | |
| 850. | 27 | 0.7 | 1.3 | 91.7 | |
| 860. | 1 | 0.3 | 0.0 | 91.7 | |
| 866. | 1 | 0.0 | 0.0 | 91.8 | |
| 900. | 68 | 1.9 | 3.2 | 95.0 | |
| 1000. | 45 | 1.2 | 2.1 | 97.1 | |
| 1200. | 61 | 1.7 | 2.8 | 99.9 | |
| 1600. | 1 | 0.0 | 0.0 | 100.0 | |
| 2400. | 1 | 0.0 | 0.0 | 100.0 | |
| Unknown | 9998. | 1459 | 40.5 | Missing | |
| | TOTAL | 3600 | 100.0 | 100.0 | |

TABLE 6.1.3. MOTORCYCLE MODEL SIZE OR ENGINE DISPLACEMENT
(FATAL OSIDs ONLY)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Engine Displacement, cc. | 80. | 1 | 1.9 | 1.9 | 1.9 |
| | 90. | 1 | 1.9 | 1.9 | 3.7 |
| | 175. | 3 | 5.6 | 5.6 | 9.3 |
| | 250. | 1 | 1.9 | 1.9 | 11.1 |
| | 350. | 4 | 7.4 | 7.4 | 18.5 |
| | 360. | 4 | 7.4 | 7.4 | 25.9 |
| | 380. | 1 | 1.9 | 1.9 | 27.8 |
| | 400. | 2 | 3.7 | 3.7 | 31.5 |
| | 450. | 2 | 3.7 | 3.7 | 35.2 |
| | 500. | 5 | 9.3 | 9.3 | 44.4 |
| | 550. | 2 | 3.7 | 3.7 | 48.1 |
| | 650. | 1 | 1.9 | 1.9 | 50.0 |
| | 750. | 17 | 31.5 | 31.5 | 81.5 |
| | 900. | 1 | 1.9 | 1.9 | 83.3 |
| | 1000. | 2 | 3.7 | 3.7 | 87.0 |
| 1200. | 7 | 13.0 | 13.0 | 100.0 | |
| TOTAL | | 54 | 100.0 | 100.0 | 100.0 |

TABLE 6.1.4. TYPE OF MOTORCYCLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|--|-------|--------------------|------------------------|
| <u>All OSIDs</u> | | | |
| Street OEM* | 1. | 623 | 69.2 |
| Dirt Bike | 2. | 14 | 1.6 |
| Enduro | 3. | 100 | 11.1 |
| Semi-Chopper | 4. | 64 | 7.1 |
| Chopper | 5. | 49 | 5.4 |
| Cafe Racer | 6. | 28 | 3.1 |
| Other | | 22 | 2.4 |
| | TOTAL | 900 | 100.0 |
| <u>Fatal OSIDs</u> | | | |
| street OEM* | 1. | 36 | 66.7 |
| Dirt Bike | 2. | 2 | 3.7 |
| Enduro | 3. | 6 | 11.1 |
| Semi-Chopper | 4. | 4 | 7.4 |
| Chopper | 5. | 3 | 5.6 |
| Cafe Racer | 6. | 3 | 5.6 |
| | TOTAL | 54 | 100.0 |
| *OEM refers to Original Equipment Manufacturer | | | |

TABLE 6.1.5. MOTORCYCLE ENGINE CHARACTERISTICS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------|------|--------------------|------------------------|------------------------|
| <u>Number of Cylinders</u> | | | | |
| One | 1. | 180 | 20.0 | 20.0 |
| Two | 2. | 424 | 47.1 | 47.2 |
| Three | 3. | 33 | 3.7 | 3.7 |
| Four | 4. | 262 | 29.1 | 29.1 |
| Unknown | 8. | 1 | 0.1 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| <u>Type of Engine</u> | | | | |
| 4-cycle | 1. | | | |
| ?-cycle | 2. | 722 | 80.2 | 80.2 |
| | | 178 | 19.8 | 19.8 |
| TOTAL | | 900 | 100.0 | 100.0 |

TABLE 6.1.6. MOTORCYCLE RIDER SURNAME SAME AS OWNER (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|------|--------------------|------------------------|------------------------|
| Yes | 1. | 2642 | 73.4 | 78.2 |
| NO | 2. | 736 | 20.4 | 21.8 |
| Unknown | 8. | 222 | 6.2 | Missing |
| TOTAL | | 3600 | 100.0 | 100.0 |

person with a surname different from the registered **owner**. A special investigation of the cases showed that at least half of these cases were delays in the legal change of ownership. The other half was attributable to a variety of reasons with stolen motorcycles representing less than half a percent of those accident cases.

6.2 Manufacturer of the Accident-Involved Motorcycle

Table 6.2.1 shows the manufacturer of the motorcycles for the 900 on-scene, in-depth cases.

Table 6.2.2 shows the manufacturer of the motorcycles for the 3600 **cases** analyzed from police traffic accident **reports**.

In general, the distributions in these two sets of data agree.

TABLE 6.2.1. MOTORCYCLE MANUFACTURER (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|------------|--------------------|------------------------|------------------------|
| BMW | 3. | 14 | 1.6 | 1.6 |
| BSA | 4. | 8 | 0.9 | 0.9 |
| Bultaco | 6. | 1 | 0.1 | 0.1 |
| CZ | 8. | 2 | 0.2 | 0.2 |
| CAT-HPE | 9. | 1 | 0.1 | 0.1 |
| Ducati | 14. | 2 | 0.2 | 0.2 |
| Barley-Davidson | 20. | 95 | 10.6 | 10.6 |
| Honda | 23. | 501 | 55.7 | 55.7 |
| Indian | 25. | 1 | 0.1 | 0.1 |
| Jawa | 26. | 3 | 0.3 | 0.3 |
| Kawasaki | 28. | 73 | 8.1 | 8.1 |
| Moto Guzzi | 35. | 7 | 0.8 | 0.8 |
| Norton | 40. | 6 | 0.7 | 0.7 |
| Puch | 44. | 1 | 0.1 | 0.1 |
| Riverside | 46. | 1 | 0.1 | 0.1 |
| Sachs | 50. | 2 | 0.2 | 0.2 |
| Sears-Allstate | 51. | 1 | 0.1 | 0.1 |
| Suzuki | 54. | 40 | 4.4 | 4.4 |
| Triumph | 55. | 18 | 2.0 | 2.0 |
| Vespa | 60. | 7 | 0.8 | 0.8 |
| Yamaha | 62. | 110 | 12.2 | 12.2 |
| Others | 65. | 6 | 0.7 | 0.7 |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 6.2.3 shows the manufacturer of the motorcycles involved in the 54 fatal accident cases studied. Of course, those manufacturers of those **more** numerous or larger displacement motorcycles show the higher representation.

6.3 Year of Manufacture, or Model Year

Table 6.3.1 shows the year of manufacture, or **equivalent** model year, for the 900 on-scene, in-depth accident Investigation cases.

Table 6.3.2 shows the year of manufacture, or equivalent model year, for the 3600 police traffic accident report cases.

6.4 Predominating Color of the Motorcycle

Table 6.4.1 shows the motorcycle colors from the 900 in-depth accident investigation cases.

Table 6.4.2 shows the same information collected from the analysis of the 3600 police traffic accident reports.

TABLE 6.2.2. MOTORCYCLE MANUFACTURER (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| BMW | 3. | 45 | 1.2 | 1.3 |
| BSA | 4. | 26 | 0.7 | 0.7 |
| Bridgestone | 5. | 1 | 0.0 | 0.0 |
| Bultaco | 6. | 4 | 0.1 | 0.1 |
| Benelli | 7. | 3 | 0.1 | 0.1 |
| CZ | a. | 2 | 0.1 | 0.1 |
| Cushman | 11. | 9 | 0.2 | 0.3 |
| Ducati | 14. | 5 | 0.1 | 0.1 |
| Eagle | 15. | 1 | 0.0 | 0.0 |
| Gemini | 17. | 1 | 0.0 | 0.0 |
| Harley-Davidson | 20. | 321 | 8.9 | 9.1 |
| Hodaka | 22. | 4 | 0.1 | 0.1 |
| Honda | 23. | 1872 | 52.0 | 53.0 |
| Indian | 25. | 7 | 0.2 | 0.2 |
| Jawa | 26. | 8 | 0.2 | 0.2 |
| KTM | 27. | 2 | 0.1 | 0.1 |
| Kawasaki | 28. | 329 | 9.1 | 9.3 |
| Moto Guzzi | 35. | 39 | 1.1 | 1.1 |
| Norton | 40. | 30 | 0.8 | 0.8 |
| Rickman | 45. | 1 | 0.0 | 0.0 |
| Riverside | 46. | 1 | 0.0 | 0.0 |
| Sachs | 50. | 1 | 0.0 | 0.0 |
| Suzuki | 54. | 155 | 4.3 | 4.4 |
| Triumph | 55. | 122 | 3.4 | 3.5 |
| Vespa | 60. | 18 | 0.5 | 0.5 |
| Yamaha | 62. | 482 | 13.4 | 13.7 |
| Zundapp | 64. | 1 | 0.0 | 0.0 |
| Other | 65. | 41 | 1.1 | 1.2 |
| Unknown | 98. | 69 | 1.9 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 6.2.3. MOTORCYCLE MANUFACTURER (OSID FATALS)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|-------|--------------------|------------------------|------------------------|
| BMW | 3. | 2 | 3.7 | 3.7 |
| Parley-Davidson | 20. | a | 14.8 | 14.8 |
| Honda | 23. | 31 | 57.4 | 57.4 |
| Indian | 25. | 1 | 1.9 | 1.9 |
| Kawasaki | 28. | 2 | 3.7 | 3.7 |
| Suzuki | 54. | 2 | 3.7 | 3.7 |
| Triumph | 55. | 1 | 1.9 | 1.9 |
| Yamaha | 62. | 7 | 13.0 | 13.0 |
| | TOTAL | 54 | 100.0 | 100.0 |

TABLE 6.3.1. MOTORCYCLE YEAR OF MANUFACTURE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|------------|--------------------|------------------------|------------------------|
| Year, 19__ | 37. | 2 | 0.2 | 0.2 |
| | 40. | 1 | 0.1 | 0.1 |
| | 47. | 3 | 0.3 | 0.3 |
| | 48. | 2 | 0.2 | 0.2 |
| | 49. | 1 | 0.1 | 0.1 |
| | 51. | 2 | 0.2 | 0.2 |
| | 52. | 3 | 0.3 | 0.3 |
| | 56. | 1 | 0.1 | 0.1 |
| | 58. | 3 | 0.3 | 0.3 |
| | 59. | 2 | 0.2 | 0.2 |
| | 60. | 2 | 0.2 | 0.2 |
| | 62. | 2 | 0.2 | 0.2 |
| | 63. | 4 | 0.4 | 0.5 |
| | 64. | 5 | 0.6 | 0.6 |
| | 65. | 11 | 1.2 | 1.2 |
| | 66. | 17 | 1.9 | 1.9 |
| | 67. | 14 | 1.6 | 1.6 |
| | 68. | 21 | 2.3 | 2.4 |
| | 69. | 35 | 3.9 | 3.9 |
| | 70. | 56 | 6.2 | 6.3 |
| | 71. | 80 | 8.9 | 9.0 |
| | 72. | 112 | 12.4 | 12.6 |
| | 73. | 93 | 10.3 | 10.5 |
| | 74. | 110 | 12.2 | 12.4 |
| | 75. | 157 | 17.4 | 17.7 |
| | 76. | 96 | 10.7 | 10.8 |
| | 77. | 49 | 5.4 | 5.5 |
| 78. | 3 | 0.3 | 0.3 | |
| Unknown | 98. | 13 | 1.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 6.3.2. MOTORCYCLE YEAR OF MANUFACTURE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Year, 19__ | 27. | 1 | 0.0 | 0.0 |
| | 37. | 1 | 0.0 | 0.0 |
| | 39. | 1 | 0.0 | 0.0 |
| | 40. | 1 | 0.0 | 0.0 |
| | 41. | 3 | 0.1 | 0.1 |
| | 42. | 2 | 0.1 | 0.1 |
| | 45. | 1 | 0.0 | 0.0 |
| | 46. | 4 | 0.1 | 0.1 |
| | 47. | 4 | 0.1 | 0.1 |
| | 48. | 4 | 0.1 | 0.1 |
| | 49. | 4 | 0.1 | 0.1 |
| | 50. | 6 | 0.2 | 0.2 |
| | 51. | 4 | 0.1 | 0.1 |
| | 52. | 5 | 0.1 | 0.1 |
| | 53. | 1 | 0.0 | 0.0 |
| | 54. | 3 | 0.1 | 0.1 |
| | 55. | 4 | 0.1 | 0.1 |
| | 56. | 9 | 0.2 | 0.3 |
| | 57. | 6 | 0.2 | 0.2 |
| | 58. | 5 | 0.1 | 0.1 |
| | 59. | 9 | 0.2 | 0.3 |
| | 60. | 7 | 0.2 | 0.2 |
| | 61. | 11 | 0.3 | 0.3 |
| | 62. | 6 | 0.2 | 0.2 |
| | 63. | 12 | 0.3 | 0.3 |
| | 64. | 26 | 0.7 | 0.7 |
| | 65. | 35 | 1.0 | 1.0 |
| | 66. | 57 | 1.6 | 1.6 |
| | 67. | 65 | 1.8 | 1.9 |
| | 68. | 83 | 2.3 | 2.4 |
| | 69. | 150 | 4.2 | 4.3 |
| | 70. | 246 | 6.8 | 7.1 |
| | 71. | 316 | 8.8 | 9.1 |
| 72. | 387 | 10.7 | 11.1 | |
| 73. | 425 | 11.8 | 12.2 | |
| 74. | 417 | 11.6 | 12.0 | |
| 75. | 694 | 19.3 | 20.0 | |
| 76. | 377 | 10.5 | 10.8 | |
| 77. | 83 | 2.3 | 2.4 | |
| Unknown | 98. | 125 | 3.5 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 6.4.1. MOTORCYCLE PREDOMINATING COLOR (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-------|--------------------|------------------------|------------------------|
| White | 1. | 44 | 4.9 | 4.9 |
| Yellow | 2. | 44 | 4.9 | 4.9 |
| Orange | 3. | 93 | 10.3 | 10.4 |
| Black | 4. | 109 | 12.1 | 12.1 |
| Brown | 5. | 70 | 7.8 | 7.8 |
| Blue | 6. | 163 | 18.1 | 18.2 |
| Red | 7. | 199 | 22.1 | 22.2 |
| Purple | 8. | 32 | 3.6 | 3.6 |
| Green | 9. | 66 | 7.3 | 7.3 |
| Silver | 10. | 23 | 2.6 | 2.6 |
| Gold | 11. | 42 | 4.7 | 4.7 |
| Metal Flake/Chrome | 12. | 3 | 0.3 | 0.3 |
| Other | 13. | 10 | 1.1 | 1.1 |
| Unknown | 98. | 2 | 0.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 6.4.2. MOTORCYCLE PREDOMINATING COLOR (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-------|--------------------|------------------------|------------------------|
| White | 1. | 93 | 2.6 | 2.8 |
| Yellow | 2. | 168 | 4.7 | 5.0 |
| Orange | 3. | 259 | 7.2 | 7.3 |
| Black | 4. | 563 | 15.6 | 16.9 |
| Brown | 5. | 223 | 6.2 | 6.7 |
| Blue | 6. | 577 | 16.0 | 17.3 |
| Red | 7. | 746 | 20.7 | 22.4 |
| Purple | 8. | 73 | 2.0 | 2.2 |
| Green | 9. | 295 | 8.2 | 8.8 |
| Silver | 10. | 37 | 1.0 | 1.1 |
| Grey | 11. | 62 | 1.7 | 1.9 |
| Gold | 12. | 145 | 4.0 | 4.3 |
| Chrome-Metal Flake | 13. | 2 | 0.1 | 0.1 |
| Others | 14. | 93 | 2.6 | 2.8 |
| Unknown | 98. | 264 | 7.3 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

The data relate that the darker colors are present in accidents; the sum of black, blue, brown, purple, and green represent at least half of the motorcycles.

6.5 Collision Contact on the Motorcycle

Figure 6.5.1 shows the collision contact points for the 900 on-scene, in-depth accident cases. Because of the configuration of the typical motorcycle, there is a tendency for the collision contact to be located at the front wheel, fender, and forks. In 30.5% of those cases, the collision contact was at the very front tire and wheel, and another 31.4% (16.7 + 14.7) were at the right or left front of **motorcycle**. So the motorcycle accident has a collision contact configuration that is predominately frontal impact, 61.9% of all cases.

The initial collision contacts have a central side orientation in 31.9% of the collision cases (17.7 + 14.2).

Collision contact at the back of the motorcycle occurs in only 2.6% of those cases, and when the right and left back sides are included (1.5 + 2.1), the total involvement is only 6.2% of the accident cases. This low frequency of rear impacts is far below that of other types of motor vehicles and represents a low threat.

The higher involvement of the left side collision contact is due to the dominant accident configuration of the oncoming other vehicle turning left in front of the motorcycle.

6.6 Motorcycle Modifications

There were modifications to the motorcycles in the 900 on-scene, in-depth accident investigation **cases** as follows:

- 8.9% had extended fork tubes, 1.3% had extensions with slugs.
 - 8.2% had accessories, e.g., radios, tape, stereo, etc.
 - 6.3% had saddlebags.
 - 16.6% had luggage box or boot.
 - 30.1% had modified exhaust systems.
 - 4.1% had modified front wheel and tire.
 - 19.9% had modified rear wheel and tire.
 - 13.0% had modified rear suspension.
 - 18.1% had elevated foot rests or highway pegs.
 - 6.1% had modified triple clamps.
 - 5.6% had frame modifications.
 - 18.1% had crashbars.
 - 27.1% had sissybars (but sissybars had no significant injury association)
 - 24.6% had modified seats.
 - 6.1% had modified gas tanks.
 - 12.0% had windshields (with or without fairings)
 - 2.4% had frame-mounted fairings.
 - 6.3% had steering-mounted fairings.
- Only one motorcycle was equipped with a sidecar.

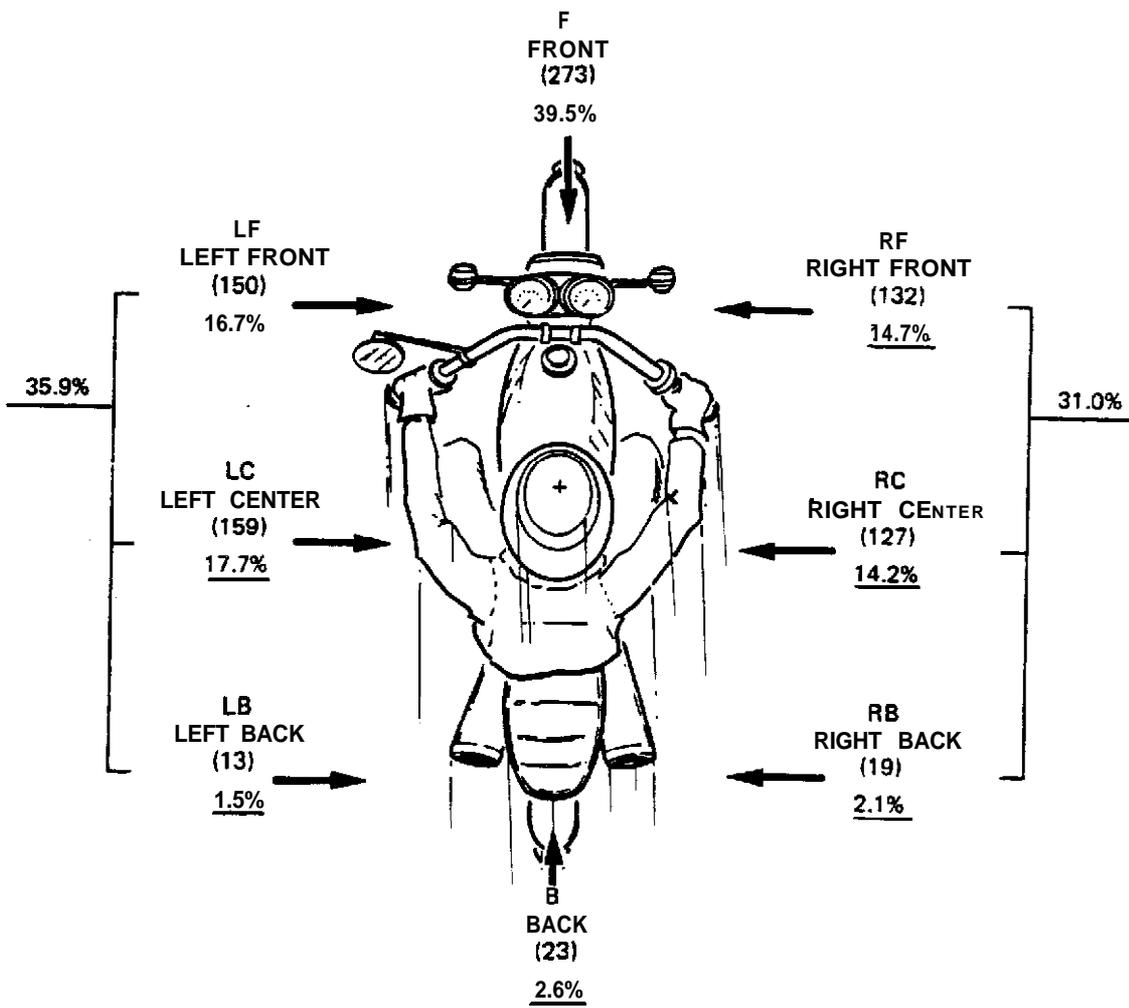


FIGURE 6.5.1. COLLISION CONTACT POINTS (OSIDs)

6.7 Fuel System Crashworthiness

Fuel Spills

Fuel spills (high flow stream) were present in 17.1% of the 900 on-scene, in-depth accident investigations; fuel leaks (low intermittent flow) occurred in 44.7% of the accidents. The total of 61.9% significant fuel spills or leaks represents a post-crash fire hazard far beyond the accident experience of other types or road vehicles. It is a typical post-crash posture of the motorcycle to be lying down on one side, far from the normal containment orientation of the fuel system. Consequently it is expected that some sort of fuel loss will occur.

The source of fuel spills and leaks is shown in Table 6.7.1. The fuel tank cap and carburetor vents dominate as a source of fuel spills and leaks. The motorcycle post-crash point of rest is reliably distinguished by the spill spots from the tank cap and carburetors. Also, the post-crash orientation of the motorcycle and movement in vehicle recovery can be distinguished in most accident cases where fuel spills occur.

TABLE 6.7.1. **FUEL LEAKAGE/SPILLAGE (OSIDs)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------------------|-------|--------------------|------------------------|------------------------|
| <u>Fuel Spillage</u> | | | | |
| Yes | 1. | 149 | 16.6 | 17.1 |
| No | 2. | 720 | 80.0 | 82.9 |
| Unknown | 8. | 31 | 3.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Fuel Leakage</u> | | | | |
| Yes | 1. | 385 | 42.8 | 44.7 |
| No | 2. | 477 | 53.0 | 55.3 |
| Unknown | 8. | 38 | 4.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Source of Fuel Spill or Leak</u> | | | | |
| Tank | 1. | 347 | 38.6 | 71.1 |
| Fuel Lines | 2. | 36 | 4.0 | 7.4 |
| Fuel Filter | 3. | 1 | 0.1 | 0.2 |
| Carburetor | 4. | 104 | 11.6 | 21.3 |
| Unknown | 8. | 55 | 6.1 | Missing |
| N.A. | 9. | 357 | 39.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Fuel Tank Crashworthiness

Retention: Table 6.7.2 shows that 3.2% of the 900 accident cases involved partial separation of the fuel tank from the motorcycle; 2.1% of the accidents resulted in complete separation of the tank from the motorcycle.

Deformation: Table 6.7.2 also shows 45.4% of the 900 cases involved no deformation or damage to the fuel tank; 36.8% suffered mild deformation, 13.1% suffered moderate deformation, and 4.7% experienced severe deformation of the tank. Severe deformation of the tank would be characterized by at least 1/3 reduction of the tank volume, and a high potential for fuel loss.

TABLE 6.7.2. FUEL TANK STATUS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| <u>Tank Retention</u> | | | | |
| Complete | 1. | 850 | 84.4 | 94.1 |
| Partial | 2. | 29 | 3.2 | 3.2 |
| Total Separation | 3. | 19 | 2.1 | 2.1 |
| Unknown | a. | 2 | 0.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Tank Deformation</u> | | | | |
| None | 0. | 408 | 45.3 | 45.3 |
| Mild | 1. | 331 | 36.8 | 36.8 |
| Moderate | 2. | 118 | 13.1 | 13.1 |
| Severe | 3. | 42 | 4.7 | 4.7 |
| Unknown | | 1 | 0.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Violation: Table 6.7.3 shows that 4.2% of the fuel tanks experienced intrusion or penetration of the tank volume so that a severe fuel loss would occur.

Tank Cap: Table 6.7.3 also shows that 3.7% of the fuel tank caps opened during the crash impact. The majority of those tank caps opening were forward-hinged flip-up type caps.

Fires

As shown in Table 6.7.4, crash **fires** occurred in 3 and post-crash fires occurred in 11 of the 900 on-scene, in-depth accident cases, i.e., 1.2% of the accidents. This frequency of fire **occurrence** is low when compared with the high availability of fuel from spills and leaks (61.9% of the accidents). The fuel tank cap opening was the predominating fuel source in these fires, and such a

TABLE 6.7.3. FUEL TANK VIOLATION AND CAP SECURITY (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------|------|--------------------|------------------------|------------------------|
| <u>Tank Violation</u> | | | | |
| None | 0. | 861 | 95.7 | 95.8 |
| Yes | 1. | 38 | 4.2 | 4.2 |
| Unknown | 8. | 1 | 0.1 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| <u>Cap Remain Secured?</u> | | | | |
| Yes | 1. | 859 | 95.3 | 96.3 |
| NO | 2. | 33 | 3.7 | 3.7 |
| Unknown | 8. | 8 | 0.9 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |

TABLE 6.7.4. FIRE OCCURRENCE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|------|--------------------|------------------------|------------------------|
| <u>Did Precrash Fire Occur?</u> | | | | |
| NO | 2. | 900 | 100.0 | 100.0 |
| TOTAL | | 900 | 100.0 | 100.0 |
| <u>Did Crash Fire Occur?</u> | | | | |
| Yes | 1. | 3 | 0.3 | 0.3 |
| | | | 99.7 | 99.7 |
| TOTAL | | | 100.0 | 100.0 |
| <u>Did Postcrash Fire Occur or Crash Fire Continue?</u> | | | | |
| Yes | 1. | 11 | 1.2 | 1.2 |
| NO | 2. | 889 | 98.8 | 98.8 |
| TOTAL | | 900 | 100.0 | 100.0 |

source would provide a high volume of fuel when ignition sources are available. The fuel and ignition sources are shown in Table 6.7.5.

TABLE 6.7.5. FUEL/IGNITION SOURCES (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------------|-------|--------------------|------------------------|------------------------|
| <u>Fuel Source for Fire</u> | | | | |
| Tank Cap Separation | 2. | 9 | 1.0 | 81.8 |
| Carburetor | 3. | 1 | 0.1 | 9.1 |
| Petcock | 5. | 1 | 0.1 | 9.1 |
| Not Applicable | 9. | 889 | 98.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Ignition Source</u> | | | | |
| Electrical System | 1. | 3 | 0.3 | 27.3 |
| Exposed Exhaust | 2. | 1 | 0.1 | 9.1 |
| Friction Sparks | 3. | 6 | 0.7 | 54.5 |
| Other | 4. | 1 | 0.1 | 9.1 |
| Not Applicable | 9. | 889 | 98.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The low occurrence of fires in the presence of high fuel availability (Table 6.7.1) is explained by the fact that the most **common** ignition **source** available is friction sparks from the sliding motorcycle. If the fuel concentration is low at the ignition source, there is no fire; if the fuel concentration is high only at the point of rest, the ignition source is depleted and there is no fire. As the motorcycle reaches the post-crash point of rest, the usual ignition sources are depleted and a **low volume** flow fuel source is not ignited.

6.8 Pre-Crash and Crash Speeds

Table 6.8.1 (Appendix C.2) shows the distribution of pre-crash speeds for the motorcycles involved in the 900 accident cases. The median speed is 29.8 miles per hour for all cases. The single and multiple vehicle collisions are presented separately.

Table 6.8.2 (Appendix C.2) shows the distributions of the crash speeds for the motorcycles in the 900 accident cases. The median speed is 21.5 miles per hour for all cases. The single and multiple precrash and crash speeds are summarized in Table 6.8.3, and these data show that the single vehicle accidents are characterized by generally more frequent high precrash and crash speeds.

TABLE 6.8.3. SUMMARY OF PRECRASH AND CRASH SPEEDS FOR SINGLE MULTIPLE VEHICLE COLLISIONS

| Preocrash Speeds | Single Vehicle Collisions (208) | Multiple Vehicle Collisions (661) | Unknown (31) |
|---------------------|---------------------------------|-----------------------------------|--------------|
| 0-10 mph | 17 (.082) | 46 (.070) | 2 |
| 11-20 | 23 (.111) | 77 (.116) | 4 |
| 21-30 | 47 (.226) | 238 (.360) | 12 |
| 31-40 | 42 (.202) | 221 (.334) | 6 |
| 41-50 | 36 (.173) | 59 (.089) | 5 |
| 51-60 | 22 (.106) | 14 (.021) | 2 |
| 61-70 | 14 (.067) | 1 (0) | 0 |
| 71-80 | 1 (.005) | 0 (0) | 0 |
| >80 | 2 (.010) | 0 (0) | 0 |
| Unknown | 4 (.019) | 5 (.007) | 0 |
| Crash Speeds | | | |
| 0-10 mph | 18 (.087) | 62 (.094) | 3 |
| 11-20 | 61 (.293) | 273 (.413) | 15 |
| 21-30 | 50 (.240) | 215 (.325) | 5 |
| 31-40 | 38 (.183) | 55 (.129) | 6 |
| 41-50 | 14 (.067) | 17 (.026) | 1 |
| 51-60 | 14 (.067) | 9 (.014) | 1 |
| 61-70 | 9 (.043) | 0 (0) | 0 |
| 71-80 | 2 (.010) | 0 (0) | 0 |
| >80 | 0 (0) | 0 (0) | 0 |
| Unknown | 2 (.010) | 0 (0) | 0 |

Each of the 900 cases was completely reconstructed analytically and the vehicle dynamics defined to determine the pre-crash and crash speeds. Vehicle damage analysis, post-crash trajectories, and skid and scuff marks were used to determine these speeds. No similar information was available from examination of the 3600 police traffic accident reports.

The distribution of the pre-crash and crash speeds is shown in Figure 6.8.4. Note the median speeds of 29.8 and 21.5 miles per hour, and the one-in-a-thousand crash speed is approximately 86 miles per hour.

6.9 Contributory Tire Conditions

Table 6.9.1 shows the frequencies of contributory tire conditions for the front and rear tires of the accident involved motorcycles examined for the on-scene, in-depth data collection. The greatest part of accident causation by vehicle failure (2.8%) was tire failure, primarily by puncture flats. All of those tires involved were tube-type and the deflation was usually sudden, causing immediate control distress.

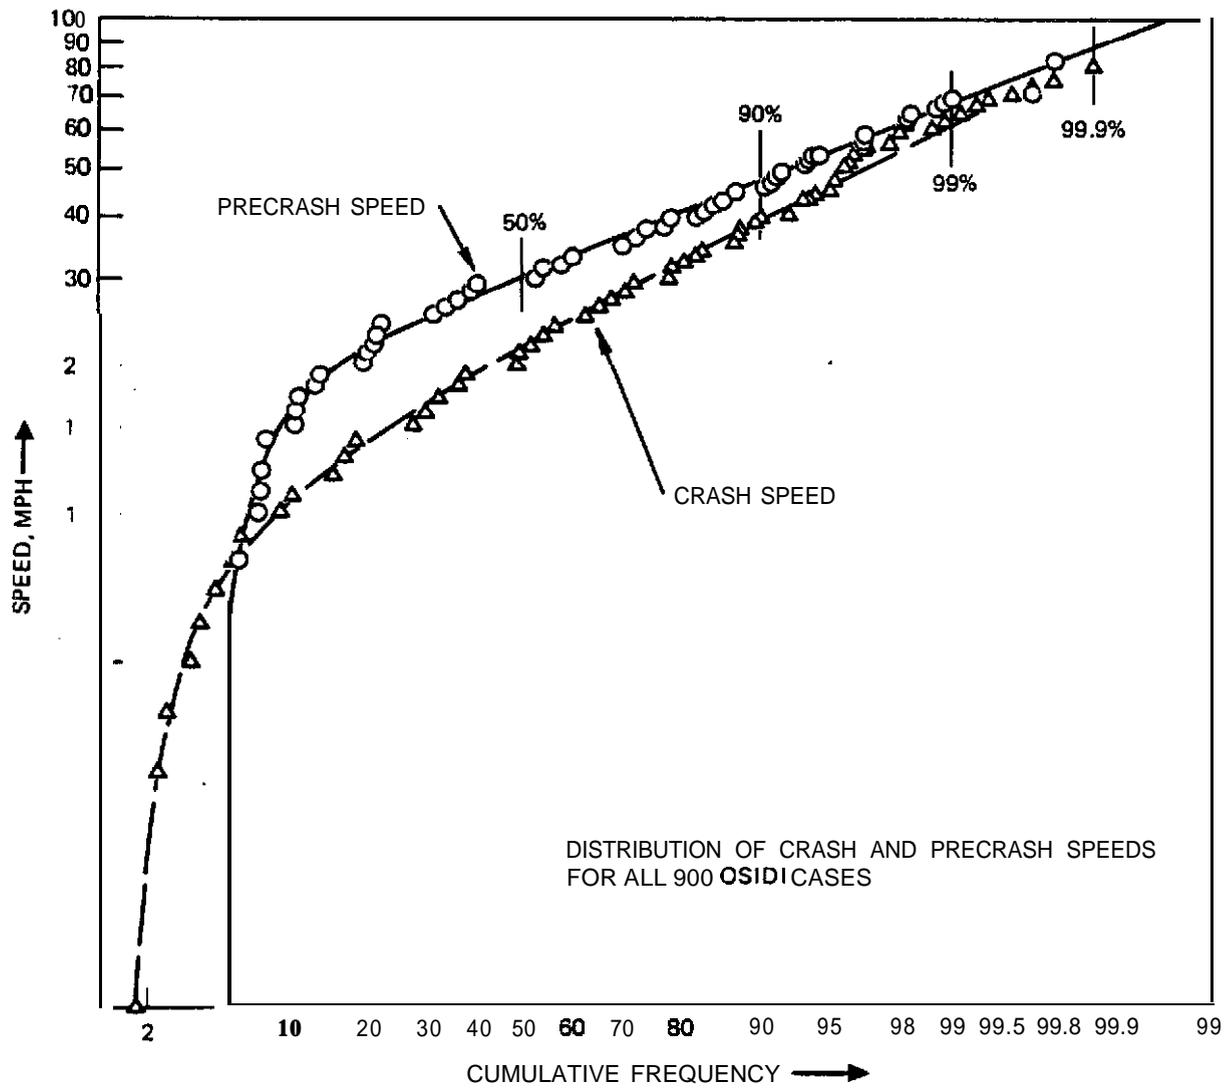


FIGURE 6.8.4. DISTRIBUTION OF CRASH AND PRECRASH SPEEDS FOR ALL 900 OSIDI CASES.

TABLE 6.9.1. CONTRIBUTORY TIRE CONDITIONS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| <u>Front Tire</u> | | | | |
| None | 0. | 859 | 95.4 | 95.6 |
| Puncture Flat | 1. | 2 | 0.2 | 0.1 |
| Worn Smooth | 3. | 4 | 0.4 | 0.4 |
| Low Pressure | 4. | 23 | 2.6 | 2.6 |
| High Pressure | 5. | 9 | 1.0 | 1.0 |
| Others | 7. | 2 | 0.2 | 0.2 |
| Unknown | a. | 1 | 0.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Rear Tire</u> | | | | |
| None | 0. | 837 | 93.0 | 93.0 |
| Puncture Flat | 1. | 12 | 1.3 | 1.2 |
| Worn Smooth | 3. | 11 | 1.2 | 1.2 |
| Low Pressure | 4. | 22 | 2.4 | 2.4 |
| High Pressure | 5. | 12 | 1.3 | 1.3 |
| Valve Failure | 6. | 1 | 0.1 | 0.1 |
| Others | 7. | 5 | 0.6 | 0.6 |
| | TOTAL | 900 | 100.0 | 100.0 |

Dynamic tire failure was not involved in the majority of puncture flats. In the majority of cases, loss of control occurred before the tire bead unseated, or the tire bead did not unseat at all. As a result, there is no obvious **requirement** for complicated wheel design or bead retention devices. The dynamic tire failure problem is of minor importance when compared to the major accident and injury causation problems of conspicuity, rider error, head protection, etc.

Tires worn smooth contributed reduced traction with contaminated roadway and were accounted for only when that reduced traction was involved in the accident events.

Tires with pressures excessively high or low could reduce braking or cornering ability. When those pressures **deviated more** than 30% from standard pressures, and that hard or soft tire contributed to the accident involvement, those data were so noted. As an example, one accident studied involved a semi-chopper 750cc motorcycle with a front tire inflated to 58 psi. Front brake application during collision avoidance action resulted in premature front wheel lock-up, slide-out and fall. This result was made more likely by this hard, over-inflated tire.

Approximately 6% of those vehicles examined had tires in poor or marginal **condition**, but there was no direct contribution to accident causation since out-right mechanical tire failure modes were not encountered.

Tables 6.9.2 (Appendix C.2) and 6.9.3 (Appendix C.2) illustrates the effect of the presence of a passenger on the contributory front and rear tire conditions. These data show the additional involvement of the passenger-carrying motorcycle experiencing puncture flat of the rear tire.

6.10 Cornering Clearance

Table 6.10.1 shows the frequencies of accident involved cornering clearance problems. The sidestand wee involved more then any other component, and three of these **cases** involved failure to retract the sidestand after starting off and entering traffic. **Each** of these three **cases** involved a significant attention problem involving the motorcycle rider (passenger, traffic, alcohol involvement) and one **case** of an unhelmeted rider resulted in fatal injuries.

TABLE 6.10.1. CORNERING CLEARANCE IF ACCIDENT-INVOLVED

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-------|--------------------|------------------------|------------------------|
| All OSIDs | | | | |
| Sidestand | 1. | 9 | 1.0 | 32.1 |
| Centerstand | 2. | 6 | 0.7 | 21.4 |
| Foot Pegs | 3. | 6 | 0.7 | 21.4 |
| Mufflers-Pipes | 5. | 2 | 0.2 | 7.1 |
| Crash Bars | 6. | 2 | 0.2 | 7.1 |
| Others | | 3 | 0.3 | 10.7 |
| Unknown | 8. | 1 | 0.1 | Missing |
| Not Applicable | 9. | 871 | 96.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Fatal OSIDs | | | | |
| Sidestand | 1. | 1 | 1.9 | 33.3 |
| Foot Pegs | 3. | 1 | 1.9 | 33.3 |
| Others | 6. | 1 | 1.9 | 33.3 |
| Not Applicable | 9. | 51 | 94.4 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 |

6.11 Pre-Crash Line-of-Sight

As a matter of the complete reconstruction of the accident dynamics, the pre-crash and crash speeds and directions were determined for the motorcycle and the other vehicle involved in each of the on-scene, in-depth accident cases. At that point in the accident events corresponding to the accident precipitating event, the line-of-sight from the motorcycle rider to the other vehicle **was determined** and recorded as a "clock face" direction. For example, consider the motorcycle approaching an intersection and an automobile in opposing traffic just

beginning to turn left in front of the motorcycle. In this case, the typical **pre-crash** line-of-sight **from** the motorcycle to **that** automobile would be **approximately** "eleven o'clock". It is important to distinguish this pre-crash line-of-sight from vehicle paths, or any other element of the pre-crash **or collision** dynamics.

The pre-crash line-of-sight relates several factors important in accident prevention. The principal application is in the detection of hazards by the motorcycle rider. The search and detection priorities are defined by the distribution of these hazards around the motorcycle rider. Also, the reciprocal of each **line-of-sight** defines that part of the motorcycle exposed to view by the driver of the other vehicle. For example, if the pre-crash line-of-sight to the left turning automobile is "eleven o'clock" then that front left side of the motorcycle is that surface most related to motorcycle conspicuity in that particular accident.

Table 6.11.1 shows the distribution for the pre-crash lines-of-sight for the 900 on-scene, in-depth accident cases. There were 716 of these accidents which involved another vehicle (or pedestrian, animal, etc.) and 184 which were single vehicle accidents with nothing involved but the motorcyclist. **Hence, no** data were recorded for those 184 single vehicle collisions. A special feature of these data are the concentrations at 11, 12, and 1 o'clock pre-crash lines-of-sight, with the sum being 77.0%. The highest concentration is at 11 o'clock (43.4%); that pre-crash line-of-sight is characteristic of the automobile turning left in front of the oncoming motorcycle. The high concentrations of the 11, 12 and 1 o'clock positions illustrate the sensitivity of the accident situation to rider attention and the clear orientation to the motorcycle path. In other words, "motorcycle rider, watch where you are going; that is where at least three-fourths of the accidents are coming from!"

It is **seen** that the extreme peripheral fields are of little significance in hazard detection.

On rider's right,

At 3 o'clock, 0.8% of the hazards
4 o'clock, 0.4% of the hazards
5 o'clock, 0.8% of the hazards

On rider's left,

At 9 o'clock, 2.7% of *the* hazards
8 o'clock, 0.3% of the hazards
7 o'clock, 1.3% of the hazards


And, Prom directly behind the rider,

At 6 o'clock, 3.4% of the hazards

The extremely low incidence of hazards in the peripheral field denies the need for wide eye space in safety helmets; there is no need for lateral visual space greater than the current standard of 105° **from** the midsagittal plane.

TABLE 6.11.1. BEARING OF OTHER VEHICLES AS **SEEN** FROM MOTORCYCLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| One o'clock | 1. | 120 | 13.3 | 16.8 |
| Two o'clock | 2. | 43 | 4.8 | 6.0 |
| Three o'clock | 3. | 6 | 0.7 | 0.8 |
| Four o'clock | 4. | 3 | 0.3 | 0.4 |
| Five o'clock | 5. | 6 | 0.7 | 0.8 |
| Six o'clock | 6. | 24 | 2.7 | 3.4 |
| Seven o'clock | 7. | 9 | 1.0 | 1.3 |
| Eight o'clock | 8. | 2 | 0.2 | 0.3 |
| Nine o'clock | 9. | 19 | 2.1 | 2.7 |
| Ten o'clock | 10. | 53 | 5.9 | 7.4 |
| Eleven o'clock | 11. | 311 | 34.6 | 43.4 |
| Twelve o'clock | 12. | 120 | 13.3 | 16.8 |
| N.A. | 99. | 184 | 20.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

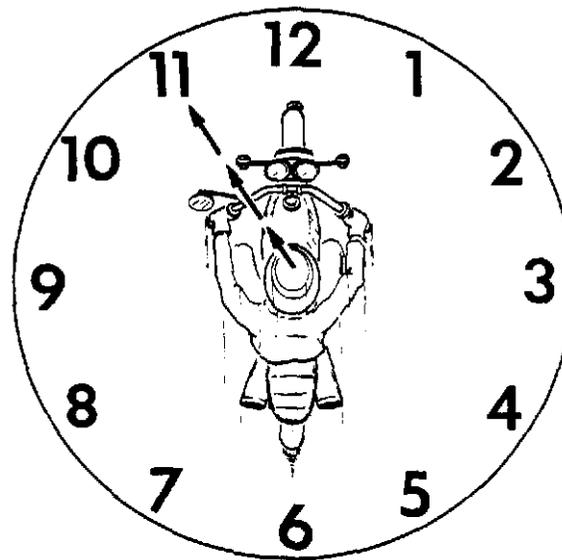


The sum of the 10, 11, 12, 1 and 2 o'clock **precrash** lines-of-sight is 90.4%. This clearly establishes the conspicuity problem of the motorcycle as one of the front surfaces. All conspicuity treatments should focus upon this frontal region of the motorcycle-rides configuration because this is the surface most often presented to the driver of the other vehicle.

The predominating pre-crash line-of-sight orientations of 11+12+1 o'clock relates the feeble contribution possible by side reflectors on motorcycles. The reflector orientation is ineffective and no light source from the other vehicle is directed at the reflector. Active sidelamps with the forward oblique - rather than lateral - alignment have the potential of effective conspicuity contribution. A good example of effective design for this favorable effect is the **Vetter Wind-jammer fairing** with "Leading Edge Lights."

Retroreflective material on the motorcycle has the same shortcoming as any **reflectorized** surface; the contribution to conspicuity is dependent upon the other vehicle light source aimed at that reflector on the motorcycle. This situation is absent in daytime and rare at nighttime. Of course, the retroreflective material will respond to ambient light but that source has obvious limits for daylight considerations.

Table 6.11.2 shows the distribution of the precrash lines-of-sight for the ambient light at the accident scene. Daytime and daylight predominate with 552 or 77.1% of those accidents. Dawn-dusk light conditions existed for 42 or 5.9% and 122 or 17.0% of those accidents occurred at night.

Table 6.11.3 shows the relationship between motorcycle headlamp equipment and **function** for the pre-crash line-of-sight for all of the multiple vehicle collisions (716) in the total of on-scene, in-depth accident investigations (900). Table 6.11.4 illustrates these data for all multiple vehicle accidents for all 24 hours of the day, i.e., daylight + dusk + dawn + night. The numbers collected at each clock position are as follows, (for example, at 11 o'clock):

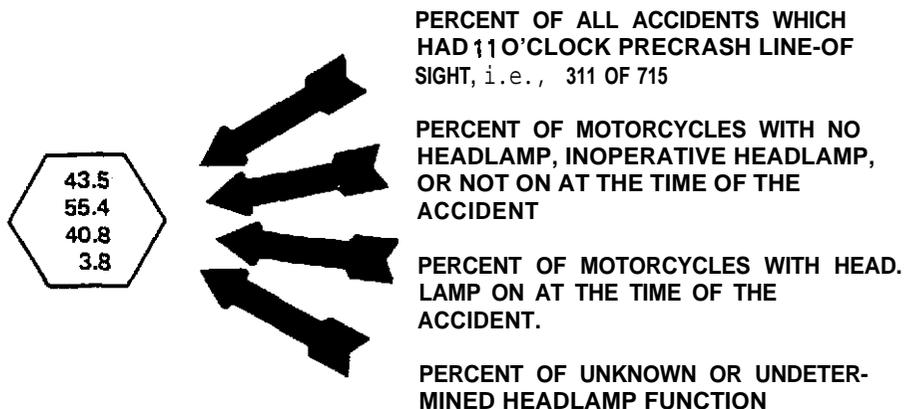

Tables 6.11.5 and 6.11.6 show those pre-crash line-of-sight distributions for night conditions. In these data, the predominant orientation is the 11 o'clock position, which is most likely the oncoming automobile turning left in front of the motorcycle. Also, the total of 11, 12, and 1 o'clock pre-crash line-of-sight frequencies is 77.9% of all orientations.

The peripheral fields illustrate extremely low frequencies; the headlamp use is high, but the non-use of headlamp noted in the 11 and 12 o'clock positions is the simplest explanation for nighttime accident involvement. The 6.6% of precrash line-of-sight at 6 o'clock implies some need for more conspicuous rear lamps.

Tables 6.11.7 and 6.11.8 show these data for dusk-dawn ambient light conditions. The sum of the precrash line-of-sight frequencies for 11, 12, and 1 o'clock is 78.6%.

Tables 6.11.9 and 6.11.10 show those data for daylight conditions. The sum of the precrash line-of-sight frequencies for 11, 12, and 1 o'clock is 76.6% and the peripheral regions have only insignificant contribution. The most important


TABLE 6.11.2. BEARING OF OTHER VEHICLES AS SEEN FROM MOTORCYCLE
VERSUS ILLUMINATION

| Count Row Pct Col Pct Tot Pct | Illumination | | | | Row Total |
|--|-----------------------------|--------------------------|---------------------------|--------------------------|--------------|
| | Daylight | Dawn or Dusk | Night- Lighted | Night- Unlighted | |
| 1. | 90 75.0 16.3 12.6 | 11 9.2 26.2 1.5 | 17 14.2 15.6 2.4 | 2 1.7 15.4 0.3 | 120 16.8 |
| 2. | 40 93.0 7.2 5.6 | 0 0.0 0.0 0.0 | 2 4.7 1.8 0.3 | 1 2.3 7.7 0.1 | 43 6.0 |
| 3. | 5 83.3 0.9 0.7 | 0 0.0 0.0 0.0 | 1 16.7 0.9 0.1 | 0 0.0 0.0 0.0 | 6 0.8 |
| 4. | 2 66.7 0.4 0.3 | 1 33.3 2.4 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 0.4 |
| 5. | 2 33.3 0.4 0.3 | 1 16.7 2.4 0.1 | 3 50.0 2.8 0.4 | 0 0.0 0.0 0.0 | 6 0.8 |
| 6. | 15 62.5 2.7 2.1 | 1 4.2 2.4 0.1 | 5 20.8 4.6 0.7 | 3 12.5 23.1 0.4 | 24 3.4 |
| 7. | 6 66.7 1.1 0.8 | 2 22.2 4.8 0.3 | 1 11.1 0.9 0.1 | 0 0.0 0.0 0.0 | 9 1.3 |
| 8. | 2 100.0 0.4 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 0.3 |
| 9. | 15 78.9 2.7 2.1 | 2 10.5 4.8 0.3 | 2 10.5 1.8 0.3 | 0 0.0 0.0 0.0 | 19 2.7 |
| 10. | 42 79.2 7.6 5.9 | 2 3.8 4.8 0.3 | 8 15.1 7.3 1.1 | 1 1.9 7.7 0.1 | 53 7.4 |
| 11. | 234 75.2 42.4 32.7 | 16 5.1 38.1 2.2 | 57 18.3 52.3 8.0 | 4 1.3 30.8 0.6 | 311 43.4 |
| 12. | 99 82.5 17.9 13.8 | 6 5.0 14.3 0.8 | 13 10.8 11.9 1.8 | 2 1.7 15.4 0.3 | 120 16.8 |
| Column Total | 552 77.1 | 42 5.9 | 109 15.2 | 13 1.8 | 716 100.0 |

TABLE 6.11.3. BEARING OF OTHER VEHICLE AS SEEN FROM MOTORCYCLE VERSUS MOTORCYCLE HEADLAMP OPERATION (OSIDs)

| Count Row Pct Col Pct Tot Pct | Motorcycle Headlamp | | | | Operation | | Row Total |
|--|-------------------------|-------------------------|-----------------------------|-----------------------------|-------------------------|-------------------------|--------------|
| | Not Equipped | Equip., Not Oper | Oper. Not On | On At Acciden | Equip., Not Known | Known If On | |
| 1. | 2 1.7 12.5 0.3 | 1 0.8 5.9 0.1 | 54 45.0 15.2 7.5 | 56 46.7 18.9 7.8 | 3 2.5 20.0 0.4 | 4 3.3 5.0 0.6 | 120 16.8 |
| 2. | 3 7.0 18.8 0.4 | 1 2.3 5.9 0.1 | 23 53.5 6.5 3.2 | 12 27.9 4.0 1.7 | 2 4.7 13.3 0.3 | 2 4.7 2.5 0.3 | 43 6.0 |
| 3. | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 4 66.7 1.1 0.6 | 1 16.7 0.3 0.1 | 1 16.7 6.7 0.1 | 0 0.0 0.0 0.0 | 6 0.8 |
| 4. | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 100.0 0.8 0.4 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 0.4 |
| 5. | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 33.3 0.6 0.3 | 4 66.7 1.3 0.6 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 6 0.8 |
| 6. | 1 4.2 6.3 0.1 | 0 0.0 0.0 0.0 | 9 37.5 2.5 1.3 | 14 58.3 4.7 2.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 24 3.4 |
| 7. | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 5 55.6 1.4 0.7 | 4 44.4 1.3 0.6 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 9 1.3 |
| 8. | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 100.0 0.7 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 0.3 |
| 9. | 0 0.0 0.0 0.0 | 1 5.3 5.9 0.1 | 13 68.4 3.7 1.8 | 4 21.1 1.3 0.6 | 1 5.3 6.7 0.1 | 0 0.0 0.0 0.0 | 19 2.7 |
| 10. | 3 5.7 18.8 0.4 | 5 9.4 29.4 0.7 | 25 47.2 7.0 3.5 | 19 35.8 6.4 2.7 | 0 0.0 0.0 0.0 | 1 1.9 6.3 0.1 | 53 7.4 |
| 11. | 7 2.3 43.8 1.0 | 7 2.3 41.2 1.0 | 158 50.8 44.5 22.1 | 127 40.8 42.8 17.7 | 6 1.9 40.0 0.8 | 6 1.9 17.5 0.8 | 311 33.4 |
| 12. | 0 0.0 0.0 0.0 | 2 1.7 11.8 0.3 | 59 49.2 16.6 8.2 | 54 45.0 18.2 7.5 | 2 1.7 13.3 0.3 | 3 2.5 8.8 0.4 | 120 16.8 |
| Column Total | 16 2.2 | 17 2.4 | 355 49.6 | 297 41.5 | 15 2.1 | 16 2.2 | 716 100.0 |

TABLE 6.11.4. MOTORCYCLE RIDER PRE-CRASH LINE-OF-SIGHT TO THE OTHERVEHICLE

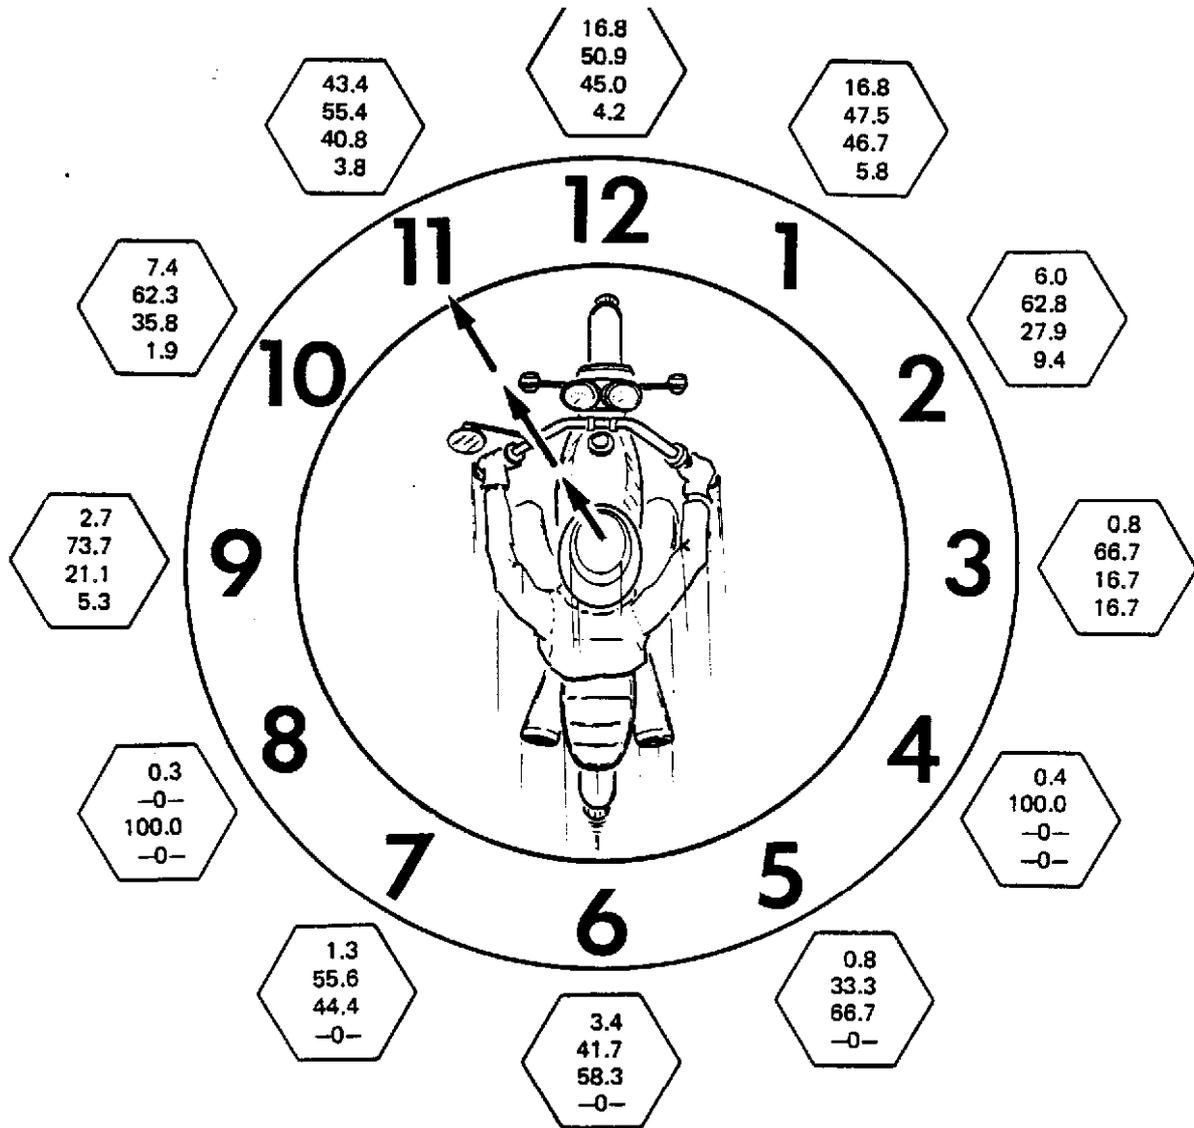


TOTAL: DAY • DUSK-DAWN + NIGHT (716)
 24 HOURS
 11 + 12 + 1: 77.0%

TABLE 6.11.5. BEARING OF OTHER VEHICLE AS SEEN FROM MOTORCYCLE
VERSUS MOTORCYCLE HEADLAMP OPERATION

| count Row Pct Col Pct Tot Pct | Motorcycle Headlamp Operation | | | | | Row Total |
|--|-------------------------------|---------------------|-----------------|-------------------|----------------------|--------------|
| | Not Equipped | Equip., Not Oper | Oper, Not On | On At Accident | Equip.. Not Known | |
| Bearing of the Other Vehicle | 0 | 0 | 0 | 18 | 1 | 19 |
| | 0.0 | 0.0 | 0.0 | 94.7 | 5.3 | 15.6 |
| | 0.0 | 0.0 | 0.0 | 15.8 | 100.0 | |
| | 0.0 | 0.0 | 0.0 | 14.8 | 0.8 | |
| | 0 | 0 | 0 | 3 | 0 | 3 |
| | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 2.5 |
| | 0.0 | 0.0 | 0.0 | 2.6 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 2.5 | 0.0 | |
| | 0 | 0 | 0 | 1 | 0 | 1 |
| | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.8 |
| | 0.0 | 0.0 | 0.0 | 0.9 | 0.0 | |
| 0.0 | 0.0 | 0.0 | 0.8 | 0.0 | | |
| 0 | 0 | 0 | 3 | 0 | 3 | |
| 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 2.5 | |
| 0.0 | 0.0 | 0.0 | 2.6 | 0.0 | | |
| 0.0 | 0.0 | 0.0 | 2.5 | 0.0 | | |
| 0 | 0 | 0 | 8 | 0 | a | |
| 0.0 | 0.0 | 0.0 | ion.0 | 0.0 | 6.6 | |
| 0.0 | 0.0 | 0.0 | 7.0 | 0.0 | | |
| 0.0 | 0.0 | 0.0 | 6.6 | 0.0 | | |
| 0 | 0 | 0 | 1 | 0 | 1 | |
| 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.8 | |
| 0.0 | 0.0 | 0.0 | 0.9 | 0.0 | | |
| 0.0 | 0.0 | 0.0 | 0.8 | 0.0 | | |
| 0 | 0 | 0 | 2 | 0 | 2 | |
| 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 1.6 | |
| 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | | |
| 0.0 | 0.0 | 0.0 | 1.6 | 0.0 | | |
| 0 | 0 | 0 | 9 | 0 | 9 | |
| 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 7.4 | |
| 0.0 | 0.0 | 0.0 | 7.9 | 0.0 | | |
| 0.0 | 0.0 | 0.0 | 7.4 | 0.0 | | |
| 1 | 0 | 4 | 56 | 0 | 61 | |
| 1.6 | 0.0 | 6.6 | 91.8 | 0.0 | 50.0 | |
| 100.0 | 0.0 | 80.0 | 49.1 | 0.0 | | |
| 0.8 | 0.0 | 3.3 | 45.9 | 0.0 | | |
| 0 | 1 | 1 | 13 | 0 | 15 | |
| 0.0 | 6.7 | 6.7 | 86.7 | 0.0 | 12.3 | |
| 0.0 | 100.0 | 20.0 | 11.4 | 0.0 | | |
| 0.0 | 0.8 | 0.8 | 10.7 | 0.0 | | |
| Column Total | 1 0.8 | 1 0.8 | 5 4.1 | 114 93.4 | 1 0.8 | 122 100.0 |

Night Only (122 cases), 11 + 12 + 1 o'clock: 77.9%

TABLE 6.11.6. MOTORCYCLE RIDER PRE-CRASH LINE-OF-SIGHT TO THE OTHER VEHICLE (OSIDs)

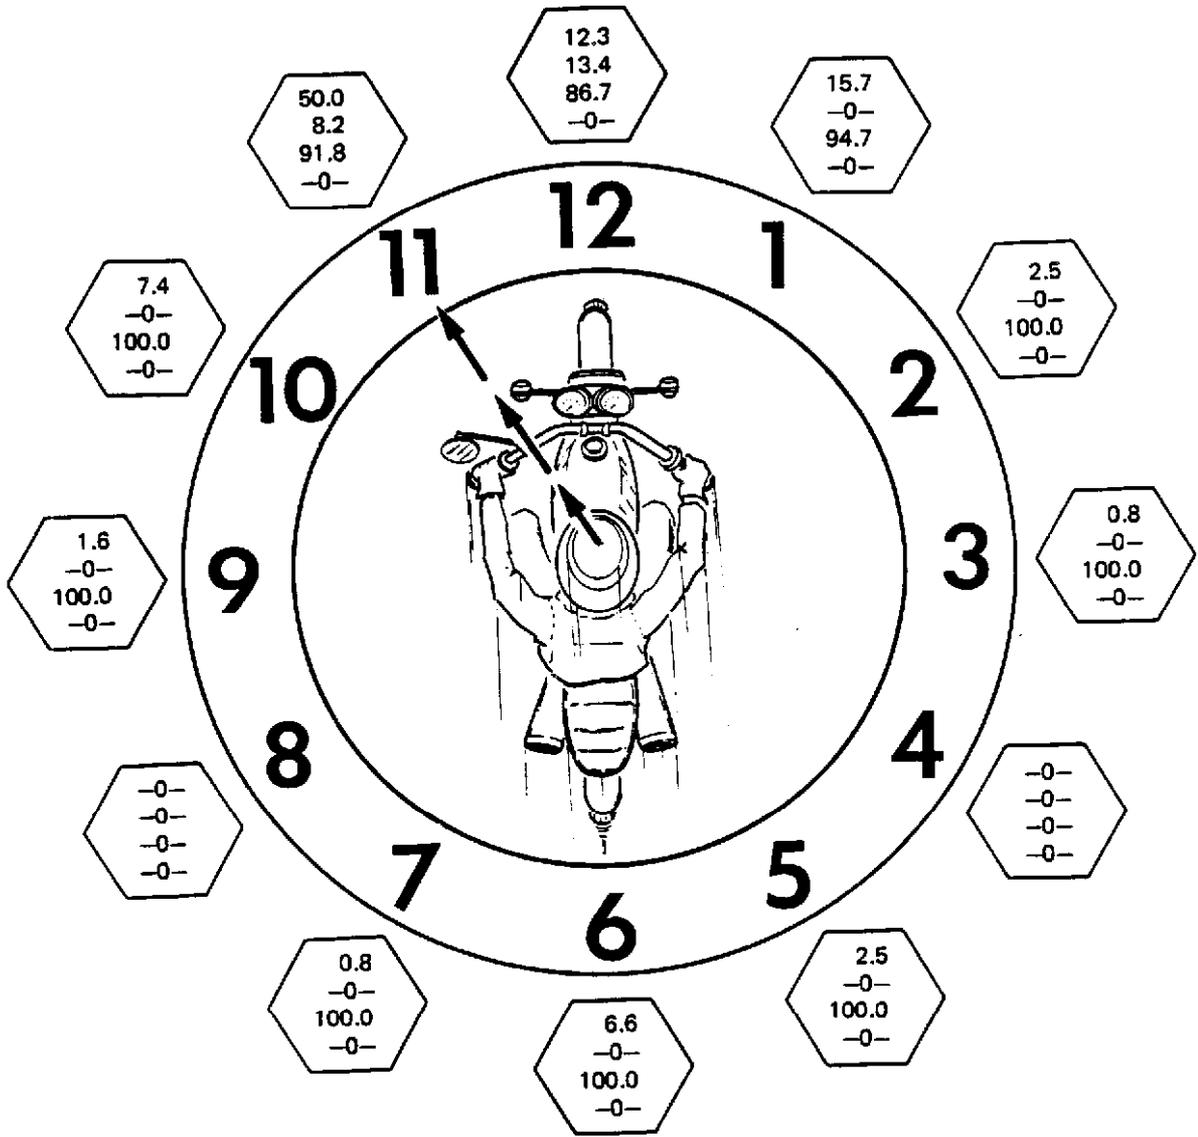

NIGHTTIME ONLY (122)
 11 + 12 + 1: 77.9%


TABLE 6.11.7. BEARING OF OTHER VEHICLE AS SEEN FROM MOTORCYCLE
VERSUS MOTORCYCLE HEADLAMP OPERATION

| Count Row Pct Col Pct Tot Pct | Motorcycle Headlamp operation | | | | Row Total | |
|--|-------------------------------|----------------------|-----------------|-------------------|--------------|-----------------|
| | Not Equipped | Equip., Not Oper. | Oper, Not On | On at Accident | | Unknow If On |
| 1. | 1 | 1 | 4 | 4 | 1 | 11 |
| | 9.1 | 9.1 | 36.4 | 36.4 | 9.1 | 26.2 |
| | 50.0 | 33.3 | 23.5 | 23.5 | 33.3 | |
| | 2.4 | 2.4 | 9.5 | 9.5 | 2.4 | |
| 4. | 0 | 0 | 1 | 0 | 0 | 1 |
| | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 2.4 |
| | 0.0 | 0.0 | 5.9 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 2.4 | 0.0 | 0.0 | |
| 5. | 0 | 0 | 0 | 1 | 0 | 1 |
| | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 2.4 |
| | 0.0 | 0.0 | 0.0 | 5.9 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 2.4 | 0.0 | |
| 6. | 0 | 0 | 0 | 1 | 0 | 1 |
| | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 2.4 |
| | 0.0 | 0.0 | 0.0 | 5.9 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 2.4 | 0.0 | |
| 7. | 0 | 0 | 1 | 1 | 0 | 2 |
| | 0.0 | 0.0 | 50.0 | 50.0 | 0.0 | 4.8 |
| | 0.0 | 0.0 | 5.9 | 5.9 | 0.0 | |
| | 0.0 | 0.0 | 2.4 | 2.4 | 0.0 | |
| 9. | 0 | 1 | 0 | 1 | 0 | 2 |
| | 0.0 | 50.0 | 0.0 | 50.0 | 0.0 | 4.8 |
| | 0.0 | 33.3 | 0.0 | 5.9 | 0.0 | |
| | 0.0 | 2.4 | 0.0 | 2.4 | 0.0 | |
| 10. | 0 | 0 | 1 | 0 | 1 | 2 |
| | 0.0 | 0.0 | 50.0 | 0.0 | 50.0 | 4.8 |
| | 0.0 | 0.0 | 5.9 | 0.0 | 33.3 | |
| | 0.0 | 0.0 | 2.4 | 0.0 | 2.4 | |
| 11. | 1 | 0 | 9 | 5 | 1 | 16 |
| | 6.3 | 0.0 | 56.3 | 31.3 | 6.3 | 38.1 |
| | 50.0 | 0.0 | 52.9 | 29.4 | 33.3 | |
| | 2.4 | 0.0 | 21.4 | 11.9 | 2.4 | |
| 12. | 0 | 1 | 1 | 4 | 0 | 6 |
| | 0.0 | 16.7 | 16.7 | 66.7 | 0.0 | 14.3 |
| | 0.0 | 33.3 | 5.9 | 23.5 | 0.0 | |
| | 0.0 | 2.4 | 2.4 | 9.5 | 0.0 | |
| Column Total | 2 4.8 | 3 7.1 | 17 40.5 | 17 40.5 | 3 7.1 | 42 100.0 |

Dusk-Dawn Only (42 cases)

11 + 12 + 1 o'clock: 78.6%

TABLE 6.11.8. MOTORCYCLE RIDER PRE-CRASH LINE-OF-SIGHT TO THE OTHER VEHICLE (OSIDs)

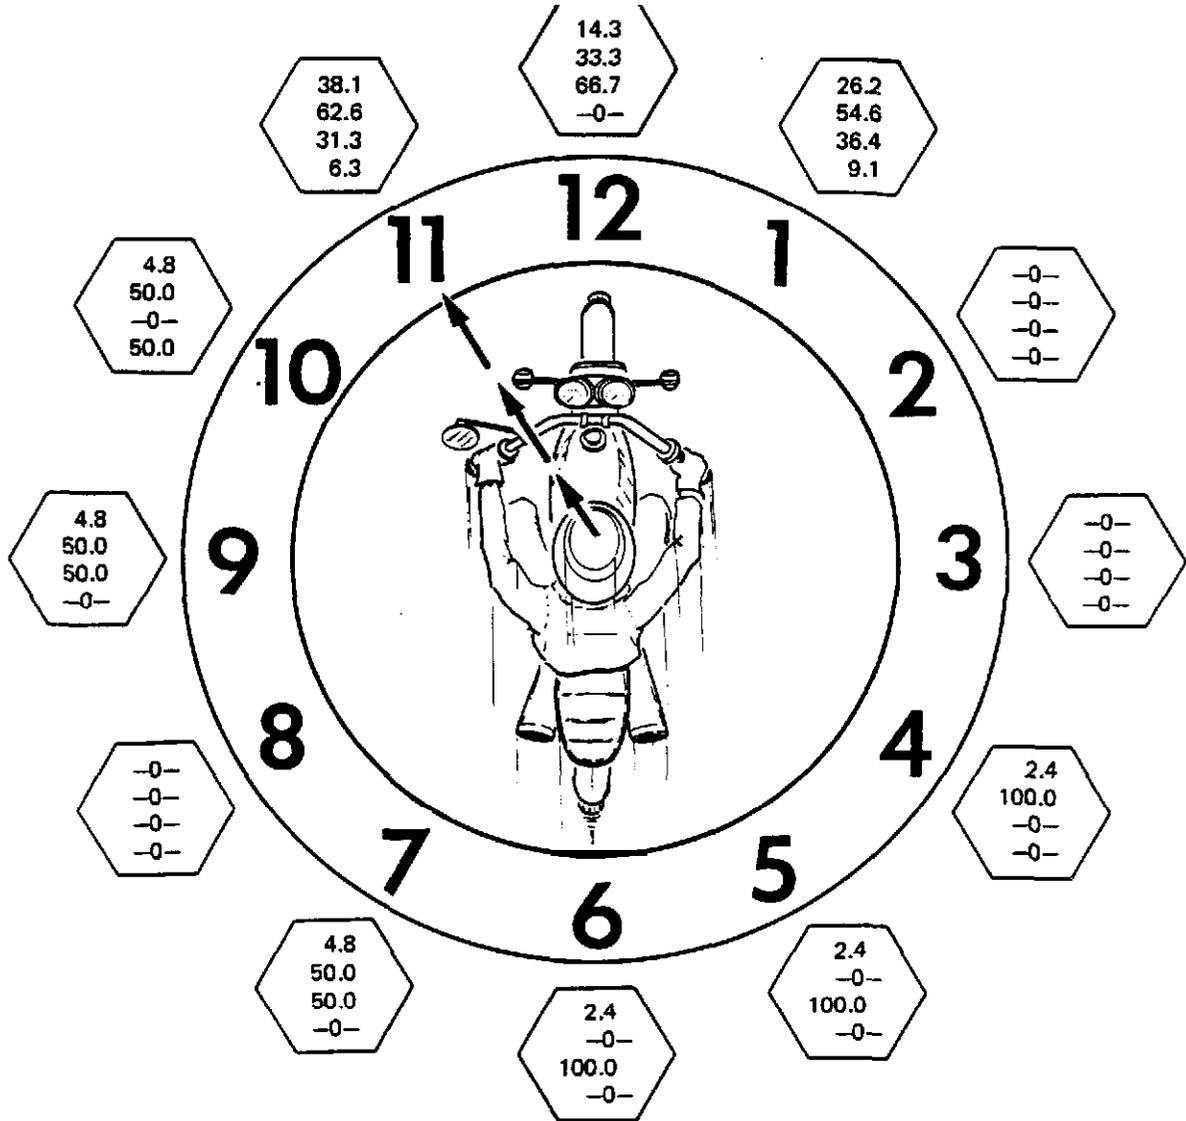


DUSK-DAWN ONLY (42)
 11 + 12 + 1: 78.6%

TABLE 6.11.9. BEARING OF OTHER VEHICLE AS SEEN FROM MOTORCYCLE
VERSUS MOTORCYCLE HEADLAMP OPERATION

| Count Row Pct Col Pct Tot Pct | Motorcycle Headlamp Operation | | | | | | Row Total |
|--|-------------------------------|---------------------|-----------------|-------------------|----------------------|------------------|--------------|
| | Not Equipped | Equip., Not Oper | Oper, Not On | On at Accident | Equip., Not Known | Unknown If On | |
| 1. | 1 | 0 | 50 | 34 | 2 | 2 | 90 |
| | 1.1 | 0.0 | 55.6 | 37.8 | 2.2 | 3.3 | 16.3 |
| | 7.7 | 0.0 | 15.0 | 20.5 | 14.3 | 23.1 | |
| | 0.2 | 0.0 | 9.1 | 6.2 | 0.4 | 0.5 | |
| 2. | 3 | 1 | 23 | 9 | 2 | 2 | 40 |
| | 7.5 | 2.5 | 57.5 | 22.5 | 5.0 | 5.0 | 7.2 |
| | 23.1 | 7.7 | 6.9 | 5.4 | 14.3 | 15.4 | |
| | 0.5 | 0.2 | 4.2 | 1.6 | 0.4 | 0.4 | |
| 3. | 0 | 0 | 4 | 0 | 1 | 0 | 5 |
| | 0.0 | 0.0 | 80.0 | 0.0 | 20.0 | 0.0 | 0.9 |
| | 0.0 | 0.0 | 1.2 | 0.0 | 7.1 | 0.0 | |
| | 0.0 | 0.0 | 0.7 | 0.0 | 0.2 | 0.0 | |
| 4. | 0 | 0 | 2 | 0 | 0 | 0 | 2 |
| | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.4 |
| | 0.0 | 0.0 | 0.6 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.4 | 0.0 | 0.0 | 0.0 | |
| 5. | 0 | 0 | 2 | 0 | 0 | 0 | 2 |
| | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.4 |
| | 0.0 | 0.0 | 0.6 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.4 | 0.0 | 0.0 | 0.0 | |
| 6. | 1 | 0 | 9 | 5 | 0 | 0 | 15 |
| | 6.7 | 0.0 | 60.0 | 33.3 | 0.0 | 0.0 | 2.7 |
| | 7.7 | 0.0 | 2.7 | 3.0 | 0.0 | 0.0 | |
| | 0.2 | 0.0 | 1.6 | 0.9 | 0.0 | 0.0 | |
| 7. | 0 | 0 | 4 | 2 | 0 | 0 | 6 |
| | 0.0 | 0.0 | 66.7 | 33.3 | 0.0 | 0.0 | 1.1 |
| | 0.0 | 0.0 | 1.2 | 1.2 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.7 | 0.4 | 0.0 | 0.0 | |
| 8. | 0 | 0 | 0 | 2 | 0 | 0 | 2 |
| | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.4 |
| | 0.0 | 0.0 | 0.0 | 1.2 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.4 | 0.0 | 0.0 | |
| 9. | 0 | 0 | 13 | 1 | 1 | 0 | 15 |
| | 0.0 | 0.0 | 86.7 | 6.7 | 6.7 | 0.0 | 2.7 |
| | 0.0 | 0.0 | 3.9 | 0.6 | 7.1 | 0.0 | |
| | 0.0 | 0.0 | 2.4 | 0.2 | 0.2 | 0.0 | |
| 10. | 3 | 5 | 24 | 10 | 0 | 0 | 42 |
| | 7.1 | 11.9 | 57.1 | 23.8 | 0.0 | 0.0 | 7.6 |
| | 23.1 | 38.5 | 7.2 | 6.0 | 0.0 | 0.0 | |
| | 0.5 | 0.9 | 4.3 | 1.8 | 0.0 | 0.0 | |
| 11. | 5 | 7 | 145 | 66 | 6 | 5 | 234 |
| | 2.1 | 3.0 | 62.0 | 28.2 | 2.6 | 2.1 | 42.4 |
| | 38.5 | 53.8 | 43.5 | 39.8 | 42.9 | 38.5 | |
| | 0.9 | 1.3 | 26.3 | 12.0 | 1.1 | 0.9 | |
| 12. | 0 | 0 | 57 | 37 | 2 | 3 | 99 |
| | 0.0 | 0.0 | 57.6 | 37.4 | 2.0 | 3.0 | 17.9 |
| | 0.0 | 0.0 | 17.1 | 22.3 | 14.3 | 23.1 | |
| | 0.0 | 0.0 | 10.3 | 6.7 | 0.4 | 0.5 | |
| Column Total | 13 | 13 | 333 | 166 | 14 | 13 | 552 |
| | 2.4 | 2.4 | 60.3 | 30.1 | 2.5 | 2.4 | 100.0 |

Daylight Only (552 Cases)
11 + 12 + 1 o'clock: 76.6%

TABLE 6.11.10. MOTORCYCLE RIDER PRE-CRASH LINE-OF-SIGHT TO OTHER VEHICLE (OSIDs)

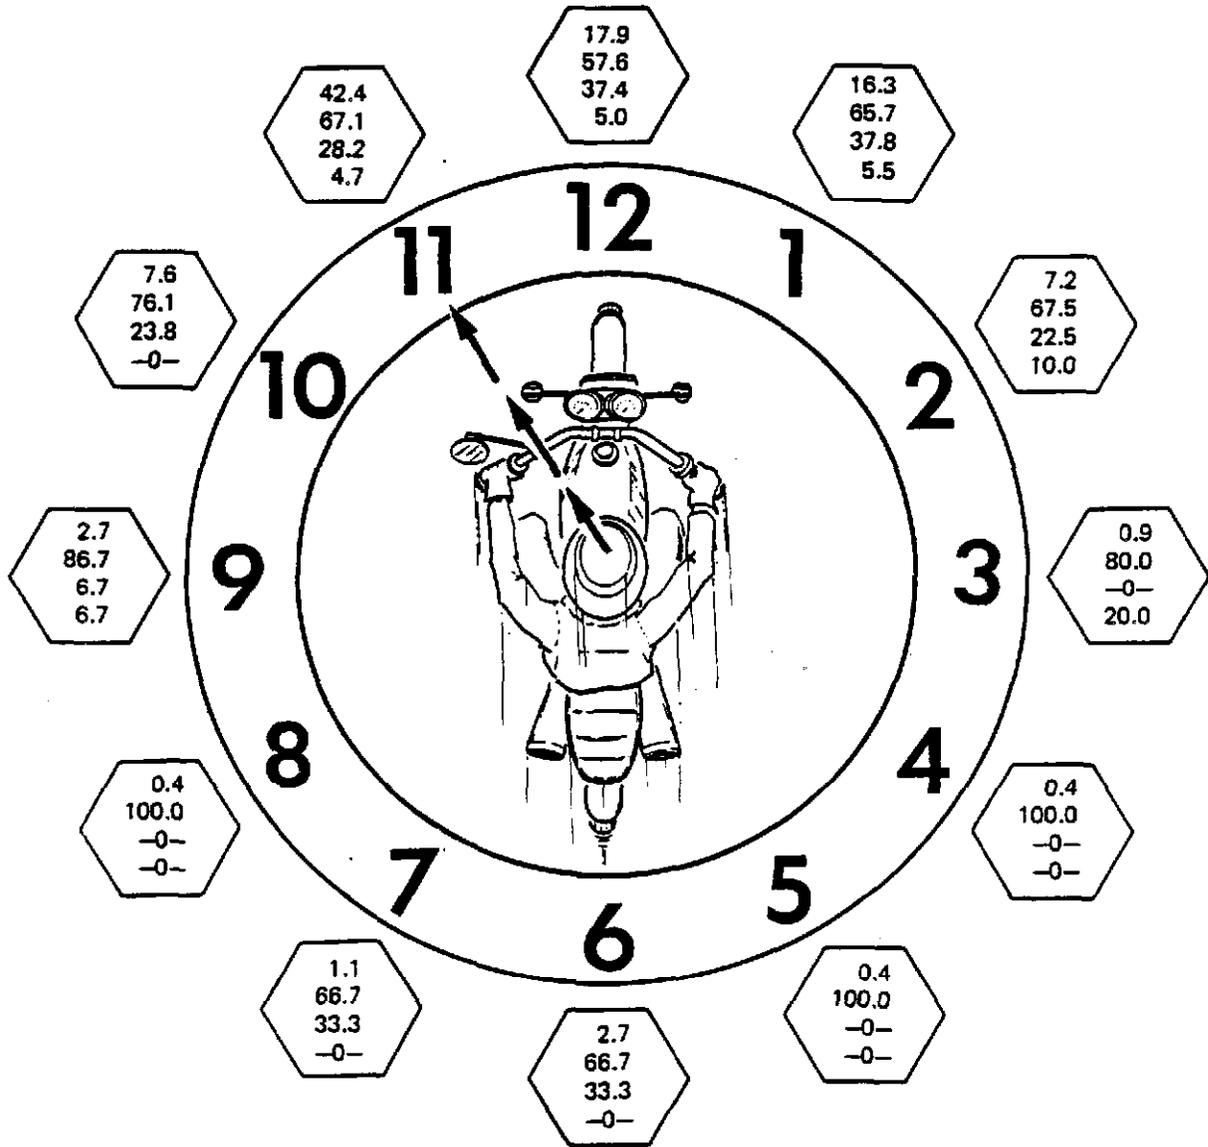

DAYLIGHT ONLY (5521)
 11 + 12 + 1: 76.6%

factor related by these figures is the effectiveness of the headlamp being on in daytime as an accident countermeasure. It is clear that the headlamp is most likely to be effective along those lines-of-sight where the headlamp would offer high contrast conspicuity, i.e., 11, 12, and 1 o'clock orientations. e daytime data show:

| | | | |
|--|------|------|------|
| Clock line-of-sight | 11 | 12 | 1 |
| Accident Frequency | 42.4 | 17.9 | 16.3 |
| Headlamp not equipped, or off, or inoperative | 67.1 | 57.6 | 56.7 |
| Headlamp on | 28.2 | 37.4 | 37.8 |
| Unknown/Undetermined | 4.7 | 5.0 | 5.5 |

Exposure data show that at least 60% of the population-at-risk had headlamps on in the daytime. Consequently, those motorcycles with headlamps on in daylight would be under-represented in the accident population and the countermeasure is effective. Also, it is possible that the voluntary use of the headlamp on in the daylight is an indication of the more knowledgeable or cautious motorcycle rider, who would be less accident-involved. **However**, the overall effect **shown** in these data is a great potential of reduced accident involvement by headlamp use in daylight.

While data were not recorded for all 900 accident cases, a sample of vehicle examinations showed that those motorcycles with the headlamp on had the following:

| | |
|-------------------------|------------|
| Low beam selected | 87% |
| High beam selected | 6% |
| Unknown or undetermined | 7% |

So, the data related for headlamp effectiveness **may** be assumed in the majority to represent the contribution of low beam operation.

6.12 Crash Bar Effectiveness

The effectiveness of crash bars "as investigated by comparing motorcycle equipment and the incidence of injuries to the rider's ankle-foot, lower leg, knee and thigh regions. Table 6.12.1 shows the motorcycle crash bar equipment for the 900 on-scene, in-depth accident investigation cases. This table shows that 163 accident-involved motorcycles were equipped with some kind of crash bars, i.e., 18.1%. Engine "case-savers" were not counted as crash bars since those accessories serve only to protect the **mechanical** components and offer no substantial obstacle to an injury source. Note also that 230 (25.6%) of those motorcycles were not involved in collision with another vehicle, although another vehicle may have been involved in accident causation in approximately fifty of those cases; collisions with other vehicles were Involved in 667 (74.1%).

There "as no attempt to evaluate the crash bar configuration on an individual accident case; some crash bars were flimsy tube structures attached with U-bolts or hose clamps while others were substantial integral structures. Individual cases

TABLE 6.12.1. CRASHBAR-EQUIPPED VERSUS MULTIPLE/SINGLE VEHICLE ACCIDENT (OSIDs)

| Crashbar | Count | Single Vehicle | Multi-Vehicle | Unknown | Row Total |
|---------------------|-------------------------------|----------------|---------------|---------|-----------|
| | Row Pct Col Pct Tot Pct | | | | |
| None | 193 | 193 | 540 | 3 | 736 |
| | 26.2 | 26.2 | 73.4 | 0.4 | 81.8 |
| | 83.9 | 83.9 | 81.0 | 100.0 | |
| | 21.4 | 21.4 | 60.0 | 0.3 | |
| Unknown | 36 | 36 | 127 | 0 | 163 |
| | 22.1 | 22.1 | 77.9 | 0.0 | 18.1 |
| | 15.7 | 15.7 | 19.0 | 0.0 | |
| | 4.0 | 4.0 | 14.1 | 0.0 | |
| | 1 | 1 | 0 | 0 | 1 |
| | 100.0 | 100.0 | 0.0 | 0.0 | 0.1 |
| | 0.4 | 0.4 | 0.0 | 0.0 | |
| 0.1 | 0.1 | 0.0 | 0.0 | | |
| Column Total | 230 | 230 | 667 | 3 | 900 |
| | 25.6 | 25.6 | 74.1 | 0.3 | 100.0 |

showed examples of success as well as failure of the minimum strength crash bars and then failure as well as success of the **more** substantial crash bars.

Table 6.12.2 shows the investigator's evaluation of the crash bar damage. In 18 of the crash bar equipped motorcycles, the crash bars were agents of injury, accounting for 22 discrete injuries as the contact surface.

TABLE 6.12.2. DAMAGE TO CRASH BARS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-------|--------------------|------------------------|------------------------|
| No Damage | 0. | 9 | 1.0 | 5.5 |
| Damage, No Injury | 1. | 136 | 15.1 | 83.4 |
| Damage + Injury | 2. | 18 | 2.0 | 10.9 |
| Damage, Injury Unknown | 7. | 2 | 0.2 | 1.2 |
| Unknown | a. | 1 | 0.1 | Missing |
| N.A., No Crashbars | 9. | 734 | 81.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Crash bars have the prospect of protecting the lower limbs in the event of collision with another vehicle, or during a fall to the roadway. The regions of the body most likely to be involved are the somatic regions of the thigh (T), knee (K), lower leg (L), and ankle-foot (Q). In the 900 accident cases, there were 1321 discrete injuries to these "protectable" regions. Table 6.12.3 shows the distribution of these individual injuries to the protectable regions, for the 900 motorcycles with and without crash bars. The motorcycles equipped with crash bars (16.1%) accounted for a" equivalent share (17.9%) of the injuries to those regions of the body that are assumed to be protectable by crash bars. Consequently, no advantage is obvious from the use of crash bars.

TABLE 6.12.3. INJURY SEVERITY TO PROTECTABLE REGIONS (T + K + L + Q)
BY MOTORCYCLE CRASHBAR USAGE (OSIDs)

| Crashbar | Count | Injury Severity | | | | | | Total |
|----------|-------------------------------|-----------------|----------|--------|---------|----------|---------|-------|
| | Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Serious | Critical | Unknown | |
| None | 822 | 163 | 64 | 34 | 1 | 1 | 1085 | |
| | 75.8 | 15.0 | 5.9 | 3.1 | 0.1 | 0.1 | 82.1 | |
| | 82.2 | 83.6 | 75.3 | 87.2 | 100.0 | 100.0 | | |
| | 62.2 | 12.3 | 4.8 | 2.6 | 0.1 | 0.1 | | |
| Yes | 178 | 32 | 21 | 5 | 0 | 0 | 236 | |
| | 75.4 | 13.6 | a.9 | 2.1 | 0.0 | 0.0 | 17.9 | |
| | 17.8 | 16.4 | 24.7 | 12.8 | 0.0 | 0.0 | | |
| | 13.5 | 2.4 | 1.6 | 0.4 | 0.0 | 0.0 | | |
| Column | 1000 | 195 | a5 | 39 | 1 | 1 | 1321 | |
| | 75.7 | 14.8 | 6.4 | 3.0 | 0.1 | 0.1 | 100.0 | |

Some explanation of the severe, serious and critical injuries will give perspective to these extreme injuries. The one case of AIS:5 was traumatic high amputation of the thigh due to leg entrapment in the collision surface. The great part of the AIS:4 and AIS:3 injuries are in that region of the lower leg, and because of the nature of those injuries, the two severity levels should be considered together rather than separate and distinctly different injury levels. For example, a compound, comminuted fracture of the tibia (AIS:3) differs only slightly in total effect from a compound, comminuted fracture of the tibia and fibula with severe tissue destruction (given AIS:4 in these data).

Additional details of crash bar performance are shown in Table 6.12.4, where the severity of injuries to the protectable regions are shown for the single and multiple vehicle collisions. Recall from Table 6.12.1 that the motorcycles were crash bar equipped in 15.7% of the single vehicle collisions and 19.0% of the multiple vehicle collisions. This comparison shows no favor or advantage to the use of crash bars in either single or multiple vehicle collisions. A popular concept of past time was that crash bars would support the motorcycle if it falls to the roadway thereby preventing injury to the rider's leg which could be trapped between the motorcycle and the roadway. The data offers no support for this concept.

TABLE 6.12.4. CRASHBAR EFFECTIVENESS IN SINGLE AND MULTIPLE VEHICLE COLLISIONS LEG INJURY SEVERITY BY CRASHBAR USAGE

| Single Vehicle Collisions | | | | | | | | |
|-----------------------------|--|-----------------|----------|--------|---------|----------|---------|-------|
| Crashbar | Count Row Pct Col Pct Tot Pct | Injury Severity | | | | | | Total |
| | | Minor | Moderate | Severe | Serious | Critical | Unknown | |
| None | 161 | 35 | 5 | 1 | 0 | 0 | 202 | |
| | 79.7 | 17.3 | 2.5 | 0.5 | 0.0 | 0.0 | 84.5 | |
| | 83.9 | 85.4 | 100.0 | 100.0 | 0.0 | 0.0 | | |
| | 67.4 | 14.6 | 2.1 | 0.4 | 0.0 | 0.0 | | |
| Yes | 31 | 6 | 0 | 0 | 0 | 0 | 37 | |
| | 83.8 | 16.2 | 0.0 | 0.0 | 0.0 | 0.0 | 15.5 | |
| | 16.1 | 14.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 13.0 | 2.5 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 192 | 41 | 5 | 1 | 0 | 0 | 239 | |
| | 80.3 | 17.2 | 2.1 | 0.4 | 0.0 | 0.0 | 100.0 | |
| Multiple Vehicle Collisions | | | | | | | | |
| None | 658 | 127 | 59 | 33 | 1 | 1 | 879 | |
| | 74.9 | 14.4 | 6.7 | 3.8 | 0.1 | 0.1 | 81.5 | |
| | 81.7 | 83.0 | 73.8 | 86.8 | 100.0 | 100.0 | | |
| | 61.0 | 11.8 | 5.5 | 3.1 | 0.1 | 0.1 | | |
| Yes | 147 | 26 | 21 | 5 | 0 | 0 | 199 | |
| | 73.9 | 13.1 | 10.6 | 2.5 | 0.0 | 0.0 | 18.5 | |
| | 18.3 | 17.0 | 26.3 | 13.2 | 0.0 | 0.0 | | |
| | 13.6 | 2.4 | 1.9 | 0.5 | 0.0 | 0.0 | | |
| Column Total | 805 | 153 | 80 | 38 | 1 | 1 | 1078 | |
| | 74.7 | 14.2 | 7.4 | 3.5 | 0.1 | 0.1 | 100.0 | |

Another popular concept of past time was that crash bars could prevent the intrusion of an automobile bumper or front corner and prevent injury to the rider's leg which could be trapped between the motorcycle and the automobile. In some cases where there is no initial 'collision' contact other than the leg entrapment, injuries would be limited only if some very substantial structure were between the rider leg and the automobile. In present time, the only structure of sufficient substance is the heavy cylinder of a horizontally opposed engine, e.g., BMW.

Contemporary crash bars do not have the strength, coverage, or (in many instances) the opportunity to have any significant effect in reducing injuries to the protectable regions. If the collision contact for the motorcycle is at the front, or front sides, of the motorcycle (61.9%), the impact response of the rider is to slide forward above the tank. Also, the pitching response at impact lifts the rear of the motorcycle thus partly vaulting the rider and elevating the protectable regions of the body. Of course, less vaulting of the motorcycle occupant(s) occurs due to motorcycle pitching when a passenger is present.

An examination of the **injuries** to the individual regions provides an added perspective of crash bar effectiveness. Tables 6.12.5, 6, 7 and 8 show that crash bar equipped motorcycles (18.1%) accounted for 19.4% of the thigh injuries, 20.1% of the knee injuries, 19.9% of the lower leg injuries, but only 9.4% of the ankle-foot injuries. The advantage of reduced ankle-foot injuries is lost by the disadvantage of increased knee, lower leg, and thigh injuries. In other words, crash bar performance in this study shows that crash bars help some, but also hurt some and the overall effect **is** no advantage.

TABLE 6.12.5. INJURY SEVERITY TO THIGH-UPPER LEG ONLY
BY CRASHBAR USAGE

| Crashbar | count Row Pct Col Pct Tot Pct | Injury Severity | | | | | Total |
|--------------|--|-----------------|-----------|----------|----------|--------------|-------|
| | | Minor | Moderate | Severe | Serious | Critical | |
| None | 129 | 26 | 12 | 2 | 1 | 170 80.6 | |
| | 75.9 | 15.3 | 7.1 | 1.2 | 0.6 | | |
| | 81.1 | 81.3 | 70.6 | 100.0 | 100.0 | | |
| | 61.1 | 12.3 | 5.7 | 0.9 | 0.5 | | |
| YOS | 30 | 6 | 5 | 0 | 0 | 41 19.4 | |
| | 73.2 | 14.6 | 12.2 | 0.0 | 0.0 | | |
| | 18.9 | 18.8 | 29.4 | 0.0 | 0.0 | | |
| | 14.2 | 2.8 | 2.4 | 0.0 | 0.0 | | |
| Column Total | 159 75.4 | 32 15.2 | 17 8.1 | 2 0.9 | 1 0.5 | 211 100.0 | |

TABLE 6.12.6. INJURY SEVERITY TO KNEE ONLY
BY CRASHBAR USAGE

| Crashbar | Count Row Pct Col Pct Tot | Injury Severity | | | | Total |
|--------------|------------------------------------|-----------------|-----------|----------|--------------|-------|
| | | Pctminor | Moderate | Severe | Serious | |
| None | 302 | 32 | 9 | 2 | 345 79.9 | |
| | 87.5 | 9.3 | 2.6 | 0.6 | | |
| | 80.5 | 76.2 | 69.2 | 100.0 | | |
| | 69.9 | 7.4 | 2.1 | 0.5 | | |
| Yss | 73 | 10 | 4 | 0 | a7 20.1 | |
| | 83.9 | 11.5 | 4.6 | 0.0 | | |
| | 19.5 | 23.8 | 30.8 | 0.0 | | |
| | 16.9 | 2.3 | 0.9 | 0.0 | | |
| Column Total | 375 86.8 | 42 9.7 | 13 3.0 | 2 0.5 | 432 100.0 | |

TABLE 6.12.7. INJURY SEVERITY TO LOWER LEG ONLY
BY CRASHBAR USAGE

| Crashbar | Count Row Pct Col Pct Tot Pct | Injury Severity | | | | | Total |
|-----------------|--|-----------------|----------|--------|---------|---------|-------|
| | | Minor | Moderate | Severe | Serious | Unknown | |
| None | 237 | 42 | 29 | 29 | 1 | 338 | |
| | 70.1 | 12.4 | 8.6 | 8.6 | 0.3 | 80.1 | |
| | 80.3 | 79.2 | 74.4 | 85.3 | 100.0 | | |
| | 56.2 | 10.0 | 6.9 | 6.9 | 0.2 | | |
| Yes | 58 | 11 | 10 | 5 | 0 | 84 | |
| | 69.0 | 13.1 | 11.9 | 6.0 | 0.0 | 19.9 | |
| | 19.7 | 20.8 | 25.6 | 14.7 | 0.0 | | |
| | 13.7 | 2.6 | 2.4 | 1.2 | 0.0 | | |
| Column Total | 295 | 53 | 39 | 34 | 1 | 422 | |
| | 69.9 | 12.6 | 9.2 | 8.1 | 0.2 | 100.0 | |

TABLE 6.12.8. INJURY SEVERITY TO ANKLE-FOOT ONLY
BY CRASHBAR USAGE

| Crashbar | Count Row Pct Col Pct Tot Pct | Injury severity | | | | Total |
|-----------------|--|-----------------|-----------|----------|--------------|-------|
| | | Minor | Moderate | Severe | Serious | |
| None | 154 | 63 | 14 | 1 | 232 | |
| | 66.4 | 27.2 | 6.0 | 0.4 | 90.6 | |
| | 90.1 | 92.6 | 87.5 | 100.0 | | |
| | 60.2 | 24.6 | 5.5 | 0.4 | | |
| Yes | 17 | 5 | 2 | 0 | 24 | |
| | 70.8 | 20.8 | 8.3 | 0.0 | 9.4 | |
| | 9.9 | 7.4 | 12.5 | 0.0 | | |
| | 6.6 | 2.0 | 0.8 | 0.0 | | |
| Total Column | 66.8 171 | 26.6 68 | 6.3 16 | 0.4 1 | 100.0 256 | |

The only truly substantial structure which could interrupt the intrusion of an automobile bumper or front corner is an engine cylinder (or two). Table 6.12.9 shows the injuries to the thigh, knee, lower leg, and ankle-foot for all BMW motorcycles encountered in this study. All BMW's in the study were the two-cylinder horizontally opposed cylinder configuration, and the BMW's were 1.6% of the accident case motorcycles but accounted for 0.83% of the injuries in the "protectable" regions.

| Count Row Pct Col Pct Tot Pct | Injury Severity | ROW Total |
|--|-----------------------|--------------|
| | Minor 1 | |
| Crashbar None | 2 | 2 |
| | 100.0 18.2 18.2 | 18.2 |
| Yes | 9 | 9 |
| | 100.0 81.8 81.8 | 81.8 |
| Column Total | 11 100.0 | 11 100.0 |

TABLE 6.12.9. CRASHBAR USAGE VERSUS INJURY TO THIGH, KNEE, LOWER LEG, ANKLE-FOOT FOR BMW

Table 6.12.10 shows the injuries to the thigh, knee, lower leg and ankle-foot for the Honda GL-1000 which was the 4-cylinder horizontally opposed cylinder configuration. The GL-1000 accounts for 1.1% of the accident population and accounted for 1.1% of the injuries in the "protectable" regions.

TABLE 6.12.10. CRASHBAR USAGE VERSUS INJURY TO THIGH, KNEE, LOWER LEG, ANKLE-FOOT FOR HONDA GL-1000

| Count Row Pct Col Pct Tot Pct | Injury Severity | | | Row Total |
|--|----------------------|----------------------|---------------------|--------------|
| | Minor 1 | Moderate 2 | Severe 3 | |
| Crashbar None | 6 | 1 | 1 | 8 |
| | 75.0 66.7 42.9 | 12.5 33.3 7.1 | 12.5 50.0 7.1 | 57.1 |
| Yes | 3 | 2 | 1 | 6 |
| | 50.0 33.3 21.4 | 33.3 66.7 14.3 | 16.7 50.0 7.1 | 42.9 |
| Column Total | 9 64.3 | 3 21.4 | 2 14.3 | 14 100.0 |

Table 6.12.11 shows the injuries to the same regions for all **Moto Guzzi** motorcycles encountered in the accident study. All **Moto Guzzis** in the study were the V-twin engine configuration with shaft drive. The **Moto Guzzis** were 0.8% of the accident population and accounted for 0.68% of the injuries to the "protectable" regions.

TABLE 6.12.11. **CRASHBAR** USAGE VERSUS INJURY
TO **THIGH, KNEE, LOWER LEG, ANKLE-FOOT**
FOR **MOTO GUZZI**

| COUNT Row Pct Col Pct Tot Pct | Injury Severity | | | ROW Total |
|--|----------------------------|----------------------------|---------------------------|--------------|
| | Minor 1 | Moderate 2 | Severe 3 | |
| Crashbar | | | | |
| None | 0 0.0 0.0 0.0 | 1 50.0 100.0 11.1 | 1 50.0 50.0 11.1 | 2 22.2 |
| Yes | 6 85.7 100.0 66.7 | 0 0.0 0.0 0.0 | 1 14.3 50.0 11.1 | 7 77.8 |
| Column Total | 6 66.7 | 11.1 | 22.2 | 9 100.0 |

For that whole group of motorcycles having large, heavy cylinders in positions which could conceivably protect the rider's legs (**BMW + GL-1000 +MG**), those motorcycles comprised 3.5% of the accident population and accounted for 2.61% of the injuries to the protectable regions.

Tables 6.12.12 and 13 show the distribution and severity of somatic injuries in the single vehicle collisions. Tables 6.12.14 and 15 show the distribution and severity of somatic injuries in the multiple vehicle collisions. **Crashbar** equipped motorcycles have less than their share of ankle-foot injuries, especially in the multiple vehicle accidents. It appears that the **crashbar** equipment on these accident-involved motorcycles has a favorable effect only in limiting injuries to the region of the ankle-foot.

6.13 Vehicle Defects

In general, vehicle defects are rare and the contribution to accident causation is small. Vehicle Failure of the motorcycle was the accident precipitating factor in 2.8% of the on-scene, in-depth accident investigation cases. The great part of the cases involved tire puncture flats and obvious maintenance defects.

TABLE 6.12.12. SINGLE VEHICLE SOMATIC INJURY DISTRIBUTION (OSIDs)

| Crashbar | Count Row Pct Col Pct Tot Pct | Upper | Back | Chest | Elbow | Knee | Lower | Abdomen | Whole | Pelvic | Row Total |
|-----------------|--|----------|------|-------|-------|------|----------|---------|-----------|----------|--------------|
| | | Arm A | B | C | E | K | Leg L | M | Body O | Hip P | |
| None | 20 | 18 | 61 | 30 | 85 | 48 | 33 | 2 | 34 | 589 | |
| | 3.4 | 3.1 | 10.4 | 5.1 | 14.4 | 8.1 | 5.6 | 0.3 | 5.8 | 86.0 | |
| | 80.0 | 81.8 | 96.8 | 75.0 | 83.3 | 85.7 | 94.3 | 100.0 | 77.3 | | |
| | 2.9 | 2.6 | 8.9 | 4.4 | 12.4 | 7.0 | 4.8 | 0.3 | 5.0 | | |
| Yes | 5 | 4 | 2 | 10 | 17 | 8 | 2 | 0 | 10 | 96 | |
| | 5.2 | 4.2 | 2.1 | 10.4 | 17.7 | 8.3 | 2.1 | 0.0 | 10.4 | 14.0 | |
| | 20.0 | 18.2 | 3.2 | 25.0 | 16.7 | 14.3 | 5.7 | 0.0 | 22.7 | | |
| | 0.7 | 0.6 | 0.3 | 1.5 | 2.5 | 1.2 | 0.3 | 0.0 | 1.5 | | |
| Column Total | 25 | 22 | 63 | 40 | 102 | 56 | 35 | 2 | 44 | 685 | |
| | 3.6 | 3.2 | 9.2 | 5.8 | 14.9 | 8.2 | 5.1 | 0.3 | 6.4 | 100.0 | |

| Crashbar | Count Row Pct Col Pct Tot Pct | Ankle | Forearm | Shoulders | Thigh | Unknown | Wrist/ Hand | Upper | Trunk | Row Total |
|-----------------|--|-----------|---------|-----------|-------|---------|----------------|------------------|-------|--------------|
| | | Foot Q | R | S | T | U | W | Extremities X | Y | |
| None | 41 | 51 | 41 | 28 | 1 | 95 | 0 | 1 | 589 | |
| | 7.0 | 8.7 | 7.0 | 4.8 | 0.2 | 16.1 | 0.0 | 0.2 | 86.0 | |
| | 87.2 | 86.4 | 83.7 | 82.4 | 100.0 | 92.2 | 0.0 | 50.0 | | |
| | 6.0 | 7.4 | 6.0 | 4.1 | 0.1 | 13.9 | 0.0 | 0.1 | | |
| Yes | 6 | 8 | 8 | 6 | 0 | 8 | 1 | 1 | 96 | |
| | 6.3 | 8.3 | 8.3 | 6.3 | 0.0 | 8.3 | 1.0 | 1.0 | 14.0 | |
| | 12.8 | 13.6 | 16.3 | 17.6 | 0.0 | 7.8 | 100.0 | 50.0 | | |
| | 0.9 | 1.2 | 1.2 | 0.9 | 0.0 | 1.2 | 0.1 | 0.1 | | |
| Column Total | 47 | 59 | 49 | 34 | 1 | 103 | 1 | 2 | 685 | |
| | 6.9 | 8.6 | 7.2 | 5.0 | 0.1 | 15.0 | 0.1 | 0.3 | 100.0 | |

TABLE 6.12.13. SINGLE VEHICLE SOMATIC INJURY SEVERITY (OSIDs)

| Crashbar | Count Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Serious | Critical | Fatal | Row Total |
|-----------------|--|-------|----------|--------|---------|----------|-------|--------------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | |
| | 437 | 90 | 33 | 17 | 10 | 2 | 589 | |
| | 74.2 | 15.3 | 5.6 | 2.9 | 1.7 | 0.3 | 86.0 | |
| | 84.2 | 88.2 | 97.1 | 94.4 | 100.0 | 100.0 | | |
| | 63.8 | 13.1 | 4.8 | 2.5 | 1.5 | 0.3 | | |
| | 82 | 12 | 1 | 1 | 0 | 0 | 96 | |
| | 85.4 | 12.5 | 1.0 | 1.0 | 0.0 | 0.0 | 14.0 | |
| | 15.8 | 11.8 | 2.9 | 5.6 | 0.0 | 0.0 | | |
| | 12.0 | 1.8 | 0.1 | 0.1 | 0.0 | 0.0 | | |
| Column Total | 519 | 102 | 34 | 18 | 10 | 2 | 685 | |
| | 75.8 | 14.9 | 5.0 | 2.6 | 1.5 | 0.3 | 100.0 | |

TABLE 6.12.14. MULTIPLE VEHICLE SOMATIC INJURY DISTRIBUTION (OSIDs)

| Crashbar | Count Row Pct Col Pct Tot Pct | Upper | Back | Chest | Elbow | Knee | Lower | Abdomen | Whole | Pelvic | Row Total |
|-----------------|--|----------|------|-------|-------|------|----------|---------|-----------|---------------|--------------|
| | | Arm A | B | C | E | K | Leg L | M | Body O | Hip P | |
| None | 61 | 85 | 109 | 109 | 259 | 288 | 144 | 3 | 100 | 1881 81.1 | |
| | 3.2 | 4.5 | 5.8 | 5.8 | 13.8 | 15.3 | 7.7 | 0.2 | 5.3 | | |
| | 83.6 | 77.3 | 75.7 | 85.8 | 78.7 | 79.1 | 80.4 | 100.0 | 76.9 | | |
| | 2.6 | 3.7 | 4.7 | 4.7 | 11.2 | 12.4 | 6.2 | 0.1 | 4.3 | | |
| Yes | 12 | 25 | 35 | 18 | 70 | 76 | 35 | 0 | 30 | 438 18.9 | |
| | 2.7 | 5.7 | 8.0 | 4.1 | 16.0 | 17.4 | 8.0 | 0.0 | 6.8 | | |
| | 16.4 | 22.7 | 24.3 | 14.2 | 21.3 | 20.9 | 19.6 | 0.0 | 23.1 | | |
| | 0.5 | 1.1 | 1.5 | 0.8 | 3.0 | 3.3 | 1.5 | 0.0 | 1.3 | | |
| Column Total | 73 | 110 | 144 | 127 | 329 | 364 | 179 | 3 | 130 | 2319 100.0 | |
| | 3.1 | 4.7 | 6.2 | 5.5 | 14.2 | 15.7 | 7.7 | 0.1 | 5.6 | | |

| Crashbar | Count Row Pct Col Pct Tot Pct | Ankle | Forearm | Shoulders | Thigh | Unknown | Wrist/ Hand | Upper | Trunk | Row Total |
|-----------------|--|-----------|---------|-----------|-------|---------|----------------|------------------|---------------|--------------|
| | | Foot Q | R | S | T | U | W | Extremities X | Y | |
| None | 191 | 96 | 88 | 141 | 2 | 199 | 4 | 2 | 1881 81.1 | |
| | 10.2 | 5.1 | 4.7 | 7.5 | 0.1 | 10.6 | 0.2 | 0.1 | | |
| | 91.4 | 84.2 | 78.6 | 80.1 | 66.7 | 83.6 | 80.0 | 66.7 | | |
| | 8.2 | 4.1 | 3.8 | 6.1 | 0.1 | 8.6 | 0.2 | 0.1 | | |
| Yes | 18 | 18 | 24 | 35 | 1 | 39 | 1 | 1 | 438 18.9 | |
| | 4.1 | 4.1 | 5.5 | 8.0 | 0.2 | 8.9 | 0.2 | 0.2 | | |
| | 8.6 | 15.8 | 21.4 | 19.9 | 33.3 | 16.4 | 20.0 | 33.3 | | |
| | 0.8 | 0.8 | 1.0 | 1.5 | 0.0 | 1.7 | 0.0 | 0.0 | | |
| Column Total | 209 | 114 | 112 | 176 | 3 | 238 | 5 | 3 | 2319 100.0 | |
| | 9.0 | 4.9 | 4.8 | 7.6 | 0.1 | 10.3 | 0.2 | 0.1 | | |

TABLE 6.12.15. MULTIPLE VEHICLE SOMATIC INJURY SEVERITY (OSIDs)

| Crashbar | Count Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Serious | Critical | Fatal | Unknown | Row Total |
|-----------------|--|-------|----------|--------|---------|----------|-------|---------------|--------------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 8 | |
| None | 1418 | 229 | 135 | 67 | 23 | a | 1 | 1881 81.1 | |
| | 75.4 | 12.2 | 7.2 | 3.6 | 1.2 | 0.4 | 0.1 | | |
| | 81.6 | 81.8 | 75.0 | 82.7 | 76.7 | 80.0 | 100.0 | | |
| | 61.1 | 9.9 | 5.8 | 2.9 | 1.0 | 0.3 | 0.0 | | |
| Yes | 319 | 51 | 45 | 14 | 7 | 2 | 0 | 438 18.9 | |
| | 72.8 | 11.6 | 10.3 | 3.2 | 1.6 | 0.5 | 0.0 | | |
| | 18.4 | 18.2 | 25.0 | 17.3 | 23.3 | 20.0 | 0.0 | | |
| | 13.8 | 2.2 | 1.9 | 0.6 | 0.3 | 0.1 | 0.0 | | |
| Column Total | 1737 | 280 | 180 | 81 | 30 | 10 | 1 | 2319 100.0 | |
| | 74.9 | 12.1 | 7.8 | 3.5 | 1.3 | 0.4 | 0.0 | | |

The evaluation of the mechanical condition of the motorcycle showed no significant relation to accident causation. For example, tire condition was evaluated as "poor" or "fair" for less than 10% of the tires examined on the accident-involved motorcycles. All but two cases were unrelated to accident causation; one case involved an ineffective repair of a **previous puncture** flat and the other **case** involved a defective butt splice in a tube which caused an (undetected) slow leak and eventual flat.

The system of the motorcycle were without failure and without contribution to accident causation. **There were no** cases of exploding batteries, electrical failures at night, engine or transmission failures, waterlogged brake surface, or "stuck" throttles. In two **cases** the riders stated that a "stuck" throttle caused them to lose control and run wide on a turn. A thorough investigation of the accident circumstances and detailed examination of the motorcycle proved these contentions to be false and simply inaccurate reconstructions by the rider.

Vehicle dynamics problems of "speed wobbles" or "**weaves**" were clearly attributable to an obvious maintenance defect or more fundamental rider control problems. i.e., rides lost **wheelie** or ran wide on a turn and ran off the road.

Mirrors were never criticized directly by the rider as accident related in performance or function. Evaluation of the accident events showed that detection of hazards by mirrors was not a factor in those very few accidents where the hazard was in that rearward direction.

Turn signals did **not** contribute adversely in any way.

Kill switches or kill buttons had no favorable or unfavorable contribution in the accident events.

The motorcycle horn has little function or favor in the precrash events. Table 6.13.1 shows that the motorcycle horn is rarely used in an attempt to ward off the hazard (6.7%). When the horn is needed, it is usually a feeble aural message that fails in warning. For example, the motorcycle in a traffic lane **stops** behind a van stopped at a traffic signal. The van has intruded into an occupied crosswalk and backs up to the distress of the motorcycle rider. Frantic use of the weak horn and rapid paddling backwards do not prevent a low energy collision contact.

TABLE 6.13.1. MOTORCYCLE HORN USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------------|-----------|--------------------|------------------------|------------------------|
| <u>Did MC Use Horn to Warn OV?</u> | | | | |
| Yes | 1. | 47 | 5.2 | 6.7 |
| No | 2. | 656 | 72.9 | 93.3 |
| Unknown | a. | 38 | 4.2 | Missing |
| Not Applicable | 9. | 159 | 17.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

A review of the 3600 police traffic accident cases showed a contrast in the evaluation of vehicle defects. Table 6.13.2 shows that 8.2% of the motorcycles were judged defective. Of course, those cases with obvious puncture flats were appropriately included but an extraordinary number of cases included motorcycles with tires judged to have inadequate tread depth. A cross check between the 900 on-scene, in-depth cases showed this judgment to be unqualified and also unrelated to the accident events and accident causation. There was no credibility established for the evaluation of defects by the traffic accident reports.

TABLE 6.13.2. MOTORCYCLE CONDITION (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|
| OK | 1. | 2939 | 81.6 | 91.8 |
| Defective | 2. | 264 | 7.3 | 9.2 |
| Unknown | 3. | 397 | 11.0 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

6.14 Other Vehicle Involved in the Accident with the Motorcycle

Table 6.14.1 shows the object in collision contact with the motorcycle for the on-scene, in-depth accident cases. Those data are shown for the 900 cases then for the 54 fatal **cases** within the basic data. The involvement with other motorcycles was exclusively in parallel paths with low energy contact but **subsequent** loss of control by the motorcycle rider.

Table 6.14.2 (Appendix C.2) shows the manufacturer of the automobile involved in collision contact with the motorcycle.

Table 6.14.3 (Appendix C.2) shows the model type for the 900 on-scene, in-depth accident cases.

Table 6.14.4 (Appendix C.2) presents the vehicle size information for both the 900 on-scene, in-depth accident **cases** and the 3600 traffic accident reports.

Table 6.14.5 (Appendix C.2) shows the collision **contact** points (not necessarily injury surfaces) on the other vehicle Involved in collision with the **motorcycle**. Certain areas of collision contact are **summarized** as follows:

Front and Front Corner

| | |
|-------------|---|
| XF01 | 121 |
| xFo3 | 61 |
| XS01 | 21 |
| xso3 | <u>44</u> |
| TOTAL | 247 (36.9% of multiple vehicle accidents) |

Side Fender, Door & Pillars

| | |
|-------------|---|
| XS02 | 65 |
| XS06 | 59 |
| XS12 | 10 |
| xs14 | <u>49</u> |
| TOTAL | 183 (27.3% of multiple vehicle accidents) |

Tires, Wheels & Undercarriage

| | |
|-------------|---|
| XS21 | 29 |
| XB27 | 2 |
| XS27 | <u>4</u> |
| TOTAL | 35 (5.2% of multiple vehicle accidents) |

Other Motorcycles, Own Handlebars, Forks, Front Wheel

| | |
|-------------|--|
| MC05 | 4 |
| MC08 | <u>1</u> |
| MC11 | <u>4</u> |
| TOTAL | 9 (37.5% of the 24 contacts with M/C components) |

TABLE 6.14.1. OBJECT STRUCK BY MOTORCYCLE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| OSIDs | | | | |
| Passenger Car | 1. | 588 | 65.3 | 65.3 |
| Other Motorcycle | 2. | 27 | 3.0 | 3.0 |
| Fixed Object | 3. | 40 | 4.4 | 4.4 |
| Animal | 4. | 8 | 0.9 | 0.9 |
| Roadway | 5. | 172 | 19.1 | 19.1 |
| Other 4-Wheel Vehicle | 6. | 48 | 5.3 | 5.3 |
| Other | 7. | 17 | 1.9 | 1.9 |
| | TOTAL | 900 | 100.0 | 100.0 |
| Fatal OSIDs Only | | | | |
| Passenger car | 1. | 27 | 50.0 | 50.0 |
| Other Motorcycle | 2. | 4 | 7.4 | 7.4 |
| Fixed Object | 3. | 11 | 20.4 | 20.4 |
| Roadway | 5. | 7 | 13.0 | 13.0 |
| Other 4-Wheel Vehicle | 6. | 5 | 9.3 | 9.3 |
| | TOTAL | 54 | 100.0 | 100.0 |

7.0 MOTORCYCLE RIDER, PASSENGER, AND OTHER VEHICLE DRIVER CHARACTERISTICS

This section deals with the human factors involved in the motorcycle accidents. The general data describe the characteristics of the motorcycle rider, i.e., age, experience, license, training, education, height, weight, etc. In addition, there **are** included **more** specific data synthesized or collected which relates to the collision avoidance performance of the motorcycle rider, e.g., front brake use, collision avoidance decisions, time for collision avoidance, alcohol and drug involvement, etc. Of course, it is expected that any rider involved in an accident did not demonstrate success in collision avoidance performance, and the data collected here attempt to define and describe the errors made by the motorcycle rider in those precrash events.

7.1 Motorcycle Rider Age

Rider age distributions **were** determined for three groups of data.

Table 7.1.1 shows the distribution of motorcycle rider age for the 900 on-scene, in-depth accident investigation cases. The median age is 24.8 years, and the age group of 17 through 26 is 54.8% of the accident-involved riders.

Table 7.1.2 shows the distribution of motorcycle **rider age** for the 54 fatalities of the 900 on-scene, in-depth accident cases. The median age is 26 and the age group of 17 through 26 is 50.X of the fatally injured motorcycle riders.

Table 7.1.3 shows the motorcycle rider age from the 3600 traffic accident reports analyzed. The median age is 22.9 years and the age group of 17 **through** 26 is 62.6% of the accident-involved riders.

7.2 Motorcycle Rider Sex, Marital Status, Children

Table 7.2.1 (Appendix C.3) shows that the male motorcycle riders are 96.2% of the total; female riders are 3.8% of the 900 on-scene, in-depth cases. Analysis of the 3600 traffic accident reports shows female riders were 2.9% of that accident population.

The one case of the on-scene, in-depth investigations where rider sex was unknown was a Hollywood moped rider.

Table 7.2.2 (Appendix C.3) shows the marital status of the motorcycle rider for the 900 on-scene, in-depth accident cases.

Table 7.2.3 (Appendix C.3) shows the number of children for the **accident-**involved motorcycle rider.

TABLE 7.1.1. MOTORCYCLE RIDW AGE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Age, Years | 9. | 1 | 0.1 | 0.1 | 0.1 |
| | 12. | 2 | 0.2 | 0.2 | 0.3 |
| | 13. | 1 | 0.1 | 0.1 | 0.4 |
| | 14. | 2 | 0.2 | 0.2 | 0.7 |
| | 15. | 3 | 0.3 | 0.3 | 1.0 |
| | 16. | 5 | 0.6 | 0.6 | 1.6 |
| | 17. | 21 | 2.3 | 2.3 | 3.9 |
| | 18. | 36 | 4.0 | 4.0 | 7.9 |
| | 19. | 36 | 4.0 | 4.0 | 11.9 |
| | 20. | 62 | 6.9 | 6.9 | 18.8 |
| | 21. | 64 | 7.1 | 7.1 | 25.9 |
| | 22. | 63 | 7.0 | 7.0 | 32.9 |
| | 23. | 58 | 6.4 | 6.4 | 39.3 |
| | 24. | 52 | 5.8 | 5.8 | 45.1 |
| | 25. | 56 | 6.2 | 6.2 | 51.3 |
| | 26. | 46 | 5.1 | 5.1 | 56.4 |
| | 27. | 42 | 4.7 | 4.7 | 61.1 |
| | 28. | 35 | 3.9 | 3.9 | 65.0 |
| | 29. | 31 | 3.4 | 3.4 | 68.4 |
| | 30. | 36 | 4.0 | 4.0 | 72.4 |
| | 31. | 21 | 2.3 | 2.3 | 74.8 |
| | 32. | 19 | 2.1 | 2.1 | 76.9 |
| | 33. | 26 | 2.9 | 2.9 | 79.8 |
| | 34. | 19 | 2.1 | 2.1 | 81.9 |
| | 35. | 12 | 1.3 | 1.3 | 83.2 |
| | 36. | 19 | 2.1 | 2.1 | 85.3 |
| | 37. | 19 | 2.1 | 2.1 | 87.4 |
| | 38. | 10 | 1.1 | 1.1 | 88.6 |
| | 39. | 7 | 0.8 | 0.8 | 89.3 |
| | 40. | 10 | 1.1 | 1.1 | 90.4 |
| | 41. | 1 | 0.1 | 0.1 | 90.6 |
| | 42. | 7 | 0.8 | 0.8 | 91.3 |
| | 43. | 5 | 0.6 | 0.6 | 91.9 |
| | 44. | 6 | 0.7 | 0.7 | 92.6 |
| | 45. | 2 | 0.2 | 0.2 | 92.8 |
| | 46. | 6 | 0.7 | 0.7 | 93.4 |
| | 47. | 5 | 0.6 | 0.6 | 94.0 |
| | 48. | 3 | 0.3 | 0.3 | 94.3 |
| | 49. | 6 | 0.7 | 0.7 | 95.0 |
| | 50. | 1 | 0.1 | 0.1 | 95.1 |
| | 51. | 3 | 0.3 | 0.3 | 95.4 |
| | 52. | 1 | 0.1 | 0.1 | 95.6 |
| | 53. | 5 | 0.6 | 0.6 | 96.1 |
| | 54. | 3 | 0.3 | 0.3 | 96.4 |
| | 55. | 5 | 0.6 | 0.6 | 97.0 |
| | 56. | 4 | 0.4 | 0.4 | 97.4 |
| | 57. | 1 | 0.1 | 0.1 | 97.6 |
| | 58. | 1 | 0.1 | 0.1 | 97.7 |
| 59. | 2 | 0.2 | 0.2 | 97.9 | |
| 61. | 1 | 0.1 | 0.1 | 98.1 | |
| 62. | 1 | 0.1 | 0.1 | 98.2 | |
| 64. | 3 | 0.3 | 0.3 | 98.6 | |
| 66. | 2 | 0.2 | 0.2 | 98.8 | |
| 70. | 1 | 0.1 | 0.1 | 96.9 | |
| 75. | 1 | 0.1 | 0.1 | 99.0 | |
| Unknown | 98. | 9 | 1.0 | 1.0 | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.1.2. MOTORCYCLE RIDER AGE, FATAL CASES (OSID FATALS ONLY)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|------------|--------------------|------------------------|------------------------|--------------------------|
| Age, Years | 18. | 2 | 3.7 | 3.7 | 3.7 |
| | 19. | 1 | 1.9 | 1.9 | 5.6 |
| | 20. | 4 | 7.4 | 7.4 | 13.0 |
| | 21. | 4 | 7.4 | 7.4 | 20.4 |
| | 22. | 1 | 1.9 | 1.9 | 22.2 |
| | 23. | 4 | 7.4 | 7.4 | 29.6 |
| | 24. | 3 | 5.6 | 5.6 | 35.2 |
| | 25. | 5 | 9.3 | 9.3 | 44.4 |
| | 26. | 3 | 5.6 | 5.6 | 50.0 |
| | 28. | 1 | 1.9 | 1.9 | 51.9 |
| | 29. | 1 | 1.9 | 1.9 | 53.7 |
| | 30. | 3 | 5.6 | 5.6 | 59.3 |
| | 31. | 1 | 1.9 | 1.9 | 61.1 |
| | 32. | 2 | 3.7 | 3.7 | 64.8 |
| | 33. | 3 | 5.6 | 5.6 | 70.4 |
| | 34. | 2 | 3.7 | 3.7 | 74.1 |
| | 35. | 2 | 3.7 | 3.7 | 77.8 |
| | 36. | 1 | 1.9 | 1.9 | 79.6 |
| | 38. | 1 | 1.9 | 1.9 | 81.5 |
| | 42. | 2 | 3.7 | 3.7 | 85.2 |
| 44. | 2 | 3.7 | 3.7 | 88.9 | |
| 49. | 1 | 1.9 | 1.9 | 90.7 | |
| 56. | 2 | 3.7 | 3.7 | 94.4 | |
| 70. | 1 | 1.9 | 1.9 | 96.3 | |
| 75. | 1 | 1.9 | 1.9 | 98.1 | |
| Unknown | 98. | 1 | 1.9 | 1.9 | 100.0 |
| | TOTAL | 54 | 100.0 | 100.0 | |

TABLE 7.1.3. MOTORCYCLE RIDER AGE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Age, Years | 10. | 2 | 0.1 | 0.1 | 0.1 |
| | 11. | 1 | 0.0 | 0.0 | 0.1 |
| | 12. | 3 | 0.1 | 0.1 | 0.2 |
| | 13. | 6 | 0.2 | 0.2 | 0.3 |
| | 14. | 11 | 0.3 | 0.3 | 0.7 |
| | 15. | 22 | 0.6 | 0.6 | 1.3 |
| | 16. | 62 | 1.7 | 1.8 | 3.1 |
| | 17. | 149 | 4.1 | 4.3 | 7.3 |
| | 18. | 207 | 5.7 | 5.9 | 13.2 |
| | 19. | 279 | 7.7 | 8.0 | 21.2 |
| | 20. | 270 | 7.5 | 7.7 | 28.9 |
| | 21. | 256 | 7.1 | 7.3 | 36.2 |
| | 22. | 272 | 7.6 | 7.8 | 44.0 |
| | 23. | 231 | 6.4 | 6.6 | 50.6 |
| | 24. | 173 | 4.8 | 4.9 | 55.5 |
| | 25. | 191 | 5.3 | 5.5 | 60.9 |
| | 26. | 160 | 4.4 | 4.6 | 65.5 |
| | 27. | 115 | 3.2 | 3.3 | 68.8 |
| | 28. | 125 | 3.5 | 3.6 | 72.4 |
| | 29. | 121 | 3.4 | 3.5 | 75.8 |
| | 30. | 107 | 3.0 | 3.1 | 78.9 |
| | 31. | 88 | 2.4 | 2.5 | 81.4 |
| | 32. | 67 | 1.9 | 1.9 | 83.3 |
| | 33. | 68 | 1.9 | 1.9 | 85.2 |
| | 34. | 51 | 1.4 | 1.5 | 86.7 |
| | 35. | 59 | 1.6 | 1.7 | 88.4 |
| | 36. | 46 | 1.3 | 1.3 | 89.7 |
| | 37. | 35 | 1.0 | 1.0 | 90.7 |
| | 38. | 29 | 0.8 | 0.8 | 91.5 |
| | 39. | 27 | 0.7 | 0.8 | 92.3 |
| | 40. | 28 | 0.8 | 0.8 | 93.1 |
| | 41. | 20 | 0.6 | 0.6 | 93.7 |
| | 42. | 11 | 0.3 | 0.3 | 94.0 |
| | 43. | 23 | 0.6 | 0.7 | 94.6 |
| | 44. | 15 | 0.4 | 0.4 | 95.1 |
| | 45. | 14 | 0.4 | 0.4 | 95.5 |
| | 46. | 18 | 0.5 | 0.5 | 96.0 |
| | 47. | 11 | 0.3 | 0.3 | 96.3 |
| | 48. | 14 | 0.4 | 0.4 | 96.7 |
| | 49. | 16 | 0.4 | 0.5 | 97.1 |
| | 50. | 9 | 0.2 | 0.3 | 97.4 |
| | 51. | 4 | 0.1 | 0.1 | 97.5 |
| | 52. | 14 | 0.4 | 0.4 | 97.9 |
| | 53. | 11 | 0.3 | 0.3 | 98.2 |
| | 54. | 13 | 0.4 | 0.4 | 98.6 |
| | 55. | 9 | 0.2 | 0.3 | 98.9 |
| | 56. | 2 | 0.1 | 0.1 | 98.9 |
| | 57. | 7 | 0.2 | 0.2 | 99.1 |
| 58. | 7 | 0.2 | 0.2 | 99.3 | |
| 59. | 5 | 0.1 | 0.1 | 99.5 | |
| 60. | 4 | 0.1 | 0.1 | 99.6 | |
| 61. | 3 | 0.1 | 0.1 | 99.7 | |
| 62. | 1 | 0.0 | 0.1 | 99.7 | |
| 63. | 3 | 0.1 | 0.1 | 99.8 | |
| 64. | 2 | 0.1 | 0.1 | 99.8 | |
| 65. | 2 | 0.1 | 0.1 | 99.9 | |
| 66. | 1 | 0.0 | 0.0 | 99.9 | |
| 77. | 1 | 0.0 | 0.0 | 99.9 | |
| 78. | 2 | 0.1 | 0.1 | 100.0 | |
| Unknown | 98. | 97 | 2.7 | Missing | 100.0 |
| | TOTAL | 3600 | 100.0 | 100.0 | |

7.3 Motorcycle Rider Height and Weight

Table 7.3.1 (Appendix C.3) shows the height distribution for the accident-involved motorcycle riders. The median height is 69.2 inches.

Table 7.3.2 (Appendix C.3) shows the weight distribution for the accident-involved motorcycle riders. The median weight is 159.4 pounds.

7.4 Motorcycle Rider Occupation and Education

Table 7.4.1 shows the occupations of the 900 motorcycle riders in the on-scene, in-depth accident cases. Students are the largest component, (21.2%), and craftsmen (17.7%) and laborers (15.8%) combined to represent one-third of the total. The unemployed group (10.5%) was approximately representative of the local employment situation, and most of these unemployed were laborers or craftsmen when employed.

TABLE 7.4.1. RIDER OCCUPATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-------|--------------------|------------------------|------------------------|
| Professional | 2. | 64 | 7.1 | 7.3 |
| Mgr., Administrator | 3. | 24 | 2.7 | 2.7 |
| Sales Worker | | 13 | 1.4 | 1.5 |
| Clerical | 4. | 62 | 6.9 | 7.1 |
| Craftsman | 5. | 155 | 17.2 | 17.7 |
| Operatives, Non-Trans. | 6. | 8 | 0.9 | 0.9 |
| Transport Operatives | 7. | 27 | 3.0 | 3.1 |
| Laborers | 8. | 138 | 15.3 | 15.8 |
| Service Workers | 11. | 85 | 9.4 | 9.7 |
| Housewife | 13. | 3 | 0.3 | 0.3 |
| Student | 14. | 185 | 20.6 | 21.2 |
| Military | 15. | 13 | 1.4 | 1.5 |
| Retired | 16. | 5 | 0.6 | 0.6 |
| Unemployed | 17. | 92 | 10.2 | 10.5 |
| Unknown | 98. | 26 | 2.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.4.2 shows the equivalent information obtained from the examination of the 3600 police traffic accident reports.

Table 7.4.3 shows the educational background for the motorcycle riders in the 900 on-scene, in-depth accident cases.

The characteristics from the on-scene, in-depth data are agreeable with the traffic accident report data, except for the unknown data of the traffic accident reports.

TABLE 7.4.2. MOTORCYCLE RIDER OCCUPATION (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------------|--------------|--------------------|------------------------|------------------------|
| Professional | 1. | 184 | 5.1 | 7.8 |
| Administrator | 2. | 116 | 3.2 | 4.9 |
| Sales Worker | 3. | 62 | 1.7 | 2.6 |
| Clerical | 4. | 121 | 3.4 | 5.2 |
| Craftman | 5. | 312 | a.7 | 13.3 |
| Operatives | 6. | 64 | 1.8 | 2.7 |
| Tran-Equip Operative | 7. | 92 | 2.6 | 3.9 |
| Laborers | a. | 433 | 12.0 | 18.5 |
| Farmers | 9. | 1 | 0.0 | 0.0 |
| Farm Laborers | 10. | 4 | 0.1 | 0.2 |
| Service Worker | 11. | 283 | 7.9 | 12.1 |
| Household Worker | 12. | 1 | 0.0 | 0.0 |
| Housewife | 13. | 8 | 0.2 | 0.3 |
| Student | 14. | 486 | 13.5 | 20.7 |
| Military | 15. | 16 | 0.4 | 0.7 |
| Retired | 16. | 5 | 0.1 | 0.2 |
| Unemployed | 17. | 156 | 4.3 | 6.7 |
| Unknown-Not Reported | 98. | 1256 | 34.9 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 7.4.3. RIDER EDUCATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|--------------|--------------------|------------------------|------------------------|
| | | 23 | | |
| Graduate School | 1. | 43 | 2.6 4.8 | 5.2 2.6 |
| College Graduate | 2. | | | |
| Partial College | 3. | 297 | 33.0 | 35.9 |
| High School Graduate | 4. | 230 | 25.6 | 27.8 |
| Partial High School | 5. | 203 | 22.6 | 24.5 |
| Junior High School | 6. | 17 | 1.9 | 2.1 |
| Less Than 7 Years | 7. | 14 | 1.6 | 1.7 |
| Unknown | a. | 73 | 8.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.4.4 shows the **Hollingshead** Index of Social Position computed for the 900 motorcycle riders. Almost one-fifth of the cases shown are "unknown" because of the difficulty of obtaining financial information. Also, because of the sensitivity of such questioning by the interviewer, low priority was assigned to this information.

TABLE 7.4.4. RIDER INDEX OF SOCIAL POSITION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Class I 11-17 | 1. | 11 | 1.2 | 1.7 | 1.7 |
| Class II 11-27 | 2. | 38 | 4.2 | 6.0 | 7.8 |
| Class III 28-43 | 3. | 103 | 11.4 | 16.3 | 24.1 |
| Class IV 44-60 | 4. | 275 | 30.6 | 43.5 | 67.6 |
| Class V 61-77 | 5. | 205 | 22.8 | 32.4 | 100.0 |
| Unknown | a. | 270 | 19.8 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

7.5 Motorcycle Rider License Qualification

Table 7.5.1 shows the license qualification for the 900 motorcycle riders in the 900 on-scene, in-depth accident cases. The standard motorcycle license endorsement or permit was held by 54.5% of **these** motorcyclists; 10.1% had no license or permit of any sort, 30.6% had an operator's license for other vehicles but no motorcycle license endorsement. and 1.8% were operating **with** a license revoked because of cumulative violation experience.

Also shown in Table 7.5.1 are the equivalent data developed from review of the 3600 police traffic accident reports.

Table 7.5.2 compares motorcycle rider license qualification with the accident precipitating factor **for** the 900 on-scene, in-depth accident cases. Those accidents involving motorcycle rider error show the extra participation of those riders without the motorcycle **license endorsement**.

Table 7.5.3 (Appendix C.3) shows the state of issue of the driver license for the 900 accident cases. Out-of-state drivers (32) were 3.4% of those cases.

7.6 Motorcycle Rider Traffic Violation and Accident Experience

Table 7.6.1 shows the recent previous traffic violation experience for the motorcycle riders involved in the 900 on-scene, in-depth accident cases. **Also** included is the violation experience for the 54 fatal cases within the 900 accidents.

TABLE 7.5.1. CLASS OF RIDER DRIVER LICENSE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-------|--------------------|------------------------|------------------------|
| None | 0. | 90 | 10.0 | 10.1 |
| Class 1 - Commercial | 1. | 14 | 1.6 | 1.6 |
| Class 2 - Chauffeur | 2. | 1 | 0.1 | 0.1 |
| Class 3 - Standard | 3. | 256 | 28.4 | 28.9 |
| Class 4 - Motorcycle | 4. | 483 | 53.7 | 54.5 |
| Learner Permit | 5. | 27 | 3.0 | 3.0 |
| Class 3 - Revoked | 6. | 14 | 1.6 | 1.6 |
| Class 4 - Revoked | 7. | 2 | 0.2 | 0.2 |
| Unknown | a. | 13 | 1.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Driver License Motorcycle Qualified (TARs) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| Yes | 1. | 1589 | 44.1 | 49.2 |
| NO | 2. | 1075 | 29.9 | 33.3 |
| | | 96 | 2.7 | 3.0 |
| Unknown Only Reported | a. | 467 | 13.0 | 14.5 |
| N.A., No License | 9. | 373 | 10.4 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 7.5.2. ACCIDENT PRECIPITATING FACTOR BY RIDER DRIVERS LICENSE (OSIDs)

| Factor | Count Row Pct Col Pct Tot Pct | Rider License | | | | | Learner Permit | Class 3 Revoked | Class 4 Revoked | Row Total |
|---------------------------------------|--|---------------|---------|---------|---------|---------|-------------------|--------------------|--------------------|--------------|
| | | None | Class X | Class 1 | Class 3 | Class 4 | | | | |
| Phantom Vehicle | 0 | 0 | 0 | 2 | 2 | 0 | 0 | 0 | 4 | |
| | 0.0 | 0.0 | 0.0 | 50.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.5 | |
| | 0.0 | 0.0 | 0.0 | 0.8 | 0.4 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.0 | 0.2 | 0.2 | 0.0 | 0.0 | 0.0 | | |
| MC Error | 53 | 2 | 0 | 115 | 165 | 17 | 8 | 1 | 361 | |
| | 14.7 | 0.6 | 0.0 | 31.9 | 45.7 | 4.7 | 2.2 | 0.3 | 40.7 | |
| | 58.9 | 14.3 | 0.0 | 44.9 | 34.2 | 63.0 | 57.1 | 50.0 | | |
| | 6.0 | 0.2 | 0.0 | 13.0 | 18.6 | 1.9 | 0.9 | 0.1 | | |
| OV Violation of MC Right of Way | 33 | 11 | 0 | 123 | 270 | 9 | 6 | 1 | 453 | |
| | 7.3 | 2.4 | 0.0 | 27.2 | 59.6 | 2.0 | 1.3 | 0.2 | 51.1 | |
| | 36.7 | 78.6 | 0.0 | 48.0 | 56.0 | 33.3 | 42.9 | 50.0 | | |
| | 3.7 | 1.2 | 0.0 | 13.9 | 30.5 | 1.0 | 0.7 | 0.1 | | |
| Roadway Defect | 2 | 0 | 0 | 5 | 10 | 1 | 0 | 0 | 18 | |
| | 11.1 | 0.0 | 0.0 | 27.8 | 55.6 | 5.6 | 0.0 | 0.0 | 2.0 | |
| | 2.2 | 0.0 | 0.0 | 2.0 | 2.1 | 3.7 | 0.0 | 0.0 | | |
| | 0.2 | 0.0 | 0.0 | 0.6 | 1.1 | 0.1 | 0.0 | 0.0 | | |
| Pedestrian | 0 | 0 | 0 | 0 | 5 | 0 | 0 | 0 | 5 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.6 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.6 | 0.0 | 0.0 | 0.0 | | |
| Animal | 1 | 0 | 0 | 2 | 7 | 0 | 0 | 0 | 10 | |
| | 10.0 | 0.0 | 0.0 | 20.0 | 70.0 | 0.0 | 0.0 | 0.0 | 1.1 | |
| | 1.1 | 0.0 | 0.0 | 0.8 | 1.5 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.0 | 0.2 | 0.8 | 0.0 | 0.0 | 0.0 | | |
| Vehicle Failure | 0 | 1 | 0 | 7 | 16 | 0 | 0 | 0 | 24 | |
| | 0.0 | 4.2 | 0.0 | 29.2 | 66.7 | 0.0 | 0.0 | 0.0 | 2.7 | |
| | 0.0 | 7.1 | 0.0 | 2.7 | 3.3 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.1 | 0.0 | 0.8 | 1.8 | 0.0 | 0.0 | 0.0 | | |
| Other | 1 | 0 | 1 | 2 | 7 | 0 | 0 | 0 | 11 | |
| | 9.1 | 0.0 | 9.1 | 18.2 | 63.6 | 0.0 | 0.0 | 0.0 | 1.2 | |
| | 1.1 | 0.0 | 100.0 | 0.8 | 1.5 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.1 | 0.2 | 0.8 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 90 | 14 | 1 | 256 | 482 | 27 | 14 | 2 | 886 | |
| | 10.2 | 1.6 | 0.1 | 28.9 | 54.4 | 3.0 | 1.6 | 0.2 | 100.0 | |

TABLE 7.6.1. NUMBER OF RIDER VIOLATIONS LAST 2 YEARS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|--------------|--------------------|------------------------|------------------------|--------------------------|
| Violations | 0. | 325 | 36.1 | 38.6 | 38.6 |
| | 1. | 217 | 24.1 | 25.8 | 64.4 |
| | 2. | 129 | 14.3 | 15.3 | 79.8 |
| | 3. | 68 | 7.6 | 8.1 | 87.9 |
| | 4. | 38 | 4.2 | 4.5 | 92.4 |
| | 5. | 23 | 2.6 | 2.7 | 95.1 |
| | 6. | 14 | 1.6 | 1.7 | 96.8 |
| 7 Or More | 7. | 27 | 3.0 | 3.2 | 100.0 |
| Unknown | 8. | 59 | 6.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Number Of Rider Violations Last 2 Years, Fatals Only | | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
| Violations | 0. | 15 | 27.8 | 32.6 | 32.6 |
| | 1. | 13 | 24.1 | 28.3 | 60.9 |
| | 2. | 4 | 7.4 | a.7 | 69.6 |
| | 3. | 3 | 5.6 | 6.5 | 76.1 |
| | 4. | 6 | 11.1 | 13.0 | 89.1 |
| | 5. | 2 | 3.7 | 4.3 | 93.5 |
| | 6. | 1 | 1.9 | 2.2 | 95.7 |
| 7 Or More | 7. | 2 | 3.7 | 4.3 | 100.0 |
| Unknown | 8. | 8 | 14.8 | Missing | 100.0 |
| | TOTAL | 54 | 100.0 | 100.0 | |

Table 7.6.2 shows the recent previous accident experience for the motorcycle riders involved in the 900 on-scene, in-depth accident cases. Also included is the accident experience for the 54 fatal cases within the 900 accidents.

Table 7.6.3 (Appendix C.3) is a crosstabulation of motorcycle rider license qualification and traffic violation experience.

Table 7.6.4 (Appendix C.3) shows a crosstabulation of motorcycle rider traffic violation and previous accident experience for the 900 accident cases. A condensation of Table 7.6.4 is as follows.

TABLE 7.6.2. NUMBER OF RIDER ACCIDENTS LAST 2 YEARS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|---------|--------------------|------------------------|------------------------|--------------------------|
| Accidents | 0. | 587 | 65.2 | 69.2 | 69.2 |
| | 1. | 200 | 22.2 | 23.6 | 92.8 |
| | 2. | 41 | 4.6 | 4.8 | 97.6 |
| | 3. | 18 | 2.0 | 2.1 | 99.8 |
| | 4. | 2 | 0.2 | 0.2 | 100.0 |
| Unknown | 8. | 52 | 5.8 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Number Of Rider Accidents Last 2 Years, Fatals Only | | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
| Accidents | 0. | 31 | 57.4 | 67.4 | 67.4 |
| | 1. | 10 | 18.5 | 21.7 | 89.1 |
| | 2. | 2 | 3.7 | 4.3 | 93.5 |
| | 3. | 3 | 5.6 | 6.5 | 100.0 |
| | Unknown | 8. | 8 | 14.8 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 | |

| <u>Accidents</u> | <u>Violations</u> | | |
|------------------|-------------------|--------------|--------------|
| | <u>None</u> | <u>1 - 7</u> | <u>Total</u> |
| None | 267 | 316 | 583 |
| 1 or more | <u>58</u> | <u>198</u> | <u>256</u> |
| TOTAL | 325 | 514 | 839 |

For these accident-involved motorcycle riders, the traffic violation experience is shown to be the more critical association.

Table 7.6.5 (Appendix C.3) shows a crosstabulation of the traffic violation experience and accident precipitating factor for the 900 accident cases. A rearrangement of this tabulation separates the two most frequent accident precipitating factors:

| <u>Traffic Violation Experience</u> | <u>Accident Precipitating Factor</u> | |
|-------------------------------------|--------------------------------------|----------------------------|
| | <u>Motorcycle Rider Error</u> | <u>OV Violation of ROW</u> |
| No previous violations | 137 | 158 |
| 1 or more | 200 | 275 |
| 2 or more | 119 | 157 |
| 3 or more | 63 | 91 |
| TOTAL | (337) | (443) |

In general, these data show that the motorcycle riders with no **moving** violations in the previous two years are more associated with accidents **pre-** cipitated by motorcycle rider **error**.

Table 7.6.6 (Appendix C.3) shows a crosstabulation of accident experience with accident precipitating factor. A rearrangement of this tabulation separates the two most frequent accident precipitating factors.

| Traffic Accident <u>Experience</u> | <u>Accident Precipitating Factor</u> | |
|---------------------------------------|--------------------------------------|----------------------------|
| | <u>Motorcycle Rider Error</u> | <u>OV Violation of ROW</u> |
| No previous accidents | 2 4 6 | 291 |
| 1 or more | 94 | 145 |
| 2 or more | 20 | 36 |
| 3 or more | <u>8</u> | <u>11</u> |
| TOTAL | <u>(340)</u> | <u>(436)</u> |

I" **general**, these data show the tendency of previous accident involvement to be more associated with other vehicle culpability. An implication is either the dominant culpability of the other vehicle driver, or the failure of the accident-involved motorcycle rider to develop a" effective traffic strategy.

7.7 Motorcycle Rider Training Experience

Table 7.7.1 shows the training (not) received by the 900 motorcycle riders in the multidisciplinary study. **Those** riders who had learned from family **and** friends, or who were self-taught, were 92.0% of the total. This represent* a spectacular gap **in** the transfer of vital accident and injury information. Imagine one motorcycle rider learning anything valuable from another rider who has no appreciation of head and eye protection and no understanding of the vital performance of the front brake in collision avoidance. This situation is clearly the weak link in the development of defensive riding strategies and accident prevention.

Table 7.7.1 also shows the **recommendations** of those accident-involved riders to avoid or prevent accidents. Note that there were **no recommendations** in 52.0% of those cases, and it was apparent that those riders were (at that time) still confused about the accident circumstances and had not reconstructed those events for culpability. The very low recommendation for motorcycle safety courses and improved licensing is associated with the lack of perceived and actual culpability for the motorcycle rider. Education of the automobile drivers for **awareness** of motorcycles in traffic **was** suggested by 26.5%. In most cases of this response, punitive action was popular. Punitive action for culpable automobile drivers was a major part of the "other" recommendations, which were 14.2% of the total.

7.8 Motorcycle Rider Dirt Bike Experience

Table 7.8.1 shows that 28.6% of the motorcycle riders claimed significant experience on dirt bikes by recreational trail and desert riding. It is

TABLE 7.7.1. RIDER MOTORCYCLE TRAINING (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|-------|--------------------|------------------------|------------------------|--------------------------|
| Self Taught | 0. | 400 | 44.4 | 49.5 | 49.5 |
| Friends-Family | 1. | 343 | 38.1 | 42.5 | 92.0 |
| Motorcycle Course | 2. | 41 | 4.6 | 5.1 | 97.0 |
| By Professionals | 3. | 20 | 2.2 | 2.5 | 99.5 |
| Other | 4. | 4 | 0.4 | 0.5 | 100.0 |
| Unknown | a. | 92 | 10.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Rider Recommendations To Avoid Accidents (OSIDs) | | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
| None | 0. | 395 | 43.9 | 52.0 | 52.0 |
| Education Of OV | 1. | 201 | 22.3 | 26.5 | 78.5 |
| Motorcycle Licensing | 2. | 15 | 1.7 | 2.0 | 80.5 |
| Motorcycle Safety Course | 3. | 40 | 4.4 | 5.3 | 85.8 |
| Other | 4. | 108 | 12.0 | 14.2 | 100.0 |
| Unknown | a. | 141 | 15.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.8.1. RIDER DIRT BIKE EXPERIENCE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 238 | 26.4 | 28.6 | 28.6 |
| NO | 2. | 595 | 66.1 | 71.4 | 100.0 |
| Unknown | 8. | 67 | 1.4 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

estimated that far less than half of these riders had any competition experience such as enduro, motorcross, scrambles, TT, desert, etc.

A popular proposition is that dirt bike experience prepares the motorcycle rider for hazardous traffic events, especially those relating to road hazards and vehicle problems. Table 7.8.2 shows the crosstabulation of rider dirt bike experience and vehicle involvement. These data show that the riders with dirt bike experience are only slightly underrepresented in the single vehicle collisions. The basic proposition would contend an advantage of high significance in reducing accidents due to loss of control, etc., and this advantage is not shown here.

TABLE 7.8.2 RIDER FIRST BIKE EXPERIENCE BY MULTIPLE/SINGLE VEHICLE (OSIDs)

| Dirt Bike Experience | count Row Pct Col Pct Tot Pct | Single Vehicle | Multi-Vehicle | Unknown | Row Total |
|----------------------|--|----------------|---------------|---------|-----------|
| Yes | | 48 | 176 | 14 | 238 |
| | | 20.2 | 73.9 | 5.9 | 26.4 |
| | | 23.1 | 26.6 | 45.2 | |
| | | 5.3 | 19.6 | 1.6 | |
| NO | | 141 | 439 | 15 | 595 |
| | | 23.7 | 73.8 | -2.5 | 66.1 |
| | | 67.8 | 66.4 | 48.4 | |
| | | 15.7 | 48.8 | 1.7 | |
| Unknown | | 19 | 45 | 2 | 66 |
| | | 28.8 | 60.2 | 3.0 | 7.3 |
| | | 9.1 | 6.8 | 6.5 | |
| | | 2.1 | 5.0 | 0.2 | |
| N/A | | 0 | 1 | 0 | 1 |
| | | 0.0 | 100.0 | 0.0 | 0.1 |
| | | 0.0 | 0.2 | 0.0 | |
| | | 0.0 | 0.1 | 0.0 | |
| | Column Total | 208 | 661 | 31 | 900 |
| | | 23.1 | 73.4 | 3.4 | 100.0 |

Table 7.8.3 shows the motorcycle rider dirt bike experience with the accident precipitating factor for the 900 accident cases. This table shows the motorcycle rider with dirt bike experience is slightly underrepresented in the accident cases involving motorcycle rider error and vehicle failure.

TABLE 7.8.3 RIDER DIRT BIKE EXPERIENCE BY ACCIDENT
PRECIPITATING FACTOR (OSIDs)

| Dirt Bike Experience | Count Row Pct Col Pct Tot Pct | Factor | | | | | | | | | Row Total |
|----------------------|--|-----------------|----------|------------------------|----------------|------------|--------|-----------------|-------|---------|-----------|
| | | Phantom Vehicle | MC Error | JV Violation of MC ROW | Roadway Defect | Pedestrian | Animal | Vehicle Failure | Other | Unknown | |
| Yes | 2 | 83 | 128 | 6 | 3 | 4 | 5 | 6 | 1 | 238 | |
| | 0.8 | 34.9 | 53.8 | 2.5 | 1.3 | 1.7 | 2.1 | 2.5 | 0.4 | 26.4 | |
| | 50.0 | 22.6 | 28.0 | 33.3 | 50.0 | 40.0 | 20.0 | 54.5 | 50.0 | | |
| | 0.2 | 9.2 | 14.2 | 0.7 | 0.3 | 0.4 | 0.6 | 0.7 | 0.1 | | |
| No | 1 | 249 | 300 | 11 | 3 | 6 | 20 | 5 | 0 | 595 | |
| | 0.2 | 41.8 | 50.4 | 1.8 | 0.5 | 1.0 | 3.4 | 0.8 | 0.0 | 66.1 | |
| | 25.0 | 67.8 | 65.6 | 61.1 | 50.0 | 60.0 | 80.0 | 45.5 | 0.0 | | |
| | 0.1 | 27.7 | 33.3 | 1.2 | 0.3 | 0.7 | 2.2 | 0.6 | 0.0 | | |
| Unknown | 1 | 34 | 29 | 1 | 0 | 0 | 0 | 0 | 1 | 66 | |
| | 1.5 | 51.5 | 43.9 | 1.5 | 0.0 | 0.0 | 0.0 | 0.0 | 1.5 | 7.3 | |
| | 25.0 | 9.3 | 6.3 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 | 50.0 | | |
| | 0.1 | 3.8 | 3.2 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | | |
| N/A | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 4 | 367 | 457 | 18 | 6 | 10 | 25 | 11 | 2 | 900 | |
| | 0.4 | 40.8 | 50.8 | 2.0 | 0.7 | 1.1 | 2.8 | 1.2 | 0.2 | 100.0 | |

7.9 Motorcycle Rider Street Bike Experience

Table 7.9.1 shows the days per week that the accident-involved rider rides motorcycles. Note that 56.5% of the riders claimed to ride all seven days per week, implying high utility of the motorcycle and depending upon the motorcycle as a major article of transportation. (Note: "0" was the code used when the accident-involved rider had not ridden previously, or had ridden only infrequently.)

TABLE 7.9. . . DAYS PER WEEK RIDER RIDES MOTORCYCLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Days per Week | 0. | 61 | 6.8 | 7.4 | 7.4 |
| | 1. | 33 | 3.7 | 4.0 | 11.3 |
| | 2. | 45 | 5.0 | 5.4 | 16.8 |
| | 3. | 54 | 6.0 | 6.5 | 23.3 |
| | 4. | 43 | 4.8 | 5.2 | 28.5 |
| | 5. | 86 | 9.6 | 10.4 | 38.8 |
| | 6. | 39 | 4.3 | 4.7 | 43.5 |
| Unknown | 7. | 468 | 52.0 | 56.5 | 100.0 |
| | 8. | 68 | 7.6 | Missing | 100.0 |
| N.A. | 9. | 3 | 0.3 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 7.9.2 (Appendix C.3) shows the months of street motorcycle riding experience claimed by the accident-involved rider. The median experience is approximately three years.

Table 7.9.3 (Appendix C.3) shows the months of experience on the accident-involved motorcycle by the rider. The median experience is approximately months. Note the distinction between the total street motorcycle riding experience and the riding experience on the accident-involved motorcycle. In general, the median experience for total street motorcycle riding experience is almost 3 years, but the median experience on the accident-involved motorcycle is less than 5 months.

Table 7.9.4 has the experience data condensed in increments of experience for comparison.

TABLE 7.9.4 AMOUNT OF **RIDER STREET** MOTORCYCLE RIDING EXPERIENCE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|-------|--------------------|------------------------|------------------------|--------------------------|
| 0-6 Months | 1. | 156 | 17.3 | 19.1 | 19.1 |
| 7-12 Months | 2. | a3 | 9.2 | 10.1 | 29.2 |
| 1-2 Years | 3. | 107 | 11.9 | 13.1 | 42.3 |
| 2-3 Years | 4. | 93 | 10.3 | 11.4 | 53.7 |
| 3-4 Years | 5. | 64 | 7.1 | 7.8 | 61.5 |
| More Than 4 Years | 6. | 315 | 35.0 | 38.5 | 100.0 |
| unknown | 8. | a2 | 9.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Experience On Accident-Involved Motorcycle (OSIDs) | | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
| 0-6 Months | 1. | 491 | 54.6 | 57.4 | 57.4 |
| 7-12 Months | 2. | 136 | 15.1 | 15.9 | 73.3 |
| 1-2 Years | 3. | 112 | 12.4 | 13.1 | 86.4 |
| 2-3 Years | 4. | 63 | 7.0 | 7.4 | 93.8 |
| 3-4 Years | 5. | 26 | 2.9 | 3.0 | 96.8 |
| More Than 4 Years | 6. | 27 | 3.0 | 3.2 | 100.0 |
| Unknown | a. | 45 | 5.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Of course, there are special problems in obtaining accurate estimates of rider experience by personal interview. It would be an incredible situation for the accident-involved motorcycle rider to respond to the interview with "no, I don't know **nuthin'** about bikes; I've never ridden a motorcycle before in my whole life!" The **more** likely situation is that the **rider tries** to "shuck and jive" the interviewer with great reconstructions of dirt bike experience, racing experience, and the old Honda, BSA, or Harley he used to own. It **was** critical that the Interviewer have his own considerable motorcycle experience to qualify the Interview information. For these reasons, the experience in the accident-involved motorcycle **is** the **more** realistic measure of street motorcycle riding experience.

These data portray the accident-involved rider as **not** lacking in experience. Those motorcycle riders with 0 to 6 months street riding experience are **only** 19.1% of this accident population. Note that far more than one-third (38.5%) of the accident-involved motorcycle riders had more than 4 years experience. These riders **have** experience, but not on the accident-involved motorcycle.

A special contradiction shown here is that these motorcycle riders have experience, but no training.

7.10 Motorcycle Rider Familiarity with Roadway

Table 7.10.1 shows the number of times that the accident-involved motorcycle rider traversed that roadway at the accident site. The data are shown for the 900 on-scene, in-depth accident cases, and the 54 fatal accidents of that group.

While most cases show that the rider **was** familiar with the roadway, it is surprising that 10.3% of the accident cases Involved a roadway which the rider had never traveled before.

7.11 Motorcycle Rider Hand Preference

The detailed interviews with the accident-involved motorcycle riders revealed that 10.8% were left-handed. This factor implies limitations of front es well as rear brake use during the emergency conditions of collision avoidance. Table 7.11.1 also shows that 3.8% of those accident involved motorcycle riders claimed to be ambidextrous.

7.12 Motorcycle Rider Alcohol and Drug Involvement

Table 7.12.1 shows the rider alcohol and drug involvement for the 900 on-scene, in-depth accident cases. A total of 11.5% of the accident-involved riders had some sort of involvement end some degree of impairment. Table 7.12.2 shows that alcohol and drug involvement for the 54 fatal accidents in the 900 cases. Of those fatal accidents, 40.9% involved rider impairment.

Tables 7.12.3 and 7.12.4 show the **rider blood** alcohol level at the time of the accident for the 900 on-scene, in-depth cases and the 54 fatal cases.

TABLE 7.10.1. RIDER FAMILIARITY WITH ROADWAY NUMBER OF TIMES
RIDERS TRAVERSED ROADWAY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-----------|--------------------|------------------------|------------------------|
| 900 OSIDs | | | | |
| Never Before | 0. | 85 | 9.4 | 10.3 |
| Daily | 1. | 386 | 42.9 | 46.8 |
| 1-4 Times Weekly | 2. | 205 | 22.8 | 24.9 |
| 1-3 Times Monthly | 3. | 73 | 8.1 | 8.9 |
| 1-2 Times Quarterly | 4. | 20 | 2.2 | 2.4 |
| 1-3 Times Annually | 5. | 33 | 3.7 | 4.0 |
| Less than Annually | 6. | 22 | 2.4 | 2.7 |
| Unknown | a. | 76 | 6.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| OSID Fatal Only | | | | |
| Never Before | 0. | 1 | 1.9 | 2.5 |
| Daily | 1. | 20 | 37.0 | 50.0 |
| 1-4 Times Weekly | 2. | 8 | 14.8 | 20.0 |
| 1-3 Times Monthly | 3. | 3 | 5.6 | 7.5 |
| 1-2 Times Quarterly | 4. | 3 | 5.6 | 7.5 |
| 1-3 Times Annually | 5. | 3 | 5.6 | 7.5 |
| Less than Annually | 6. | 2 | 3.7 | 5.0 |
| Unknown | 8. | 14 | 25.9 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 |

TABLE 7.11.1. RIDER HAND PREFERENCE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Right | 1. | 712 | 79.1 | 85.4 |
| Left | 2. | 90 | 10.0 | 10.8 |
| Ambidextrous | 3. | 32 | 3.6 | 3.8 |
| Unknown | 8. | 66 | 7.3 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 |

TABLE 7.12.1. RIDER ALCOHOL OR DRUG INVOLVEMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| HBD, Not Under Influence | 1. | 35 | 3.9 | 4.0 | 4.0 |
| HBD, Under Influence | 2. | 37 | 4.1 | 4.2 | 8.2 |
| HBD, Impairment Unknown | 3. | 23 | 2.6 | 2.6 | 10.8 |
| Drug Influence | 4. | 3 | 0.3 | 0.3 | 11.1 |
| Combination | 5. | 5 | 0.6 | 0.6 | 11.7 |
| Unknown | 8. | 24 | 2.7 | Missing | Missing |
| N.A. | 9. | 773 | 85.9 | 88.2 | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.12.2. RIDER ALCOHOL OR DRUG INVOLVEMENT, FATAL ACCIDENTS ONLY (OSID FATALS ONLY)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| HBD, Not Under Influence | 1. | 7 | 13.0 | 13.7 | 13.7 |
| HBD, Under Influence | 2. | 12 | 22.2 | 23.5 | 37.2 |
| HBD, Impairment Unknown | 3. | 1 | 1.9 | 2.0 | 39.2 |
| Drug Influence | 4. | 1 | 1.9 | 2.0 | 41.2 |
| Combination | 5. | 1 | 1.9 | 2.0 | 43.1 |
| Unknown | 8. | 3 | 5.6 | Missing | Missing |
| N.A. | 9. | 29 | 53.7 | 56.9 | 100.0 |
| | TOTAL | 54 | 100.0 | 100.0 | |

TABLE 7.12.3. RIDER BLOOD ALCOHOL LEVEL AT TIME OF ACCIDENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | |
|------------------------|-----------------------------------|--------------------|------------------------|------------------------|-----|
| Blood Alcohol Level, % | .00 | 776 | 86.2 | 94.6 | |
| | .01 | 1 | 0.1 | 0.1 | |
| | .02 | 1 | 0.1 | 0.1 | |
| | .03 | 3 | 0.3 | 0.4 | |
| | .04 | 1 | 0.1 | 0.1 | |
| | .05 | 2 | 0.2 | 0.2 | |
| | .06 | 1 | 0.1 | 0.1 | |
| | .07 | 2 | 0.2 | 0.2 | |
| | .08 | 3 | 0.3 | 0.4 | |
| | .09 | 1 | 0.1 | 0.1 | |
| | .10 | 4 | 0.4 | 0.5 | |
| | .11 | 2 | 0.2 | 0.2 | |
| | Median of Alcohol Involved Riders | .12 | 1 | 0.1 | 0.1 |
| | | .13 | 1 | 0.1 | 0.1 |
| | | .14 | 3 | 0.3 | 0.4 |
| | | .15 | 2 | 0.2 | 0.2 |
| | | .16 | 1 | 0.1 | 0.1 |
| | | .17 | 1 | 0.1 | 0.1 |
| | | .18 | 3 | 0.3 | 0.4 |
| | | .19 | 1 | 0.1 | 0.1 |
| | | .20 | 1 | 0.1 | 0.1 |
| .21 | | 4 | 0.4 | 0.5 | |
| Unknown | .22 | 2 | 0.2 | 0.2 | |
| | .28 | 1 | 0.1 | 0.1 | |
| | .30 | 1 | 0.1 | 0.1 | |
| | .31 | 1 | 0.1 | 0.1 | |
| | .98 | 80 | 8.9 | Missing | |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.12.4. RIDER BLOOD ALCOHOL LEVEL AT TIME OF ACCIDENT
(OSID FATALS ONLY)

| Category | Label | Absolute Code | Relative Frequency | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------------------|-------|---------------|--------------------|------------------------|--------------------------|
| Blood Alcohol, % | .00 | 29 | 53.7 | 59.2 | 59.2 |
| | .02 | 1 | 1.9 | 2.0 | 61.2 |
| | .03 | 2 | 3.7 | 4.1 | 65.3 |
| | .05 | 1 | 1.9 | 2.0 | 67.3 |
| | .07 | 1 | 1.9 | 2.0 | 69.4 |
| | .08 | 1 | 1.9 | 2.0 | 71.4 |
| | .09 | 1 | 1.9 | 2.0 | 73.5 |
| | .11 | 2 | 3.7 | 4.1 | 77.6 |
| | .12 | 1 | 1.9 | 2.0 | 79.6 |
| | .13 | 1 | 1.9 | 2.0 | 81.6 |
| | .14 | 1 | 1.9 | 2.0 | 83.7 |
| | .15 | 1 | 1.9 | 2.0 | 85.7 |
| | .19 | 1 | 1.9 | 2.0 | 87.8 |
| | .21 | 3 | 5.6 | 6.1 | 93.9 |
| | .22 | 1 | 1.9 | 2.0 | 95.9 |
| Median Of Alcohol Involved Riders | .30 | 1 | 1.9 | 2.0 | 98.0 |
| | .31 | 1 | 1.9 | 2.0 | 100.0 |
| | .98 | 5 | 9.3 | Missing | 100.0 |
| Unknown | | | | | |
| | TOTAL | 54 | 100.0 | 100.0 | |

The median value for the 900 cases is 0.1252, and the distribution of the 54 fatalities has the same median value. In the fatal accident cases, the blood alcohol level was obtained from toxicological analysis; in the non-fatal cases, the blood alcohol level was taken from law enforcement test records when breath, blood or urine tests were made. When no such test record was available, calculations were performed based on drinks consumed, body weight, and elapsed time in order to have a suitable estimate.

Tables 7.12.5 and 7.12.6 shows the rider use of drugs other than alcohol and identifies the type of drug involved. The most frequent depressant involved was Quaalude.

Table 7.12.7 shows the rider alcohol involvement for the 3600 traffic accident reports analyzed. The circumstances of the accidents and the criteria for notation of alcohol involvement on the police traffic accident report relate an actual involvement higher than shown in this table. In comparing the same accident results, it was obvious that alcohol involvement was noted on the police traffic accident report only when the impairment was severe and sufficient for prosecution.

TABLE 7.12.5. RIDER USE OF DRUGS OTHER THAN ALCOHOL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--|-------|--------------------|------------------------|------------------------|
| None | 0. | 811 | 90.1 | 95.9 |
| Prescription | 1. | 18 | 2.0 | 2.1 |
| Non-Prescription | 2. | 17 | 1.9 | 2.0 |
| Unknown | 8. | 54 | 6.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Rider Use of Drugs--Type of Drug (OSIDs) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| None | 0. | 810 | 90.0 | 96.2 |
| Marijuana | 1. | 9 | 1.0 | 1.1 |
| Stimulants | 2. | 2 | 0.2 | 0.2 |
| Depressants | 3. | 15 | 1.7 | 1.8 |
| Depressant Antihistamine | 5. | 3 | 0.3 | 0.4 |
| Stimulant Antihistamine | 6. | 1 | 0.1 | 0.1 |
| Multiple | 7. | 2 | 0.2 | 0.2 |
| Unknown | 8. | 58 | 6.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 7.12.6. RIDER USE OF DRUGS OTHER THAN ALCOHOL (OSID FATALS ONLY)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-------|--------------------|------------------------|------------------------|
| <u>Prescription/Non-prescription status</u> | | | | |
| None, | 0. | 47 | 87.0 | 94.0 |
| Prescription | 1. | 2 | 3.7 | 4.0 |
| Non-Prescription | 2. | 1 | 1.9 | 2.0 |
| Unknown | 8. | 4 | 7.4 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 |
| <u>Type of Drug</u> | | | | |
| None | 0. | 47 | 87.0 | 94.0 |
| Depressants | 3. | 2 | 3.7 | 4.0 |
| Multiple | 7. | 1 | 1.9 | 2.0 |
| Unknown | 8. | 4 | 7.4 | Missing |
| | TOTAL | 54 | 100.0 | 100.0 |

TABLE 7.12.7. RIDER ALCOHOL AND DRUG INVOLVEMENT (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Had Not Been Drinking | 1. | 3221 | 89.5 | 94.2 | 94.2 |
| HBD-Influence Unk. | 2. | 187 | 5.2 | 5.5 | 99.6 |
| Under Drug Influence | 3. | 12 | 0.3 | 0.4 | 100.0 |
| Unknown/Not Reported | 8. | 180 | 5.0 | Missing | 100.0 |
| | TOTAL | 3600 | 100.0 | 100.0 | |

7.13 Motorcycle Rider Physiological Impairment

Table 7.13.1 shows the permanent physiological impairment of the accident-involved motorcycle riders. The specific items which deserve explanation are as follows:

- Code 3. Brain (2) - Epileptics
- Code 5. Vision (3) - Blind or missing one eye
- Code 8. Loss of Limbs (1) - Lower left leg prosthesis as a result of an industrial accident
- Code 9. Other (3) - Deaf (1) and Deaf Mute (2)

TABLE 7.13.1. RIDER PERMANENT PHYSIOLOGICAL IMPAIRMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|--------------|--------------------|------------------------|------------------------|
| None | 0. | 886 | 98.4 | 98.4 |
| Diabetes | 2. | 2 | 0.2 | 0.2 |
| Brain | 3. | 2 | 0.2 | 0.2 |
| Cardlo-Vascular | 4. | 3 | 0.3 | 0.3 |
| Vision | 5. | 3 | 0.3 | 0.3 |
| Loss Of Limbs | 8. | 1 | 0.1 | 0.1 |
| Other | 9. | 3 | 0.3 | 0.3 |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.13.2 shows the temporary physiological impairment for the accident-involved motorcycle riders. Fatigue and hunger predominated and required further investigation. Table 7.13.3 (Appendix C.3) provides a crosstabulation of this rider temporary physiological impairment with time riding before the accident. The two rider impairment conditions of fatigue and hunger are not

TABLE 7.13.2. RIDER TEMPORARY PHYSIOLOGICAL IMPAIRMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|--------------|--------------------|------------------------|------------------------|
| None | a. | 826 | 91.8 | 91.8 |
| Fatigue | 1. | 20 | 2.2 | 2.2 |
| Hunger | 2. | 20 | 2.2 | 2.2 |
| Thirst | 3. | 2 | 0.2 | 0.2 |
| Siesta Syndrome | 4. | 1 | 0.1 | 0.1 |
| Elimination urgency | 5. | 3 | 0.3 | 0.3 |
| Minor Malaise | 6. | 3 | 0.3 | 0.3 |
| Other or Unknown | 8. | 25 | 2.8 | 2.8 |
| | TOTAL | 900 | 100.0 | 100.0 |

related to the effects of the motorcycle riding tasks, helmet use, etc. Ninety percent of those two conditions are noted to occur within 0.5 hours of riding time and are clearly pre-existing conditions.

7.14 Motorcycle Rider Characteristics, Tattoos

The **tattoo** is the traditional mark of the person with risk-taking tendencies, and the number of tattoos was recorded as human factors data for each of the accident cases.

Table 7.14.1 shows the **tattoos** for all accidents (900) and the fatal accidents of that group (54).

Table 7.14.2 shows the **tattoos** for the accompanying passengers who were involved in the accidents.

7.15 Motorcycle Rider Performance, Rider Attention to Driving Task

Table 7.15.1 relates the rider attention to the driving task in the pre-crash events. Adjacent traffic, non-traffic items, and motorcycle operation held the attention of riders in 21.8% of the 900 on-scene, in-depth accident cases. The motorcycle rider was in the inattentive mode in 19.1% of the cases. This total of 40.9% of the cases depicts a significant contribution of distraction and inattention in the pre-crash events. Motorcycle safety training can focus on this problem by developing skills and traffic strategy to concentrate attention to the tasks of traffic.

Also, Section 6.11 portrays the greatest part of the accident hazards in the **line-of-sight** of 11, 12 and 1 o'clock. In other words, the requirements for rider attention to the driving task are completely conventional in orientation. There are no special attention requirements in the lateral spaces.

TABLE 7.14.1. MOTORCYCLE RIDER BODY TATTOOS (900 OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|-----------|--------------------|------------------------|------------------------|
| Tattoos | 0. | 631 | 70.1 | 80.0 |
| | 1. | 75 | 8.3 | 9.5 |
| | 2. | 43 | 4.8 | 5.4 |
| | 3. | 15 | 1.7 | 1.9 |
| | 4. | 8 | 0.9 | 1.0 |
| | 5. | 2 | 0.2 | 0.3 |
| | 6. | 4 | 0.4 | 0.5 |
| | 7 Or More | 7. | 11 | 1.2 |
| Unknown | 8. | 111 | 12.3 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| (54 Fatal Only) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| Tattoos | 0. | 38 | 70.4' | 71.7 |
| | 1. | 6 | 11.1 | 11.3 |
| | 2. | 3 | 5.6 | 5.7 |
| | 3. | 2 | 3.7 | 3.8 |
| | 4. | 1 | 1.9 | 1.9 |
| | 5. | 1 | 1.9 | 1.9 |
| | 6. | 1 | 1.9 | 1.9 |
| | 7 Or More | 7. | 1 | 1.9 |
| Unknown | 8. | 1 | 1.9 | Missing |
| TOTAL | | 54 | 100.0 | 100.0 |

TABLE 7.14.2. BODY TATTOOS-PASSENGER (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|------|--------------------|------------------------|------------------------|
| Tattoos | 0. | 87 | 9.7 | 88.8 |
| | 1. | 4 | 0.4 | 4.1 |
| | 2. | 3 | 0.3 | 3.1 |
| | 3. | 1 | 0.1 | 1.0 |
| | 4. | 1 | 0.1 | 1.0 |
| | 6. | 1 | 0.1 | 1.0 |
| 7 Or More | 7. | 1 | 0.1 | 1.0 |
| Unknown | 8. | 54 | 6.0 | Missing |
| N.A. | 9. | 748 | 83.1 | Missing |
| TOTAL | | 900 | 100.0 | |

TABLE 7.15.1. RIDER ATTENTION TO DRIVING TASK (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---|-------|--------------------|------------------------|------------------------|--------------------------|
| Attention diverted to surrounding traffic | 1. | 106 | 11.8 | 12.6 | 12.6 |
| Attention diverted to non-traffic item | 2. | 43 | 4.8 | 5.1 | 17.7 |
| Attention diverted to motorcycle operation | 3. | 35 | 3.9 | 4.2 | 21.8 |
| Inattentive Mode | 4. | 161 | 17.9 | 19.1 | 40.9 |
| Unknown | 8. | 57 | 6.3 | Missing | Missing |
| N.A. Attention to driving task not a factor | 9. | 498 | 55.3 | 59.1 | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

7.16 Motorcycle Rider Performance, Rider Stress on Day of Accident

Table 7.16.1 shows the type of stress which was detectable by the research personnel during the 900 on-scene, in-depth investigations. The outstanding factor contributing to rider stress which was observed was due to conflict with relatives and close friends, who were members of the immediate household. The second most significant factor was that stress related to some special beneficial event which generated pressure affecting events of the day, e.g., promotion, new motorcycle, etc. These stresses were in fact related to those motorcycle riders being inattentive during the precrash time.

TABLE 7.16.1. RIDER STRESS-DAY OF ACCIDENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 781 | 86.8 | 86.8 |
| Relatives Conflict | 1. | 38 | 4.2 | 4.2 |
| Work Conflict | 2. | 4 | 0.4 | 0.4 |
| Death, Illness | 3. | 3 | 3.3 | 0.3 |
| Financial | 4. | 9 | 1.0 | 1.0 |
| School, Work | 5. | 17 | 1.9 | 1.9 |
| Legal, Police | 6. | 14 | 1.6 | 1.6 |
| Social Agency | 7. | 1 | 0.1 | 0.1 |
| Reward | 8. | 33 | 3.7 | 3.7 |
| | TOTAL | 900 | 100.0 | 100.0 |

7.17 Motorcycle Rider Collision Avoidance Performance

Of course, the collision avoidance performance of an accident-involved **motorcycle** rider is expected to show problems and failures. Each one of the 900 on-scene, in-depth accident cases "as completely reconstructed to provide all details of the precrash events. The motorcycle rider's precrash actions were determined and evaluated to determine the collision avoidance performance.

One of the most critical factors in reconstructing the sequence of **pre-**crash events is the chronology of those events. The speeds, accelerations, distances and directions were determined in each case and the time available for collision avoidance "as determined. The time available **to the** motorcycle rider for collision avoidance begins with the initiation of the precipitating event and terminates with the crash impact. For example, an automobile in traffic approaching the motorcycle path begins a left turn in front of the oncoming motorcycle, the rider later detects that motion, decides on rear braking, applies the rear brake and skids into the left-turning automobile. That total time from the automobile beginning the left turn until crash impact is derived for each of the 900 on-scene, in-depth investigations.

Table 7.17.1 shows that **time** available for collision avoidance for all 900 cases. The median value is less than 1.9 seconds. It is typical that the motorcycle rider must detect, decide **and** react to a traffic hazard in less than two seconds. Any significant delay in the hazard detection, decision and control action will preclude success of the collision avoidance.

Consider that typical case specified where the automobile turns left in front of the oncoming motorcycle. If the motorcycle initial speed is 35 mph, an attainable braking distance is 50' if both front and rear brakes are used well. If the rider requires 1 second total reaction time for detection, decision and neuromuscular and vehicle reaction, then a total of 3 seconds and 100' are required for a safe stop. The fundamental problem is a serious lack of time for success in collision avoidance; two seconds are available but three seconds are required. The proper evasive **action** must be taken and executed well without **any** delay.

But the accident-involved motorcycle riders made errors of the collision avoidance action and execution. Table 7.17.2 shows the evasive action taken by the rider and evaluates the execution and choice of action. Within the data **shown** are several basic problems. Emergency braking skills are required for success in collision avoidance maneuvers, however both brakes were used in only 17.0% of the accidents (and many times not used well). The most common action "as to use the rear brake only (18.5%) or the rear brake and swerve (11.7%). This failure to use the front brake is a critical element in collision avoidance because proper use of the front brake would have avoided many of the collisions or greatly reduced the severity.

The execution of the evasive action was correct in 15.6% of the accident cases, **or** 23.8% of the *time* some evasive action "es attempted. A typical problem would be as follows: An oncoming automobile turns left in front of the motorcycle; the rider locks up the rear wheel by overbraking, slides out and falls to the roadway, and slides into the automobile. Another example would be as follows: with a violation of his right-of-way, the motorcycle rider

TABLE 7.17.1. **TIME** FROM PRECIPITATING EVENT TO IMPACT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cummulative Frequency (%) |
|----------------|------------|--------------------|------------------------|------------------------|---------------------------|
| Time, seconds | 0.0 | 1 | 0.1 | 0.1 | 0.1 |
| | 0.1 | 1 | 0.1 | 0.1 | 0.2 |
| | 0.2 | 1 | 0.1 | 0.1 | 0.4 |
| | 0.4 | 4 | 0.4 | 0.5 | 0.9 |
| | 0.5 | 4 | 0.4 | 0.5 | 1.3 |
| | 0.6 | 1 | 0.1 | 0.1 | 1.5 |
| | 0.7 | 12 | 1.3 | 1.5 | 2.9 |
| | 0.8 | 7 | 0.8 | 0.9 | 3.8 |
| | 0.9 | 2 | 0.1 | 0.1 | 3.9 |
| | 1.0 | | 2.4 | 2.7 | 6.6 |
| | 1.1 | 5 | 0.6 | 0.6 | 7.2 |
| | 1.2 | 31 | 3.4 | 3.5 | 11.0 |
| | 1.3 | 36 | 4.0 | 4.4 | 15.4 |
| | 1.4 | 44 | 4.9 | 5.4 | 20.8 |
| | 1.5 | 53 | 5.9 | 6.5 | 27.3 |
| | 1.6 | 62 | 6.9 | 7.6 | 34.9 |
| | 1.7 | 41 | 4.6 | 5.0 | 39.9 |
| | 1.8 | 67 | 7.4 | 8.2 | 48.1 |
| | 1.9 | 29 | 3.2 | 3.5 | 51.7 |
| | 2.0 | 79 | 8.8 | 9.7 | 61.3 |
| | 2.1 | 53 | 3.4 | 3.8 | 65.1 |
| | 2.2 | 27 | 5.9 | 6.5 | 71.6 |
| | 2.3 | | 3.0 | 3.3 | 74.9 |
| | 2.4 | 23 | 2.6 | 2.8 | 77.7 |
| | 2.5 | 42 | 4.7 | 5.1 | 82.9 |
| | 2.6 | 18 | 2.0 | 2.2 | 85.1 |
| | 2.7 | 12 | 1.3 | 1.5 | 86.5 |
| | 2.8 | 20 | 2.2 | 2.4 | 89.0 |
| | 2.9 | 7 | 0.8 | 0.9 | 89.8 |
| | 3.0 | 27 | 3.0 | 3.3 | 93.1 |
| | 3.1 | 10 | 1.1 | 1.2 | 94.4 |
| | 3.2 | 14 | 1.6 | 1.7 | 96.1 |
| | 3.3 | 1 | 0.1 | 0.1 | 96.2 |
| | 3.4 | 4 | 0.4 | 0.5 | 96.7 |
| | 3.5 | 8 | 0.9 | 1.0 | 97.7 |
| | 3.6 | 1 | 0.1 | 0.1 | 97.8 |
| 3.7 | 3 | 0.3 | 0.4 | 98.2 | |
| 3.8 | 5 | 0.6 | 0.6 | 98.8 | |
| 4.0 | 3 | 0.3 | 0.1 | 99.1 | |
| 4.1 | 1 | 0.1 | 0.1 | 99.3 | |
| 4.4 | 1 | 0.1 | | 99.4 | |
| 4.9 | 1 | 0.1 | 0.1 | 99.5 | |
| 5.1 | 1 | 0.1 | 0.1 | 99.6 | |
| 5.2 | 1 | 0.1 | 0.1 | 99.8 | |
| 6.0 | 2 | 0.2 | 0.2 | 100.0 | |
| Unknown | 9.8 | 77 | 8.6 | Missing | 100.0 |
| N.A. | 9.9 | 6 | 0.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.17.2. MOTORCYCLE EVASIVE ACTION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-----------|--------------------|------------------------|------------------------|
| <u>Evasive Action Taken</u> | | | | |
| None | 0. | 283 | 31.4 | 31.9 |
| Rear Brake Only | 1. | 164 | 1a.2 | 18.5 |
| Front Brake Only | 2. | 7 | 0.8 | 0.8 |
| Both Brakes | 3. | 151 | 16.8 | 17.0 |
| swerve Only | 4. | 74 | a.2 | a.4 |
| Lay Down & Slide | 5. | 8 | 0.9 | 0.9 |
| Accelerate | 6. | 8 | 0.9 | 0.9 |
| Rear Brake & Swerve | 7. | 104 | 11.6 | 11.7 |
| Front Brake & Swerve | 8. | 4 | 0.4 | 0.5 |
| Both Brakes & Swerve | 9. | 77 | 8.6 | a.7 |
| Accelerate & Swerve | 10. | 1 | 0.1 | 0.1 |
| Other | 12. | 5 | 0.6 | 0.6 |
| Unknown | 98. | 14 | 1.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Evasive Action Properly Executed?</u> | | | | |
| Yes | 1. | 140 | 15.6 | 23.8 |
| No | 2. | 449 | 49.9 | 76.2 |
| Unknown | a. | 14 | 1.6 | Missing |
| N.A. | 9. | 297 | 33.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Evasive Action Proper for Situation?</u> | | | | |
| Yes | 1. | 263 | 29.2 | 43.7 |
| Probable | 2. | 7 | 0.8 | 1.2 |
| Undecided | 3. | 1 | 0.1 | 0.2 |
| Improbable | 4. | 4 | 0.4 | 0.7 |
| NO | 5. | 327 | 36.3 | 54.3 |
| Unknown | a. | 9 | 1.0 | Missing |
| N.A. | 9. | 289 | 32.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

applies both brakes, **overbrakes** at the front. locks up the front wheel, slides out and falls to the roadway. Skidding from **overbraking** was the most common execution problem, and usually resulted in a loss of control of the motorcycle. **Many** accident-involved riders would describe their pre-crash action as "laying the bike down" to avoid the crash, when in reality the accident evidence pointed **to a** simple case of overbraking at the rear wheel, slide out and fall with a complete loss of control by the rider. A controlled "lay down and slide" **was** verified in only **8** accident cases and in fact was the wrong choice of evasive action in 6 of those 8 cases.

In the pre-crash actions shown in Table 7.17.2. it is seen that the accident-involved rider demonstrates poor choice of evasive action and executes that choice poorly. **Overbraking** at the rear wheel and underbraking at the front wheel is a common combination of errors. But foremost in these data is the fact that 31.9% of the riders did NOTHING in the way of evasive action in the **precrash** time.

Table 7.17.3 provides a crosstabulation of collision avoidance action and the evaluation of that choice of action. Note that the use of the rear brake only was a very poor choice, **as** were most of the decisions **made** by the **accident-**involved riders.

Table 7.17.4 evaluates the execution of the chosen collision avoidance action. Most of the execution failures in braking involved skidding, particularly for the rear wheel since it was utilized the most often. The attempts to swerve were very badly executed. with most failures illustrating no concise collision avoidance capability of the accident-involved rider. The ability to intentionally counter-steer and generate the sudden swerve was generally **unknown** by these riders.

These data are not intended to substantiate any need for high speed, high performance rider training as a countermeasure in accident prevention. However, they show that these accident-involved riders did not demonstrate some **basic** motorcycle riding skills in that instant when a hazard **was** presented.

For comparison, the motorcycle rider **was** asked about his own braking habits, and in particular, the frequency of front brake use. Table 7.17.5 shows the accident-involved rider's utilization of the front brake, which is far greater than that shown in the analysis of the accident events. Those riders state that they "usually" or "always" use the front brake a total of 73.5% of the time. This would indicate relatively high use of the front brake and an expectation of the motorcycle to have acceptable stopping performance. The data shown previously in Tables 7.17.2, 7.17.3, and 7.17.4 regarding front brake use did not rely upon rider opinion **or** statement. Suspension **displacements**, control positions, skid patches, **skidmarks**, tire circumferential striations, etc., were analyzed by the research team to distinguish the actual function of the front brake to provide these data.

Regardless of the circumstances, the accident-involved rider is most likely to reconstruct the accident events without qualification or objectivity and respond affirmatively. Such opinions regarding brake use must not be considered factual.

TABLE 7.17.3. MOTORCYCLE EVASIVE ACTION TYPE BY PROPRIETY OF EVASIVE ACTION (OSIDs)

| Evasive Action | Count Row Pct Col Pct Tot Pct | Proper Evasive Action? | | | | | | Row Total | |
|----------------|--|------------------------|----------|-----------|------------|------|--------|-----------|-------|
| | | Yes | Probable | Undecided | Improbable | No | nknown | | N/A |
| None | 4 | 0 | 0 | 0 | 0 | 3 | 0 | 276 | 283 |
| | 1.4 | 0.0 | 0.0 | 0.0 | 0.0 | 1.1 | 0.0 | 97.5 | 31.4 |
| | 1.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.9 | 0.0 | 95.5 | |
| | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | 30.7 | |
| Rear Brake | 15 | 2 | 1 | 1 | 142 | 0 | 3 | 164 | 164 |
| | 9.1 | 1.2 | 0.6 | 0.6 | 86.6 | 0.0 | 1.8 | 18.2 | 18.2 |
| | 5.7 | 28.6 | 100.0 | 25.0 | 43.4 | 0.0 | 1.0 | | |
| | 1.7 | 0.2 | 0.1 | 0.1 | 15.8 | 0.0 | 0.3 | | |
| Front Brake | 2 | 1 | 0 | 0 | 3 | 0 | 1 | 7 | 7 |
| | 28.6 | 14.3 | 0.0 | 0.0 | 42.9 | 0.0 | 14.3 | 0.8 | 0.8 |
| | 0.8 | 14.3 | 0.0 | 0.0 | 0.9 | 0.0 | 0.3 | | |
| | 0.2 | 0.1 | 0.0 | 0.0 | 0.3 | 0.0 | 0.1 | | |
| Both Brakes | 125 | 2 | 0 | 1 | 21 | 0 | 2 | 151 | 151 |
| | 82.8 | 1.3 | 0.0 | 0.7 | 13.9 | 0.0 | 1.3 | 16.8 | 16.8 |
| | 47.5 | 28.6 | 0.0 | 25.0 | 6.4 | 0.0 | 0.7 | | |
| | 13.9 | 0.2 | 0.0 | 0.1 | 2.3 | 0.0 | 0.2 | | |
| Swerve | 23 | 2 | 0 | 1 | 47 | 0 | 1 | 74 | 74 |
| | 31.1 | 2.7 | 0.0 | 1.4 | 63.5 | 0.0 | 1.4 | 8.2 | 8.2 |
| | 8.7 | 28.6 | 0.0 | 25.0 | 14.4 | 0.0 | 0.3 | | |
| | 2.6 | 0.2 | 0.0 | 0.1 | 5.2 | 0.0 | 0.1 | | |
| Lay Down-Slide | 2 | 0 | 0 | 0 | 6 | 0 | 0 | 8 | 8 |
| | 25.0 | 0.0 | 0.0 | 0.0 | 75.0 | 0.0 | 0.0 | 0.9 | 0.9 |
| | 0.8 | 0.0 | 0.0 | 0.0 | 1.8 | 0.0 | 0.0 | | |
| | 0.2 | 0.0 | 0.0 | 0.0 | 0.7 | 0.0 | 0.0 | | |
| Accelerate | 5 | 0 | 0 | 0 | 3 | 0 | 0 | 8 | 8 |
| | 62.5 | 0.0 | 0.0 | 0.0 | 37.5 | 0.0 | 0.0 | 0.9 | 0.9 |
| | 1.9 | 0.0 | 0.0 | 0.0 | 0.9 | 0.0 | 0.0 | | |
| | 0.6 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | 0.0 | | |
| 1 and 4 | 12 | 0 | 0 | 0 | 92 | 0 | 0 | 104 | 104 |
| | 11.5 | 0.0 | 0.0 | 0.0 | 88.5 | 0.0 | 0.0 | | |
| | 4.6 | 0.0 | 0.0 | 0.0 | 28.1 | 0.0 | 0.0 | | |
| | 1.3 | 0.0 | 0.0 | 0.0 | 10.2 | 0.0 | 0.0 | | |
| 2 and 4 | 0 | 0 | 0 | 0 | 4 | 0 | 0 | 4 | 4 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.4 | 0.4 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 1.2 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.4 | 0.0 | 0.0 | | |
| 3 and 4 | 71 | 0 | 0 | 0 | 4 | 0 | 0 | 77 | 77 |
| | 92.2 | 0.0 | 0.0 | 0.0 | 5.2 | 0.0 | 2.6 | 8.6 | 8.6 |
| | 27.0 | 0.0 | 0.0 | 0.0 | 1.2 | 0.0 | 0.7 | | |
| | 7.9 | 0.0 | 0.0 | 0.0 | 0.4 | 0.0 | 0.2 | | |
| 4 and 6 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 1 | 1 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.1 | 0.1 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | | |
| Unknown | 3 | 0 | 0 | 1 | 1 | 0 | 0 | 5 | 5 |
| | 60.0 | 0.0 | 0.0 | 20.0 | 20.0 | 0.0 | 0.0 | 0.6 | 0.6 |
| | 1.1 | 0.0 | 0.0 | 25.0 | 0.3 | 0.0 | 0.0 | | |
| | 0.3 | 0.0 | 0.0 | 0.1 | 0.1 | 0.0 | 0.0 | | |
| Unknown | 1 | 0 | 0 | 0 | 0 | 9 | 4 | 14 | 14 |
| | 7.1 | 0.0 | 0.0 | 0.0 | 0.0 | 64.3 | 28.6 | 1.6 | 1.6 |
| | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 00.0 | 1.4 | | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 1.0 | 0.4 | | |
| Column Total | 263 | 7 | 1 | 4 | 327 | 9 | 289 | 900 | 900 |
| Row Total | 29.2 | 0.8 | 0.1 | 0.4 | 36.3 | 1.0 | 32.0 | 100.0 | 100.0 |

TABLE 7.17.4. MOTORCYCLE EVASIVE ACTION TYPE BY PROPER EXECUTION OF EVASIVE ACTION (OSIDs)

| Evasive Action | Count Row Pct Col Pct Tot Pct | Properly executed? | | | | Row Total |
|----------------|--|--------------------|------|---------|-------|-----------|
| | | Yes | No | Unknown | N/A | |
| None | 4 | 1 | 0 | 278 | 283 | |
| | 1.4 | 0.4 | 0.0 | 98.2 | 31.4 | |
| | 2.9 | 0.2 | 0.0 | 93.6 | | |
| | 0.4 | 0.1 | 0.0 | 30.9 | | |
| Rear Brake | 22 | 134 | 3 | 5 | 164 | |
| | 13.4 | 81.7 | 1.8 | 3.0 | 18.2 | |
| | 15.7 | 29.8 | 21.4 | 1.7 | | |
| | 2.4 | 14.9 | 0.3 | 0.6 | | |
| Front Brake | 1 | 5 | 0 | 1 | 7 | |
| | 14.3 | 71.4 | 0.0 | 14.3 | 0.8 | |
| | 0.7 | 1.1 | 0.0 | 0.3 | | |
| | 0.1 | 0.6 | 0.0 | 0.1 | | |
| Both Brakes | 48 | 98 | 2 | 3 | 151 | |
| | 31.8 | 64.9 | 1.3 | 2.0 | 16.8 | |
| | 34.3 | 21.8 | 14.3 | 1.0 | | |
| | 5.3 | 10.9 | 0.2 | 0.3 | | |
| Swerve | 8 | 65 | 0 | 1 | 74 | |
| | 10.8 | 87.8 | 0.0 | 1.4 | 8.2 | |
| | 5.7 | 14.5 | 0.0 | 0.3 | | |
| | 0.9 | 7.2 | 0.0 | 0.1 | | |
| Lay Down-Slide | 7 | 1 | 0 | 0 | 8 | |
| | 87.5 | 12.5 | 0.0 | 0.0 | 0.9 | |
| | 5.0 | 0.2 | 0.0 | 0.0 | | |
| | 0.8 | 0.1 | 0.0 | 0.0 | | |
| Accelerate | 4 | 2 | 0 | 2 | 8 | |
| | 50.0 | 25.0 | 0.0 | 25.0 | 0.9 | |
| | 2.9 | 0.4 | 0.0 | 0.7 | | |
| | 0.4 | 0.2 | 0.0 | 0.2 | | |
| 1 and 4 | 10 | 93 | 0 | 1 | 104 | |
| | 9.6 | 89.4 | 0.0 | 1.0 | 11.6 | |
| | 7.1 | 20.7 | 0.0 | 0.3 | | |
| | 1.1 | 10.3 | 0.0 | 0.1 | | |
| 2 and 4 | 0 | 4 | 0 | 0 | 4 | |
| | 0.0 | 100.0 | 0.0 | 0.0 | 0.4 | |
| | 0.0 | 0.9 | 0.0 | 0.0 | | |
| | 0.0 | 0.4 | 0.0 | 0.0 | | |
| 3 and 4 | 32 | 43 | 0 | 2 | 77 | |
| | 41.6 | 55.8 | 0.0 | 2.6 | 8.6 | |
| | 22.9 | 9.6 | 0.0 | 0.7 | | |
| | 3.6 | 4.8 | 0.0 | 0.2 | | |
| 4 and 6 | 0 | 1 | 0 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.0 | 0.1 | |
| | 0.0 | 0.2 | 0.0 | 0.0 | | |
| | 0.0 | 0.1 | 0.0 | 0.0 | | |
| Other | 3 | 2 | 0 | 0 | 5 | |
| | 60.0 | 40.0 | 0.0 | 0.0 | 0.6 | |
| | 2.1 | 0.4 | 0.0 | 0.0 | | |
| | 0.3 | 0.2 | 0.0 | 0.0 | | |
| Unknown | 1 | 0 | 9 | 4 | 14 | |
| | 7.1 | 0.0 | 64.3 | 28.6 | 1.6 | |
| | 0.7 | 0.0 | 64.3 | 1.3 | | |
| | 0.1 | 0.0 | 1.0 | 0.4 | | |
| Column Total | 140 | 449 | 14 | 297 | 900 | |
| | 15.6 | 49.9 | 1.6 | 33.0 | 100.0 | |

TABLE 2.17.5. FREQUENCY OF FRONT BRAKE USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|
| Never | 0. | | | |
| sometimes | 1. | 23 | 2.6 | 3.3 |
| Usually | 2. | 159 | 17.7 | 23.1 |
| Always | 3. | 192 | 21.3 | 27.9 |
| Unknown | 8. | 314 | 34.9 | 45.6 |
| N.A. | 9. | 180 | 20.0 | Missing |
| | | 32 | 3.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The prewash phase of an accident is an environment where very basic human reactions take place. In addition, the great majority of motorcycle riders have not had effective or regular training which prepares them for collision **avoidance** actions. Consequently, the precrash performance of most motorcycle riders will relate some very basic human factors problems.

Table 7.17.6 shows the collision avoidance action taken by the driver of the other vehicle involved in collision with the motorcycle. More than **two-thirds** (68.9%) did nothing. In great part, this situation is explainable by the detection failure, where the driver of the other vehicle "did not see the motorcycle", or "did not see it until it was too late".

TABLE 7.17.6. EVASIVE ACTION TAKEN BY OTHER VEHICLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-----------|--------------------|------------------------|------------------------|
| None | 0. | 472 | 52.4 | 68.9 |
| Braking | 1. | 159 | 17.7 | 23.2 |
| Steering | 2. | 4 | 0.4 | 0.6 |
| 1 and 2 | 3. | 29 | 3.2 | 4.2 |
| Accelerate | 4. | 18 | 2.0 | 2.6 |
| Accelerate and Steer | 5. | 3 | 0.3 | 0.4 |
| Unknown | a: | 15 | 1.7 | Missing |
| N.A. | 9. | 200 | 22.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.17.7 compares front brake use and rear brake use for the precrash time of the 900 in-depth accident cases. Reconstruction of the accident events was made by analysis of skid marks, tire tread circumferential striations, control positions, tire impact transfers, suspension displacements, and injury mechanisms for control associated limbs. These factors determined the function

TABLE 7.17.7. MOTORCYCLE REAR BRAKE OPERATION BY FRONT BRAKE OPERATION (OSIDs)

| Rear Brake | Count Row Pct Col Pct Tot Pct | Front Brake | | | | | Row Total |
|---------------------|--|--------------------------|-----------------------------|-----------------------------|-------------------------|---------------------------|--------------|
| | | Not Equipped | Equip., Not Oper | Oper, Not On | On at Accident | Equip., Not Known | |
| Not Equipped | 1 100.0 4.0 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 0.1 |
| Equip., Not Oper | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 20.0 0.2 0.1 | 4 80.0 1.7 0.4 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 5 0.6 |
| Oper, Not On | 11 3.1 44.0 1.2 | 14 3.9 30.9 1.6 | 322 90.2 57.1 35.9 | 8 2.2 3.4 0.9 | 2 0.6 40.0 0.2 | 0 0.0 0.0 0.0 | 357 39.8 |
| On at Accident | 13 2.5 52.0 1.5 | 22 4.3 61.1 2.5 | 239 46.8 42.4 26.7 | 222 43.4 94.9 24.8 | 1 0.2 20.0 0.1 | 14 2.7 43.8 1.6 | 511 57.0 |
| Unknown if On | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 9.1 0.4 0.2 | 0 0.0 0.0 0.0 | 2 9.1 40.0 0.2 | 18 81.8 56.3 2.0 | 22 2.5 |
| Column Total | 25 2.8 | 36 4.0 | 564 62.9 | 234 26.1 | 5 0.6 | 32 3.6 | 896 100.0 |

and operation of the front and rear brakes in these prewash conditions. The rear brake was not equipped or not operational for 0.7% of the accident involved motorcycles. The rear brake was used in 57.0% of the accidents.

The front brake was not equipped or not operational for 6.8% of the accident involved motorcycles. The front brake was used in 26.1% of the accidents.

The data relate to the one special problem of braking for collision avoidance; the motorcycle riders in these accidents underbrake at the front wheel and usually over-brake at the rear wheel. The result is an inability to develop contemporary standards of emergency deceleration and collision avoidance. A vulnerability for accident involvement is sure to be the result.

The deficient collision avoidance braking performance has some obvious remedies. **Bonafide** experience in collision avoidance braking is rare for most street motorcycle riders. Such experience may be beneficial to develop and improve front wheel brake use and reduce rear wheel overbraking control problems. In addition, rider technique and strategy can be improved to enhance collision avoidance braking performance. Experienced riders usually ride in traffic with a couple of fingers already extended to the front brake lever. The reaction time for front brake use is reduced and the utility of front wheel braking is increased. High stress and panic reactions are predominantly

contraction. Thus, extending the fingers to the lever in precrash time requires training and conditioning and is not the untrained typical performance, i.e., the rider would typically grip the throttle more tightly. If the fingers are already extended to **the** lever, the contraction reaction is natural and typical.

Antilock or antiskid braking systems have the potential of eliminating control problems from front or rear wheel overbraking, and perhaps promoting front wheel brake use. The greatest part of these accidents occurred on dry, high friction surfaces so the advantage of **antilock** or antiskid would be elimination of control problems and restoring deceleration on **high** friction surfaces. Of course, the benefits for **low** friction surfaces would be available but those environmental conditions **are not** highly associated with accidents.

Interconnected front and rear brakes for simultaneous operation by a single control may be an advantage in collision avoidance conditions. **However,** most riders seem to prefer the individual controls for ordinary operation. The **Moto Guzzi T-3** brake System is the only System available for study in these data. It would be useful if **some** additional future analysis could distinguish **any** advantage for that interconnected T-3 brake system of the Moto Guzzi. **How-**ever, that equipment **is** of very low representation in these data, and that fact alone may be significant!

The obvious remedy for poor braking performance in collision avoidance action is either experience or training. The data for the 900 on-Scene, in-depth accident cases were separated for various **levels of** motorcycle Street experience and various training received by the rider. Tables 7.17.8 (Appendix C.3) through 7.17.13 (Appendix C.3) portray the various experience levels. Tables 7.17.14 (Appendix C.3) through **7.17.18** (Appendix C.3) portray the **various** training received by the riders.

Table 7.17.19 **summarizes** the rider use **of the** brakes in collision avoidance maneuvers. Front brake use increases with experience, except at high experience **levels.** Generally the **same** impression is accurate for rear brake use. **Com-**bined front and rear brake use also increases with experience, except at high experience levels. The benefits of training received by these **accident-**involved riders is not clear, because no favorable brake use patterns appear for the few trained riders.

Table 7.17.20 shows the precrash control operations for the 900 accident cases.

Table 7.17.21 shows an evaluation to determine if those precrash control operations interfered with collision avoidance action.

Table 7.17.22 (Appendix C.3) is a crosstabulation of these data to distinguish the interfering activities involved with accelerating and turning. In these cases, the accelerating actions preceded a possible demand for braking and the turning actions preceded a need for braking or reversal of turn for collision avoidance.

TABLE 7.17.19. PERCENT OF BRAKE USE BY RIDER IN COLLISION AVOIDANCE ACTION

| Experience | | | | | | | |
|--------------|------------|------------|-------------|-----------|-----------|-----------|-------------------|
| Brake Use | All Levels | 0-6 Months | 7-12 Months | 1-2 Years | 2-3 Years | 3-4 Years | More Than 4 Years |
| Front | 26.1 | 20.5 | 28.9 | 31.8 | 32.3 | 34.4 | 26.6 |
| Rear | 57.0 | 50.6 | 67.5 | 63.6 | 60.2 | 64.1 | 58.7 |
| Front & Rear | 24.8 | 17.9 | 27.7 | 29.9 | 32.3 | 32.8 | 25.3 |
| Total cases | 696 | 156 | 83 | 107 | 93 | 64 | 312 |

| Training | | | | | | | |
|--------------|--------------|-------------|----------------|-------------------|--------------|-------|-----------------------------------|
| Brake use | All Training | Self Taught | Friends/Family | Motorcycle Course | Professional | Other | Motorcycle • Professional + Other |
| Front | 26.1 | 29.6 | 24.3 | 29.3 | 25.0 | 25.0 | 27.7 |
| Rear | 57.0 | 59.4 | 58.2 | 56.1 | 55.0 | 100.0 | 58.5 |
| Front & Rear | 24.8, | 27.6 | 23.4 | 26.8 | 25.0 | 25.0 | 26.2 |
| Total cases | 896 | 399 | 342 | 41 | 20 | 4 | 65 |

TABLE 7.17.20. MOTORCYCLE PRECRASH CONTROL OPERATIONS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 379 | 42.1 | 45.0 |
| Accelerating | 1. | 218 | 24.2 | 25.9 |
| Downshifting | 2. | 61 | 6.8 | 7.2 |
| Braking | 3. | 49 | 5.4 | 5.8 |
| Fuel Adjustment | 4. | 6 | 0.7 | 0.7 |
| Throttle Change | 5. | 29 | 3.2 | 3.4 |
| Turning | 7. | 99 | 11.0 | 11.8 |
| Other | 9. | 1 | 0.1 | 0.1 |
| Unknown | 98. | 58 | 6.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 7.17.21. DID CONTROL OPERATIONS INTERFERE?

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|
| Yes | 1. | 60 | 6.7 | 11.7 |
| No | 2. | 447 | 49.7 | 87.1 |
| Possibly | 3. | 6 | 0.7 | 1.2 |
| Unknown | a. | 64 | 7.1 | Missing |
| N.A. | 9. | 323 | 35.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

7.18 Motorcycle Rider Loss of Control

Table 7.18.1 shows the frequency of the rider loss of control. A great part of these primary (rider) control failures occurred in single vehicle accidents.

TABLE 7.18.1. LOSS OF CONTROL MODE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|-------|--------------------|------------------------|------------------------|
| Capsize | 1. | 42 | 4.7 | 11.8 |
| Wobble | 2. | 5 | 0.6 | 1.4 |
| Weave | 3. | 2 | 0.2 | 0.6 |
| Lost Wheelie | 4. | 9 | 1.0 | 2.5 |
| Slide Out | 5. | 202 | 22.4 | 56.6 |
| High Side | 6. | 19 | 2.1 | 5.3 |
| Wide On Turn | 7. | 77 | 8.6 | 21.6 |
| End Over | 8. | 1 | 0.1 | 0.3 |
| unknown | 98. | 4 | 0.4 | Missing |
| N.A. | 99. | 539 | 59.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.18.2 shows the occurrences of these control problems in the single and multiple vehicle collisions.

The loss of control by capsize (11.8%) usually occurred after collision contact with another vehicle, a fixed object, **or** animal.

The wobble loss of control (1.4%) was that unstable oscillatory motion of the motorcycle front mass. These **cases** were a result of defective repair of a previously damaged motorcycle or modification with improperly installed accessories.

TABLE 7.18.2. LOSS OF CONTROL MODE BY SINGLE/MULTIPLE VEHICLE ACCIDENT (OSIDs)

| | Count Row Pct Col Pct Tot Pct | Single-Vehicle Collision | Multi-Vehicle Collision | ROW Total |
|------------------------|--|-----------------------------|----------------------------|--------------|
| Capsize | 19 45.2 9.0 5.4 | 23 54.8 16.0 6.5 | 42 11.8 | |
| Wobble | 5 100.0 2.4 1.4 | 0 0.0 0.0 0.0 | 5 1.4 | |
| Weave | 2 100.0 0.9 0.6 | 0 0.0 0.0 0.0 | 2 0.6 | |
| Lost Wheelie | 7 77.8 3.3 2.0 | 2 22.2 1.4 0.6 | 9 2.5 | |
| Slide Out | 113 56.4 53.6 31.8 | 87 43.5 60.4 24.5 | 200 56.3 | |
| High Side | 12 63.2 5.7 3.4 | 7 36.8 4.9 2.0 | 19 5.4 | |
| Wide on Turn | 52 67.5 24.6 14.6 | 25 32.5 17.4 7.0 | 77 21.7 | |
| End Over | 1 100.0 0.5 0.3 | 0 0.0 0.0 0.0 | 1 0.3 | |
| | Column Total | 211 59.4 | 144 40.6 | 355 100.0 |

The **weave loss** of control (0.64) **cases** were not associated with high speed but **were** associated with puncture flats and resultant loss of **rear** tire side force stiffness.

The **lost wheelie** was simple to detect in some **cases** and difficult in others. One simple case involved the tread print of a Dunlop F-6 front **tire on an** alley fence beginning 44" above the road surface. Another, more **complex** case. "a" first described by the rider of a high performance **750cc** bike **as a** "high speed wobble". However, factual investigation uncovered a first gear wheelie from a" intersection **stop**, shift to second continuing to lift the front wheel. the" in third gear, the front wheel dropped crooked onto the roadway at 80 mph.

No fundamental lateral-directional dynamic problems of vehicle design **were** present **in** these loss of control accidents. Of course, vehicle speeds in these accidents **were** generally far below the very high speeds necessary to generate the classical lateral-directional stability problems.

The slide out and high side loss of control **were** generally associated with **errors** of **braking**, usually overbraking and skidding of the rear wheel. The total of 61.9% represents this factor as the most typical problem in loss of control. The accident-involved motorcycle riders contributed much to their **own** accident participation by these serious errors then loss of control.

Running wide on a **turn was** involved in 21.6% of the loss of **control** problems and was usually related to **excess** speed entering a turn and **under-**cornering in that turn rather than sliding out. Most **cases** of running wide on a **turn were** single vehicle accidents where the motorcycle ran off the road then collided with some parts of that environment. Other cases involved the motorcycle running wide on a turn and crossing into other traffic and colliding with a" oncoming vehicle.

Table 7.18.3 shows the effect of motorcycle rider training for these accidents involving loss of control. Note that those motorcycle riders without significant training were 91.6% of this group (52.9% self-taught and 38.7% taught by friends-family). One special feature of these data is that all of the lost wheelies and weaves were accounted for by these untrained riders. **Also, most** of the losses of control by running wide on a turn (97.0%) were attributable to these untrained riders. Unfortunately, significant training does not show the **same** advantage in the most frequent loss of control, the slide out, where the untrained riders account for only their fair share of those accident* (92.0%).

Table 7.18.4 shows the effect of motorcycle rider experience for these **accidents** involving loss of control. Generally these data show no distinction for high or low experience, and **even** though the inexperienced rider appears over-represented on running wide on a turn, the quantity is not statistically significant.

Investigator opinions in the analysis of these loss of control accidents provided **some** additional insight into the problems. Those riders involved in slide out loss of control invariably appeared to have no skill or knowledge

TABLE 7.18.3. MOTORCYCLE RIDER TRAINING VERSUS LOSS OF CONTROL MODE (OSIDs)

| | count Row Pct Col Pct Tot Pct | Self Taught | Friends- Family | MC Course | By Professionals | Other | ROW Total |
|-------------------------|--|----------------|--------------------|--------------|---------------------|-------|--------------|
| Capsize | 15 | 14 | 3 | 2 | 0 | 34 | |
| | 44.1 | 41.2 | 8.8 | 5.9 | 0.0 | 10.5 | |
| | 8.8 | 11.2 | 17.6 | 22.2 | 0.0 | | |
| | 4.6 | 4.3 | 0.9 | 0.6 | 0.0 | | |
| Wobble | 1 | 2 | 1 | 1 | 0 | 5 | |
| | 20.0 | 40.0 | 20.0 | 20.0 | 0.0 | 1.5 | |
| | 0.6 | 1.6 | 5.9 | 11.1 | 0.0 | | |
| | 0.3 | 0.6 | 0.3 | 0.3 | 0.0 | | |
| weave | 2 | 0 | 0 | 0 | 0 | 2 | |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.6 | |
| | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Lost Wheelie | 5 | 4 | 0 | 0 | 0 | 9 | |
| | 55.6 | 44.4 | 0.0 | 0.0 | 0.0 | 2.8 | |
| | 2.9 | 3.2 | 0.0 | 0.0 | 0.0 | | |
| | 1.5 | 1.2 | 0.0 | 0.0 | 0.0 | | |
| Slide Out | 98 | 74 | 8 | 6 | 1 | 187 | |
| | 52.4 | 39.6 | 4.3 | 3.2 | 0.5 | 57.9 | |
| | 57.3 | 59.2 | 47.1 | 66.7 | 100.0 | | |
| | 30.3 | 22.9 | 2.5 | 1.9 | 0.3 | | |
| High Side | 10 | 5 | 3 | 0 | 0 | 18 | |
| | 55.6 | 27.8 | 16.7 | 0.0 | 0.0 | 5.6 | |
| | 5.8 | 4.0 | 17.6 | 0.0 | 0.0 | | |
| | 3.1 | 1.5 | 0.9 | 0.0 | 0.0 | | |
| Wide On Turn | 40 | 25 | 2 | 0 | 0 | 67 | |
| | 59.7 | 37.3 | 3.0 | 0.0 | 0.0 | 20.7 | |
| | 23.4 | 20.0 | 11.8 | 0.0 | 0.0 | | |
| End Over | 0 | 1 | 0 | 0 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.3 | |
| | 0.0 | 0.8 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 171 | 125 | 17 | 9 | 1 | 323 | |
| | 52.9 | 30.7 | 5.3 | 2.8 | 0.3 | 100.0 | |

TABLE 7.18.4. RIDER EXPERIENCE ON ACCIDENT INVOLVED
MOTORCYCLE BY LOSS OF CONTROL MODE

| | Count Row Pct Col Pct Tot Pct | Experience | | | | | More Than 4 Years | Row Total |
|-------------------------|--|------------|-------------|-----------|-----------|-----------|----------------------|--------------|
| | | 0-6 Months | 7-12 Months | 1-2 Years | 2-3 Years | 3-4 Years | | |
| Capsize | 23 | 7 | 7 | 1 | 0 | 2 | 40 | |
| | 51.5 | 17.5 | 17.5 | 2.5 | 0.0 | 5.0 | 11.7 | |
| | 11.0 | 14.9 | 16.7 | 5.3 | 0.0 | 14.3 | | |
| | 6.7 | 2.0 | 2.0 | 0.3 | 0.0 | 0.6 | | |
| Wobble | 3 | 0 | 0 | 0 | 2 | 0 | 5 | |
| | 60.0 | 0.0 | 0.0 | 0.0 | 40.0 | 0.0 | 1.5 | |
| | 1.4 | 0.0 | 0.0 | 0.0 | 18.2 | 0.0 | | |
| | 0.9 | 0.0 | 0.0 | 0.0 | 0.6 | 0.0 | | |
| Weave | 0 | 1 | 0 | 0 | 0 | 1 | 2 | |
| | 0.0 | 50.0 | 0.0 | 0.0 | 0.0 | 50.0 | 0.6 | |
| | 0.0 | 2.1 | 0.0 | 0.0 | 0.0 | 7.1 | | |
| | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | 0.3 | | |
| Lost Wheelie | 6 | 0 | 1 | 1 | 1 | 0 | 9 | |
| | 66.7 | 0.0 | 11.1 | 11.1 | 11.0 | 0.0 | 2.6 | |
| | 2.9 | 0.0 | 2.4 | 5.3 | 9.1 | 0.0 | | |
| | 1.7 | 0.0 | 0.3 | 0.3 | 0.3 | 0.0 | | |
| Slide Out | 120 | 29 | 24 | 12 | 5 | 6 | 196 | |
| | 61.2 | 14.8 | 12.2 | 6.1 | 2.6 | 3.1 | 57.1 | |
| | 57.1 | 61.7 | 57.1 | 63.2 | 45.5 | 42.9 | | |
| | 35.0 | 8.5 | 7.0 | 3.5 | 1.5 | 1.7 | | |
| High Side | 11 | 5 | 3 | 0 | 3 | 1 | 19 | |
| | 57.9 | | 15.8 | 0.0 | 15.8 | 5.3 | 5.5 | |
| | 5.2 | 2.1 | 7.1 | 0.0 | 27.3 | 7.1 | | |
| | 3.2 | 0.3 | 0.9 | 0.0 | 0.9 | 0.3 | | |
| Wide On Turn | 46 | 9 | 7 | 5 | 0 | 4 | 71 | |
| | 64.8 | 12.7 | 9.9 | 7.0 | 0.0 | 5.6 | 20.7 | |
| | 21.9 | 19.1 | 16.7 | 26.3 | 0.0 | 28.6 | | |
| | 13.4 | 2.6 | 2.0 | 1.5 | 0.0 | 1.2 | | |
| End Over | 1 | 0 | 0 | 0 | 0 | 0 | 1 | |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | |
| | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 210 | 47 | 42 | 19 | 11 | 14 | 343 | |
| | 61.2 | 13.7 | 12.2 | 5.5 | 3.2 | 4.1 | 100.0 | |

developed for collision avoidance braking, and gave the impression of having no strategy or plan for traffic hazards. In great part, these riders gave the impression that they had made no mental preparation for traffic conflicts and were unprepared to deal with the precrash conditions as they developed.

Also, those riders involved in running wide on a turn loss of control gave the same Impressions of having no plan or strategy for traffic hazards. In those cases where the rider entered a curve at excess speed, the ability to brake effectively was always absent. Also it appeared that most of these riders would lean adversely (they would straighten up rather than lean into the turn) and thereby reduce ground clearance and cornering ability, and many of the collision contact **conditions** confirmed this impression.

These data for the loss-of-control accidents show no real benefit of experience and any isolated advantages for the trained motorcycle rider. This information should not be applied to deny that there is a significant benefit of training because these data compare those riders involved in **loss-of-control** accidents. Training in collision avoidance braking, cornering, and traffic strategy is sure to reduce accident involvement.

7.19 Motorcycle Passenger Sex

Passengers were involved in 17.1% of the 900 on-scene, in-depth accident cases and 14.8% of the 3600 **cases** examined from the police traffic accident reports. **Two** of the on-scene, in-depth accident cases involved **TWO** passengers as well as the rider on the accident-involved motorcycle. Table 7.19.1 shows these data.

TABLE 7.19.1. PASSENGER INVOLVEMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|------|--------------------|------------------------|------------------------|
| Unknown | 0. | 744 | 82.7 | 82.9 |
| | 1. | 152 | 16.9 | 16.9 |
| | 2. | 2 | 0.2 | 0.2 |
| | a. | 2 | 0.2 | Missing |
| TOTAL | | 900 | 100.0 | 100.0 |
| Was Motorcycle Carrying Passenger? (TARs) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| Yes | 1. | 529 | 14.7 | 14.8 |
| No | 2. | 3044 | 84.6 | 85.2 |
| Unknown-Not Reported | 8. | 27 | 0.7 | Missing |
| TOTAL | | 3600 | 100.0 | 100.3 |

Table 7.19.2 shows that 48.7% of the passengers identified in the 900 on-scene, in-depth cases were female, as were 47.9% of the passengers in the 3600 accident reports.

7.20 Motorcycle Passenger Height and Weight

Table 7.20.1 (Appendix C.3) shows the heights of the passengers from the 900 on-scene, in-depth accident cases.

TABLE 7.19.2. PASSENGER SEX (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------------|-----------|--------------------|------------------------|------------------------|
| Male | 1. | 78 | 8.7 | 51.3 |
| Female | 2. | 74 | a.2 | 48.7 |
| N.A.. No Passenger | 9. | 748 | 83.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Passenger Sex (TAR*) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| Female | F. | 252 | 7.0 | 47.9 |
| Male | M. | 274 | 7.6 | 52.1 |
| Unknown | 8. | 30 | 0.8 | Missing |
| N.A., No Passenger | 9. | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

Table 7.20.2 (Appendix C.3) shows the weights of the passengers from the 900 on-scene, in-depth accident **cases**.

7.21 Motorcycle Passenger Occupation

Table 7.21.1 **shows** the occupation of the passenger from the 900 accident cases. **The most** frequent occupation stated **was** student, 38.2%.

7.22 Motorcycle Passenger Experience

Table 7.22.1 (Appendix C.3) **shows** the prior experience of the passenger on the motorcycles of the 900 on-scene, in-depth accident cases. Usually, the passenger is "or experienced, with approximately two-third* of the accident-involved passengers riding **as** passenger only occasionally, or "ever before. Also, Table 7.22.1 shows that the motorcycle rider usually has little experience riding with a passenger.

The carrying of a passenger can interfere with the driving task in many **ways**. The capabilities for braking and the swerving for **collison** avoidance are not significantly degraded by passenger carrying. However loss of control is much more likely during a brake skid or puncture flat. Also, a factor frequently encountered with passenger involvement **was** the distraction of the rider from the driving task, reducing attentiveness to traffic. The data of Table 7.22.1 show such a passenger interference in 27.2% of the **passenger-**involved accidents.

TABLE 7.21.1. PASSENGER OCCUPATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|--------------|--------------------|------------------------|------------------------|
| Professional | 1. | 8 | 0.9 | 5.9 |
| Sales Worker | 3. | 3 | 0.3 | 2.2 |
| Clerical | 4. | 13 | 1.4 | 9.6 |
| Craftsman | 5. | 9 | 1.0 | 6.6 |
| Transport Operator | 7. | 1 | 0.1 | 0.7 |
| Laborers | a. | 20 | 2.2 | 14.7 |
| Service Workers | 11. | 8 | 0.9 | 5.9 |
| Housewife | 13. | 4 | 0.4 | 2.9 |
| Student | 14. | 52 | 5.8 | 38.2 |
| Military | 15. | 1 | 0.1 | 0.7 |
| Unemployed | 17. | 17 | 1.9 | 12.5 |
| Unknown | 98. | 16 | 1.8 | Missing |
| N.A. No. Passenger | 99. | 748 | 83.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

7.23 Motorcycle Passenger Alcohol and Drug Involvement

Table 7.23.1 (Appendix C.3) shows the passenger alcohol involvement for the 900 on-scene, in-depth cases. Of the 154 passengers, 16 (or 10.4%) had been drinking, but the exact involvement was difficult to determine.

Table 7.23.2 (Appendix C.3) shows the data collected for passenger drug involvement shows 3 cases of the passenger use of prescription or non-prescription drugs. These cases were independent of alcohol involvement.

The total involvement was 12.3% of the accident involved passengers.

.24 Other Vehicle Driver Age

Table 7.24.1 shows the age of the driver of the other vehicle involved in collision with the motorcycle in the 900 on-scene, in-depth accident cases. The median age shown in this distribution is 34.4 years.

Table 7.24.2 shows the age of the driver of the other vehicle involved in collision with the motorcycle in the 3600 cases examined from police traffic accident reports. The median age shown in this distribution is 33.0 years.

7.25 Other Vehicle Driver Sex, Marital Status, Children

Table 7.25.1 shows the sex of the driver of the other vehicle involved in collision with the motorcycle. The distribution for the 900 on-scene, in-depth cases shows that 33.0% were female; the distribution for the 3600 traffic accident report cases shows that 34.5% were female.

TABLE 7.24.1. OTHER VEHICLE DRIVER AGE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Age, years | 15. | 1 | 0.1 | 0.2 | 0.2 |
| | 17. | 4 | 0.4 | 0.6 | 0.8 |
| | 18. | 10 | 1.1 | 1.6 | 2.4 |
| | 19. | 17 | 1.9 | 2.8 | 5.2 |
| | 20. | 19 | 2.1 | 3.1 | 8.3 |
| | 21. | 28 | 3.1 | 4.5 | 12.8 |
| | 22. | 25 | 2.8 | 4.1 | 16.9 |
| | 23. | 23 | 2.6 | 3.7 | 20.6 |
| | 24. | 20 | 2.2 | 3.2 | 23.8 |
| | 25. | 27 | 3.0 | 4.4 | 28.2 |
| | 26. | 19 | 2.1 | 3.1 | 31.3 |
| | 27. | 18 | 2.0 | 2.9 | 34.2 |
| | 28. | 17 | 1.9 | 2.8 | 37.0 |
| | 29. | 18 | 2.0 | 2.9 | 39.9 |
| | 30. | 9 | 1.0 | 1.5 | 41.3 |
| | 31. | 13 | 1.4 | 2.1 | 43.4 |
| | 32. | 17 | 1.9 | 2.8 | 46.2 |
| | 33. | 10 | 1.1 | 1.6 | 47.8 |
| | 34. | 9 | 1.0 | 1.5 | 49.3 |
| | 35. | 12 | 1.3 | 1.9 | 51.2 |
| | 36. | 10 | 1.1 | 1.6 | 52.8 |
| | 37. | 11 | 1.2 | 1.8 | 54.6 |
| | 38. | 11 | 1.2 | 1.8 | 56.4 |
| | 39. | 11 | 1.2 | 1.8 | 58.2 |
| | 40. | 10 | 1.1 | 1.6 | 59.8 |
| | 41. | 6 | 0.7 | 1.0 | 60.8 |
| | 42. | 10 | 1.1 | 1.6 | 62.4 |
| | 43. | 4 | 0.4 | 0.6 | 63.0 |
| | 44. | 14 | 1.6 | 2.3 | 65.3 |
| | 45. | 10 | 1.1 | 1.6 | 66.9 |
| | 46. | 12 | 1.3 | 1.9 | 68.9 |
| | 47. | 6 | 0.7 | 1.0 | 69.9 |
| | 48. | 12 | 1.3 | 1.9 | 71.8 |
| | 49. | 9 | 1.0 | 1.5 | 73.3 |
| | 50. | 7 | 0.8 | 1.1 | 74.4 |
| | 51. | 6 | 0.7 | 1.0 | 75.4 |
| | 52. | 7 | 0.8 | 1.1 | 76.5 |
| | 53. | 12 | 1.3 | 1.9 | 78.4 |
| | 54. | 8 | 0.9 | 1.3 | 79.7 |
| | 55. | 4 | 0.4 | 0.6 | 80.4 |
| | 56. | 7 | 0.8 | 1.1 | 81.5 |
| | 57. | 6 | 0.7 | 1.0 | 82.5 |
| | 58. | 7 | 0.8 | 1.1 | 83.6 |
| | 59. | 5 | 0.7 | 1.0 | 84.6 |
| | 60. | 7 | 0.8 | 1.1 | 85.7 |
| | 61. | 8 | 0.9 | 1.3 | 87.0 |
| | 62. | 6 | 0.7 | 1.0 | 88.0 |
| | 63. | 6 | 0.7 | 1.0 | 89.0 |
| | 64. | 7 | 0.8 | 1.1 | 90.1 |
| | 65. | 12 | 1.3 | 1.9 | 92.1 |
| | 66. | 6 | 0.7 | 1.0 | 93.0 |
| | 67. | 3 | 0.3 | 0.5 | 93.5 |
| | 68. | 5 | 0.6 | 0.8 | 94.3 |
| | 69. | 5 | 0.6 | 0.8 | 95.1 |
| | 70. | 2 | 0.2 | 0.3 | 95.5 |
| | 71. | 1 | 0.1 | 0.2 | 95.6 |
| | 72. | 1 | 0.1 | 0.2 | 95.8 |
| | 73. | 1 | 0.1 | 0.2 | 95.9 |
| | 74. | 3 | 0.3 | 0.5 | 96.4 |
| | 75. | 4 | 0.4 | 0.6 | 97.1 |
| | 76. | 3 | 0.3 | 0.5 | 97.6 |
| | 77. | 2 | 0.2 | 0.3 | 97.9 |
| | 78. | 4 | 0.4 | 0.6 | 98.5 |
| | 82. | 2 | 0.2 | 0.3 | 98.9 |
| | 83. | 1 | 0.1 | 0.2 | 99.0 |
| | 85. | 2 | 0.2 | 0.3 | 99.4 |
| | 86. | 3 | 0.3 | 0.5 | 99.8 |
| | 91. | 1 | 0.1 | 0.2 | 100.0 |
| Unknown | 98. | 73 | 8.1 | Missing | 100.0 |
| Not Applicable | 99. | 210 | 23.3 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.24.2. OTHER VEHICLE DRIVER AGE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) | |
|----------------|---|--------------------|------------------------|------------------------|--------------------------|-------|
| Age, years | 3. | 1 | 0.0 | 0.0 | 0.0 | |
| | 6. | 5 | 0.1 | 0.2 | 0.2 | |
| | 7. | 1 | 0.0 | 0.0 | 0.3 | |
| | 8. | 1 | 0.0 | 0.0 | 0.3 | |
| | 9. | 2 | 0.1 | 0.1 | 0.4 | |
| | 10. | 5 | 0.1 | 0.2 | 0.6 | |
| | 11. | 4 | 0.1 | 0.2 | 0.8 | |
| | 12. | 4 | 0.1 | 0.2 | 0.9 | |
| | 13. | 5 | 0.1 | 0.2 | 1.1 | |
| | 14. | 3 | 0.1 | 0.1 | 1.3 | |
| | 15. | 1 | 0.0 | 0.0 | 1.3 | |
| | 16. | 9 | 0.2 | 0.4 | 1.7 | |
| | 17. | 45 | 1.2 | 1.8 | 3.5 | |
| | 18. | 66 | 1.8 | 2.7 | 6.1 | |
| | 19. | 80 | 2.2 | 3.2 | 9.4 | |
| | 20. | 76 | 2.1 | 3.1 | 12.4 | |
| | 21. | 89 | 2.5 | 3.6 | 16.0 | |
| | 22. | 80 | 2.2 | 3.2 | 19.2 | |
| | 23. | 84 | 2.3 | 3.4 | 22.6 | |
| | 24. | 79 | 2.2 | 3.2 | 25.8 | |
| | 25. | 87 | 2.4 | 3.5 | 29.3 | |
| | 26. | 65 | 1.8 | 2.6 | 31.9 | |
| | 27. | 63 | 1.7 | 2.5 | 34.5 | |
| | 28. | 85 | 2.4 | 3.4 | 37.9 | |
| | 29. | 68 | 1.9 | 2.7 | 40.7 | |
| | 30. | 67 | 1.9 | 2.7 | 43.4 | |
| | 31. | 66 | 1.8 | 2.7 | 46.0 | |
| | 32. | 58 | 1.6 | 2.3 | 48.4 | |
| | 33. | 43 | 1.2 | 1.7 | 50.1 | |
| | 34. | 59 | 1.6 | 2.4 | 52.5 | |
| | 35. | 45 | 1.2 | 1.8 | 54.3 | |
| | 36. | 42 | 1.2 | 1.7 | 56.0 | |
| | 37. | 36 | 1.0 | 1.5 | 57.4 | |
| | 38. | 36 | 1.0 | 1.5 | 58.9 | |
| | 39. | 42 | 1.2 | 1.7 | 60.6 | |
| | 40. | 37 | 1.0 | 1.5 | 62.1 | |
| | 41. | 37 | 1.0 | 1.5 | 63.6 | |
| | 42. | 28 | 0.8 | 1.1 | 64.7 | |
| | 43. | 45 | 1.2 | 1.8 | 66.5 | |
| | 44. | 28 | 0.8 | 1.1 | 67.6 | |
| | 45. | 39 | 1.1 | 1.6 | 69.2 | |
| | 46. | 24 | 0.7 | 1.0 | 70.2 | |
| | 47. | 36 | 1.0 | 1.5 | 71.6 | |
| | 48. | 46 | 1.3 | 1.9 | 73.5 | |
| | 49. | 27 | 0.7 | 1.1 | 74.6 | |
| | 50. | 38 | 1.1 | 1.5 | 76.1 | |
| | 51. | 46 | 1.3 | 1.9 | 78.0 | |
| | 52. | 36 | 1.0 | 1.5 | 79.4 | |
| | 53. | 37 | 1.0 | 1.5 | 80.9 | |
| | 54. | 36 | 1.0 | 1.5 | 82.9 | |
| | 55. | 23 | 0.6 | 0.9 | 83.3 | |
| | 56. | 28 | 0.8 | 1.1 | 84.4 | |
| | 57. | 40 | 1.1 | 1.6 | 86.0 | |
| | 58. | 25 | 0.7 | 1.0 | 87.1 | |
| | 59. | 31 | 0.9 | 1.3 | 88.3 | |
| | 60. | 22 | 0.6 | 0.9 | 89.2 | |
| | 61. | 16 | 0.4 | 0.6 | 89.8 | |
| | 62. | 17 | 0.5 | 0.7 | 90.5 | |
| | 63. | 20 | 0.6 | 0.8 | 91.3 | |
| | 64. | 26 | 0.7 | 1.0 | 92.4 | |
| | 65. | 16 | 0.4 | 0.6 | 93.0 | |
| | 66. | 17 | 0.5 | 0.7 | 93.7 | |
| | 67. | 22 | 0.6 | 0.9 | 94.6 | |
| | 68. | 15 | 0.4 | 0.6 | 95.2 | |
| | 69. | 16 | 0.4 | 0.6 | 95.8 | |
| | 70. | 5 | 0.1 | 0.2 | 96.0 | |
| | 71. | 7 | 0.2 | 0.3 | 96.3 | |
| | 72. | 10 | 0.3 | 0.4 | 96.7 | |
| | 73. | 16 | 0.4 | 0.6 | 97.4 | |
| | 74. | 11 | 0.3 | 0.4 | 97.8 | |
| | 75. | 14 | 0.4 | 0.6 | 98.4 | |
| | 76. | 5 | 0.1 | 0.2 | 98.6 | |
| | 77. | 11 | 0.3 | 0.4 | 99.0 | |
| | 80. | 2 | 0.1 | 0.1 | 99.1 | |
| | 81. | 7 | 0.2 | 0.3 | 99.4 | |
| | 82. | 1 | 0.0 | 0.0 | 99.4 | |
| | 83. | 3 | 0.1 | 0.1 | 99.6 | |
| | 84. | 2 | 0.1 | 0.1 | 99.6 | |
| | 85. | 3 | 0.1 | 0.1 | 99.8 | |
| | 86. | 1 | 0.0 | 0.0 | 99.8 | |
| | 87. | 1 | 0.0 | 0.0 | 99.8 | |
| | 89. | 1 | 0.0 | 0.0 | 99.9 | |
| | 90. | 1 | 0.0 | 0.0 | 99.9 | |
| | 92. | 1 | 0.0 | 0.0 | 100.0 | |
| | 100. | 1 | 0.0 | 0.0 | 100.0 | |
| | Unknown & Not Applicable Single Vehicle Acc) | 99. | 1121 | 31.1 | Missing | 100.0 |
| | TOTAL | | 3600 | 100.0 | 100.0 | |

TABLE 7.25.1. OTHER VEHICLE DRIVER SEX (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------------------|-------|--------------------|------------------------|------------------------|
| Male | 1. | 444 | 49.3 | 67.0 |
| Female | 2. | 219 | 24.3 | 33.0 |
| Unknown | a. | 29 | 3.2 | Missing |
| N.A.-No Other Vehicle | 9. | 208 | 23.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Other Vehicle Driver Sex (TARs) | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
| Female | F | 891 | 24.7 | 34.5 |
| Male | M | 1691 | 47.0 | 65.5 |
| Unknown-Not Reported | a | 217 | 6.0 | Missing |
| N.A. Single Veh Acc | 9 | 801 | 22.2 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

Table 7.25.2 shows the marital status of the driver of the other vehicle involved in collision with the motorcycle in the 900 accident cases.

TABLE 7.25.2. OTHER VEHICLE DRIVER MARITAL STATUS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------|-------|--------------------|------------------------|------------------------|
| Single | 1. | 217 | 24.1 | 41.2 |
| Married | 2. | 257 | 28.6 | 48.8 |
| Separated | 3. | 11 | 1.2 | 2.1 |
| Divorced | 4. | 31 | 3.4 | 5.9 |
| Widowed | 5. | 7 | 0.8 | 1.3 |
| Cohabiting | 6. | 4 | 0.4 | 0.8 |
| Unknown | 8. | 164 | 18.2 | Missing |
| N.A.-No Other Vehicle | 9. | 209 | 23.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.25.3 shows the number of children for the driver of the other vehicle involved in collision with the motorcycle in the 900 accident cases.

TABLE 7.25.3. OTHER VEHICLE DRIVER CHILDREN (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 230 | 25.6 | 47.5 | 47.5 |
| | 1. | 75 | 8.3 | 15.5 | 63.0 |
| | 2. | 85 | 9.4 | 17.6 | 80.6 |
| | 3. | 54 | 6.0 | 11.2 | 91.7 |
| | 4. | 25 | 2.8 | 5.2 | 96.9 |
| | 5. | 8 | 0.9 | 1.7 | 98.6 |
| | 6. | 4 | 0.4 | 0.8 | 99.4 |
| Seven Or More | 7. | 3 | 0.3 | 0.6 | 100.0 |
| Unknown | 8. | 207 | 23.0 | Missing | 100.0 |
| N.A.-No Other Vehicle | 9. | 209 | 23.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

7.26 Other Vehicle Driver Education and Occupation

Table 7.26.1 shows the educational background for the drivers of the other vehicle involved in collision with the motorcycle in the 900 on-scene, in-depth accident cases.

TABLE 7.26.1. OTHER VEHICLE DRIVER EDUCATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------|-------|--------------------|------------------------|------------------------|
| Graduate School | 1. | 47 | 5.2 | 9.6 |
| College/Univ. Graduate | 2. | 58 | 6.4 | 11.9 |
| Partial College | 3. | 134 | 14.9 | 27.5 |
| High School | 4. | 138 | 15.3 | 28.3 |
| Partial High School | 5. | 77 | 8.6 | 15.8 |
| Jr. High School | 6. | 16 | 1.8 | 3.3 |
| Less Than 7 Years | 7. | 18 | 2.0 | 3.7 |
| Unknown | 8. | 203 | 22.6 | Missing |
| Not Applicable | 9. | 209 | 23.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.26.2 shows the occupation of the **driver** of the other vehicle in the 900 on-scene, in-depth cases; Table 7.26.3 shows the occupation of the driver of the other vehicle in the 3600 traffic accident report cases. The distributions are comparable for those occupations noted with high frequency.

TABLE 7.26.2 OTHER VEHICLE DRIVER OCCUPATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------------|-----------|--------------------|------------------------|------------------------|
| Professional | 1. | 78 | 8.7 | 13.1 |
| Mgr./Administrator | 2. | 37 | 4.1 | 6.2 |
| Sales Worker | 3. | 23 | 2.6 | 3.9 |
| Clerical | 4. | 52 | 5.8 | 8.7 |
| Craftsman | 5. | 54 | 6.0 | 9.1 |
| Operatives, Non-Tram. | 6. | 4 | 0.4 | 0.7 |
| Transport Operator | 7. | 27 | 3.0 | 4.5 |
| Laborers | a. | 73 | 8.1 | 12.2 |
| Service Workers | 11. | 31 | 3.4 | 5.2 |
| Housewife | 13. | 55 | 6.1 | 9.2 |
| Student | 14. | 70 | 7.8 | 11.7 |
| Military | 15. | 2 | 0.2 | 0.3 |
| Retired | 16. | 35 | 3.9 | 5.9 |
| Unemployed | 17. | 55 | 6.1 | 9.2 |
| Unknown | 98. | 95 | 10.6 | Missing |
| N.A.-No OV | 99. | 209 | 23.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 7.26.4 (Appendix C.3) shows the **Hollingshead** Index of social position for the other vehicle driver in the 900 accident cases.

7.27 Other Vehicle Driver License Qualification

Table 7.27.1 (Appendix C.3) shows the license qualification of the driver of the other vehicle involved in collision with the motorcycle in the 900 accident cases. Unlicensed drivers comprised 6.1% of this accident-involved group.

Table 7.27.2 (Appendix C.3) shows the state of issue of that license qualification for the driver of the other vehicle. Out-of-state drivers were 3.6% of this group.

7.28 Other Vehicle Driver Experience

Table 7.28.1 shows the total driving experience of the driver of the other vehicle involved in collision with the motorcycle in the 900 on-scene, in-depth accident cases. Only 9.4% claimed less than 2 years experience, and the median experience was more than 8 years.

TABLE 7.26.3. OTHER VEHICLE DRIVER OCCUPATION (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|
| Professional | 1. | 182 | 5.1 | 11.2 |
| Administrator | 2. | 132 | 3.7 | 8.1 |
| Sales Worker | 3. | 70 | 1.9 | 4.3 |
| Clerical | 4. | 152 | 4.2 | 9.3 |
| Craftsman | 5. | 134 | 3.7 | 8.2 |
| Operatives | 6. | 41 | 1.1 | 2.5 |
| Tram-Equip. Operative | 7. | 53 | 1.5 | 3.3 |
| Laborers | 8. | 212 | 5.9 | 13.0 |
| Farm Laborers | 10. | 1 | 0.0 | 0.1 |
| Service Worker | 11. | 144 | 4.0 | 8.8 |
| Housewife | 13. | 142 | 3.9 | a.7 |
| Student | 14. | 190 | 5.3 | 11.7 |
| Military | 15. | 4 | 0.1 | 0.2 |
| Retired | 16. | 63 | 1.7 | 3.9 |
| Unemployed | 17. | 108 | 3.0 | 6.6 |
| Unknown-Not Reported | 98. | 1171 | 32.5 | Missing |
| N.A.-Single Veh. Acc. | 99. | 801 | 22.2 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

Table 7.28.2 shows the other vehicle driver experience with the **accident-**involved vehicle. 10.3% had less than 2 weeks experience with that vehicle but the median experience **was** 17.7 months.

Table 7.28.3 shows the accident history of the driver of the other vehicle. During the previous 2 years, 17.4% of those drivers had at least one reportable traffic accident.

An additional special survey **was** made for 68 of the drivers of the other vehicles involved in collision with the motorcycles in the 900 on-scene, in-depth accident **cases**. The objective **was** to recontact those drivers previously interviewed and determine their familiarity with motorcycles. Of course, the riders of the other motorcycles involved in collision with the motorcycles were not included. The results were as follows:

| | <u>Yes</u> | <u>No</u> | <u>Unknown</u> |
|--|------------|-----------|----------------|
| Does O/V driver have motorcycle experience? | 2 | 62 | 4 |
| Is a motorcycle owned by anyone in immediate family? | 1 | 61 | 6 |
| Is anyone in immediate family a regular motorcycle rider or passenger? | 3 | 59 | 4 |

TABLE 7.28.1. OTHER VEHICLE DRIVER TOTAL DRIVING EXPERIENCE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Experience, months | 0. | 7 | 0.8 | 1.4 | 1.4 |
| | 1. | 3 | 0.3 | 0.6 | 2.0 |
| | 3. | 1 | 0.1 | 0.2 | 2.2 |
| | 4. | 3 | 0.3 | 0.6 | 2.7 |
| | 5. | 1 | 0.1 | 0.2 | 2.9 |
| | 6. | 3 | 0.3 | 0.6 | 3.5 |
| | 7. | 2 | 0.2 | 0.4 | 3.9 |
| | 8. | 1 | 0.1 | 0.2 | 4.1 |
| | 9. | 3 | 0.3 | 0.6 | 4.7 |
| | 10. | 1 | 0.1 | 0.2 | 4.9 |
| | 12. | 11 | 1.2 | 2.2 | 7.0 |
| | 13. | 1 | 0.1 | 0.2 | 7.2 |
| | 18. | 7 | 0.8 | 1.4 | 8.6 |
| | 20. | 1 | 0.1 | 0.2 | 8.8 |
| | 21. | 1 | 0.1 | 0.2 | 9.0 |
| | 23. | 2 | 0.2 | 0.4 | 9.4 |
| | 24. | 19 | 2.1 | 3.7 | 13.1 |
| | 25. | 2 | 0.2 | 0.4 | 13.5 |
| | 29. | 3 | 0.3 | 0.6 | 14.1 |
| | 30. | 4 | 0.4 | 0.8 | 14.9 |
| | 33. | 1 | 0.1 | 0.2 | 15.1 |
| | 36. | 18 | 2.0 | 3.5 | 18.6 |
| | 42. | 2 | 0.2 | 0.4 | 19.0 |
| | 47. | 1 | 0.1 | 0.2 | 19.2 |
| | 48. | 15 | 1.7 | 2.9 | 22.1 |
| | 50. | 2 | 0.2 | 0.4 | 22.5 |
| | 51. | 1 | 0.1 | 0.2 | 22.7 |
| | 54. | 2 | 0.2 | 0.4 | 23.1 |
| | 59. | 1 | 0.1 | 0.2 | 23.3 |
| | 60. | 15 | 1.7 | 2.9 | 26.2 |
| | 66. | 1 | 0.1 | 0.2 | 26.4 |
| | 72. | 16 | 1.8 | 3.1 | 29.5 |
| | 84. | 24 | 2.7 | 4.7 | 34.2 |
| 90. | 4 | 0.4 | 0.8 | 35.0 | |
| 96. | 9 | 1.0 | 1.8 | 36.8 | |
| 97. | 323 | 35.9 | 63.2 | 100.0 | |
| Unknown | 98. | 181 | 20.1 | Missing | 100.0 |
| J.A. No OV | 99. | 208 | 23.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.28.2. OTHER VEHICLE DRIVER EXPERIENCE WITH ACCIDENT-INVOLVED VEHICLE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Experience, months | 0. | 52 | 5.8 | 10.3 | 10.3 |
| | 1. | 33 | 3.7 | 6.5 | 16.8 |
| | 2. | 17 | 1.9 | 3.4 | 20.2 |
| | 3. | 13 | 1.4 | 2.6 | 22.7 |
| | 4. | 18 | 2.0 | 3.6 | 26.3 |
| | 5. | 4 | 0.4 | 0.8 | 27.1 |
| | 6. | 16 | 1.8 | 3.2 | 30.2 |
| | 7. | 10 | 1.1 | 2.0 | 32.2 |
| | 8. | 8 | 0.9 | 1.6 | 33.8 |
| | 9. | 13 | 1.4 | 2.6 | 36.4 |
| | 10. | 4 | 0.4 | 0.8 | 37.2 |
| | 11. | 2 | 0.2 | 0.4 | 37.5 |
| | 12. | 35 | 3.9 | 6.9 | 44.5 |
| | 13. | 2 | 0.2 | 0.4 | 44.9 |
| | 14. | 2 | 0.2 | 0.4 | 45.3 |
| | 15. | 3 | 0.3 | 0.6 | 45.8 |
| | 16. | 3 | 0.3 | 0.6 | 46.4 |
| | 17. | 1 | 0.1 | 0.2 | 46.6 |
| | 18. | 23 | 2.6 | 4.5 | 51.2 |
| | 19. | 3 | 0.3 | 0.6 | 51.8 |
| | 20. | 2 | 0.2 | 0.4 | 52.2 |
| | 21. | 2 | 0.2 | 0.4 | 52.6 |
| | 22. | 1 | 0.1 | 0.2 | 52.8 |
| | 23. | 2 | 0.2 | 0.4 | 53.2 |
| | 24. | 44 | 4.9 | 8.7 | 61.9 |
| | 26. | 3 | 0.3 | 0.6 | 62.5 |
| | 27. | 2 | 0.2 | 0.4 | 62.8 |
| | 28. | 3 | 0.3 | 0.6 | 63.4 |
| | 29. | 1 | 0.1 | 0.2 | 63.6 |
| | 30. | 12 | 1.3 | 2.4 | 66.0 |
| | 34. | 1 | 0.1 | 0.2 | 66.2 |
| | 36. | 52 | 5.8 | 10.3 | 76.5 |
| | 37. | 1 | 0.1 | 0.2 | 76.7 |
| | 38. | 3 | 0.3 | 0.6 | 77.3 |
| | 40. | 2 | 0.2 | 0.4 | 77.7 |
| | 41. | 1 | 0.1 | 0.2 | 77.9 |
| | 42. | 4 | 0.4 | 0.8 | 78.7 |
| | 45. | 2 | 0.2 | 0.4 | 79.1 |
| | 47. | 1 | 0.1 | 0.2 | 79.2 |
| | 48. | 18 | 2.0 | 3.6 | 82.3 |
| | 49. | 1 | 0.1 | 0.2 | 83.0 |
| | 51. | 1 | 0.1 | 0.2 | 83.2 |
| | 54. | 1 | 0.1 | 0.2 | 83.4 |
| | 56. | 3 | 0.3 | 0.6 | 84.0 |
| | 60. | 15 | 1.7 | 3.0 | 87.0 |
| | 63. | 1 | 0.1 | 0.2 | 87.2 |
| | 64. | 2 | 0.2 | 0.4 | 87.5 |
| | 67. | 1 | 0.1 | 0.2 | 87.7 |
| | 69. | 1 | 0.1 | 0.2 | 87.9 |
| 70. | 1 | 0.1 | 0.2 | 88.1 | |
| 72. | 13 | 1.4 | 2.6 | 90.7 | |
| 73. | 1 | 0.1 | 0.2 | 90.9 | |
| 75. | 1 | 0.1 | 0.2 | 91.1 | |
| 78. | 2 | 0.2 | 0.4 | 91.5 | |
| 82. | 1 | 0.1 | 0.2 | 91.7 | |
| 84. | 9 | 1.0 | 1.8 | 93.5 | |
| 87. | 1 | 0.1 | 0.2 | 93.7 | |
| 90. | 1 | 0.1 | 0.2 | 93.9 | |
| 96. | 10 | 1.1 | 2.0 | 95.8 | |
| 97. | 21 | 2.3 | 4.2 | 100.0 | |
| Unknown | 98. | 185 | 20.6 | Missing | 100.0 |
| N.A.-No Other Vehicle | 99. | 209 | 23.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.28.3 NUMBER OF OTHER VEHICLE DRIVER ACCIDENTS WITHIN
LAST 2 YEARS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|
| Accidents | 0. | 462 | 51.3 | 82.6 |
| | 1. | 77 | 8.6 | 13.8 |
| | 2. | 12 | 1.3 | 2.1 |
| | 3. | 6 | 0.7 | 1.1 |
| | 4. | 2 | 0.2 | 0.4 |
| Unknown | a. | 132 | 14.7 | Missing |
| N.A. | 9. | 209 | 23.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

These results generally show that the motorcycle is an unfamiliar object in traffic. This fact may be critical in the detection of traffic hazards; the motorcycle may be an unfamiliar as well as inconspicuous object in traffic.

7.29 Other Vehicle Driver Alcohol and Drug Involvement

Table 7.29.1 shows the alcohol and drug involvement for the drivers of the other vehicle involved in collision with the motorcycle. The data for the 900 on-scene, in-depth accident cases shows that 44 other vehicle drivers had some involvement, which is 6.4% of the 691 **cases** with another vehicle driver. The data for the 3600 traffic accident report cases shows 3.7% had some involvement.

Table 7.29.2 shows the blood alcohol level for those drivers of the other vehicles involved in the 900 accident cases.

Table 7.29.3 shows the drug involvement for the other vehicle driver.

TABLE 7.29.1. OTHER VEHICLE DRIVER ALCOHOL-DRUG IMPAIRMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|-----------|--------------------|------------------------|------------------------|--------------------------|
| HBD, Not Under Infl. | 1. | 12 | 1.3 | 27.3 | 27.3 |
| HBD, Under Influence | 2. | 23 | 2.6 | 52.3 | 79.5 |
| HBD, Impairment Unk. | 3. | 7 | 0.8 | 15.9 | 95.5 |
| Combination | 5. | 1 | 0.1 | 2.3 | 97.7 |
| Other | 6. | 1 | 0.1 | 2.3 | 100.0 |
| Unknown | a. | 78 | a.7 | Missing | 100.0 |
| N.A., No Impairment or Single Veh. Acc. | 9. | 778 | 86.4 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Other Vehicle Driver Alcohol-Drug Impairment (TARs) | | | | | |
| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
| HNBD | 1. | 2387 | 66.3 | 96.2 | 96.2 |
| HBD-Influence Unk. | 2. | 88 | 2.4 | 3.5 | 99.8 |
| Drug Inf luence | 3. | 6 | 0.2 | 0.2 | 100.0 |
| Unknown | a. | 315 | 8.7 | Missing | 100.0 |
| N.A., Single Veh. Acc. | 9. | 804 | 22.3 | Missing | 100.0 |
| | TOTAL | 3600 | 100.0 | 100.0 | |

TABLE 7.29.2. OTHER VEHICLE DRIVER BLOOD ALCOHOL LEVEL (PERCENT) (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------|---------|--------------------|------------------------|------------------------|--------------------------|
| Blood Alcohol, (%) | .00 | 562 | 64.2 | 96.6 | 96.6 |
| | .07 | 1 | 0.1 | 0.2 | 96.7 |
| | .10 | 2 | 0.2 | 0.3 | 97.1 |
| | .11 | 1 | 0.1 | 0.2 | 97.3 |
| | .14 | 1 | 0.1 | 0.2 | 97.4 |
| | .16 | 1 | 0.1 | 0.2 | 97.6 |
| | .17 | 3 | 0.3 | 0.5 | 98.1 |
| | .18 | 1 | 0.1 | 0.2 | 98.3 |
| | .19 | 3 | 0.3 | 0.5 | 98.8 |
| | .22 | 2 | 0.2 | 0.3 | 99.1 |
| | .23 | 1 | 0.1 | 0.2 | 99.3 |
| | .25 | 1 | 0.1 | 0.2 | 99.5 |
| | .27 | 1 | 0.1 | 0.2 | 99.7 |
| | .29 | 1 | 0.1 | 0.2 | 99.8 |
| | .36 | 1 | 0.1 | 0.2 | 100.0 |
| | Unknown | .98 | 100 | 11.1 | Missing |
| N.A. | .99 | 218 | 24.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 7.29.3. OTHER VEHICLE DRIVER USE OF DRUGS OTHER THAN ALCOHOL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Prescription Status</u> | | | | | |
| None | 0. | 561 | 62.3 | 99.1 | 99.1 |
| Prescription | 1. | 4 | 0.4 | 0.7 | 99.8 |
| Non-Prescription | 2. | 1 | 0.1 | 0.2 | 100.0 |
| Unknown | 8. | 118 | 13.1 | Missing | 100.0 |
| N.A. | 9. | 216 | 24.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Type of Drug</u> | | | | | |
| None | 0. | 559 | 62.1 | 99.1 | 99.1 |
| Marijuana | 1. | 2 | 0.2 | 0.4 | 99.5 |
| Stimulant | 2. | 1 | 0.1 | 0.2 | 99.6 |
| Depressant- | | | | | |
| Antihistamine | 5. | 1 | 0.1 | 0.2 | 99.8 |
| Multiple | 7. | 1 | 0.1 | 0.2 | 100.0 |
| Unknown | 8. | 127 | 14.1 | Missing | 100.0 |
| N.A. | 9. | 209 | 23.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

8.0 HUMAN FACTORS - INJURIES

This section deals with the injuries suffered by the motorcycle riders and passengers in the accidents which were investigated and analyzed. The most accurate data **were** available from the 900 on-scene, in-depth accident cases, where the injuries were observed directly, obtained from record or interview of the treating physician, or recorded from autopsy. These injuries **are** analyzed for body region, system, severity and mechanism so that cause and severity can be studied for appropriate countermeasures.

8.1 Injuries - General Characteristics

Table 8.1.1 shows the status of injuries for the 900 motorcycle riders and 152 motorcycle passengers involved in the 900 on-scene, in-depth **cases**, and distinguished for the multiple and single vehicle collisions. A special feature of these data is that the riders and passengers suffered some kind of injury in 98% of the multiple vehicle accidents and 96% of the single vehicle accidents. This very high involvement of injury may be due in great part to the character of the accidents as acquired, since accident notification was dependent primarily upon dispatch of a rescue ambulance.

TABLE 8.1.1. INJURY STATUS FOR THE MOTORCYCLE RIDERS
IN THE 900 **OSIDIs**

| | Multiple Vehicle Collisions | | | Single Vehicle Collisions | | |
|---|-----------------------------|------------|------------|---------------------------|-----------|------------|
| | Rider | Passenger | Total | Rider | Passenger | Total |
| No Injury | 12 | 4 | 16 | 9 | 2 | 11 |
| Injury | 619 | 102 | 721 | 203 | 38 | 241 |
| Fatal | 36 | 2 | 38 | 18 | 3 | 21 |
| Total | 667 | 108 | 775 | 230 | 43 | 273 |
| (Note: Unknown status for 2 riders and 1 passenger) | | | | | | |

Also shown in Table 8.1.1 is that the incidence of fatal injury is 4.9% of the multiple vehicle accidents and 7.7% of the single vehicle accidents.

Table 8.1.2 shows the frequency of injury severity for the most severe injuries suffered by the 900 motorcycle riders and the 152 motorcycle passengers involved in the 900 on-scene, in-depth accident cases. The high injury rate typical of motorcycle accidents is shown in these data by the fact that 45.1% of the riders and passengers suffered something **more** than a minor injury, and 24.1% had an injury which was severe, serious, critical or fatal.

TABLE 8.1.2. FREQUENCY OF INJURY SEVERITY FOR MOST SEVERE INJURY, ALL REGIONS RIDERS AND PASSENGERS

| Most Severe Injury | Count | | Rider | Passenger | Row Total |
|---------------------|--------------|---------|--------------|-------------|-----------|
| | Raw Col Tot | Pct Pct | | | |
| None | 21 | | 21 | 5 | 26 |
| | 80.8 | | 80.8 | 19.2 | 2.5 |
| | 2.3 | | 2.3 | 3.3 | |
| | 2.0 | | 2.0 | 0.5 | |
| Minor | 457 | | 457 | 94 | 551 |
| | 62.9 | | 62.9 | 17.1 | 52.4 |
| | 50.8 | | 50.8 | 61.8 | |
| | 43.4 | | 43.4 | a.9 | |
| Moderate | 197 | | 197 | 24 | 221 |
| | 89.1 | | 89.1 | 10.9 | 21.0 |
| | 21.9 | | 21.9 | 15.8 | |
| | 18.7 | | 18.7 | 2.3 | |
| Severe | 105 | | 105 | 17 | 122 |
| | 86.1 | | 86.1 | 13.9 | 11.6 |
| | 11.7 | | 11.7 | 11.2 | |
| | 10.0 | | 10.0 | 1.6 | |
| Serious | 51 | | 51 | 4 | 55 |
| | 92.7 | | 92.7 | 7.3 | 5.2 |
| | 5.7 | | 5.7 | 2.6 | |
| | 4.8 | | 4.8 | 0.4 | |
| Critical | 37 | | 37 | 7 | 44 |
| | 84.1 | | 84.1 | 15.9 | 4.2 |
| | 4.1 | | 4.1 | 4.6 | |
| | 3.5 | | 3.5 | 0.7 | |
| Fatal | 30 | | 30 | 1 | 31 |
| | 96.8 | | 96.8 | 3.2 | 2.9 |
| | 3.3 | | 3.3 | 0.7 | |
| | 2.9 | | 2.9 | 0.1 | |
| Unknown | 2 | | 2 | 0 | 2 |
| | .00.0 | | .00.0 | 0.0 | 0.2 |
| | 0.2 | | 0.2 | 0.0 | |
| | 0.2 | | 0.2 | 0.0 | |
| Column Total | | 900 | 152 | 1052 | |
| | | 85.6 | 14.4 | 100.0 | |

Table 8.1.3 shows the regions of these most severe injuries for the riders and **passenger's** involved in the 900 on-scene, in-depth accident cases. Note that injuries to the extremities are 45.5% of these most severe Injuries in each accident. However, these injuries to the extremities are surely frequent but never any threat to life. The next **most** frequent set of injuries in these data is to the head, neck and face, which comprise a total of 28.5% of the total of most severe injuries.

Note that the areas of the passenger body which benefit from **some** shielding by the rider body in frontal Impact have **lower** incidence, e.g., extremities, pelvis and abdomen.

8.2 Rider and Passenger Positions on the Motorcycle at Crash Impact

Table 8.2.1 shows the rider position on the motorcycle at crash impact. The great majority, 91.1% of the motorcycle riders, were in the normal riding position at the time of crash impact. In reaction to the Imminent collision some riders stood up on the foot pegs (**2.6%**), some riders made a head or shoulder check (**2.1%**), and some riders were in the process of "bailing out."

Table 8.2.2 shows a cross tabulation of this rider precrash action and the overall Severities Sum, $SS = \sum(ALS)^2$. These data show a significantly lower injury Severities Sum for those riders who were dismounting in advance of the **collision**. Two such cases should be described to explain this advantage show". One case involved a" extremely aware and athletic rider who intentionally vaulted over the hood of a car that suddenly blocked his path of travel, the" tumbled and rolled to a stdp with only minor abrasions and contusions. Another case involved the simple but effective action of a rider who lifted his right leg and began dismounting to the left, thereby avoiding the impact of an automobile front corner and bumper on the right leg.

Interpretation of these data allow speculation of great and skillful reactions which are beyond the great majority of motorcycle riders. The precrash events happen in very short time and rider strategy should focus first on preventing accident involvement, then improving collision avoidance action. Dismounting in the precrash time is a last resort, and needs to be reserved for those appropriate times. "Bailing **out**" into the path of a" eighteen wheeler when you have a puncture flat may not be the correct choice -but there may not be alternatives.

The **most** important impressions from these data are that close proximity to the motorcycle at the point of impact is injurious indeed, and the majority of the riders do nothing and crash in the normal seated position.

Table 8.2.3 shows that the great majority of the accident involved passengers (94.6%) were in the normal riding position at the time of the crash impact.

TABLE 8.1.3. REGION OF MOST SEVERE INJURY
RIDERS AND PASSENGERS

| Region | Count | Rider | Passenger | Row Total |
|---------------------|-------------------------------|-------|-----------|-----------|
| | Row Pct Col Pct Tat Pct | | | |
| No Injury | 21 | 5 | 26 | |
| | 80.8 | 19.2 | 2.5 | |
| | 2.3 | 3.3 | | |
| | 2.0 | 0.5 | | |
| Extremities | 419 | 60 | 479 | |
| | 87.5 | 12.5 | 45.5 | |
| | 46.6 | 39.5 | | |
| | 39.8 | 5.7 | | |
| Pelvis | 62 | 8 | 70 | |
| | 88.6 | 11.4 | 6.7 | |
| | 6.9 | 5.3 | | |
| | 5.9 | 0.8 | | |
| Abdomen | 48 | 4 | 52 | |
| | 92.3 | 7.7 | 4.9 | |
| | 5.3 | 2.6 | | |
| | 4.6 | 0.4 | | |
| Chest | 97 | 25 | 122 | |
| | 79.5 | 20.5 | 11.6 | |
| | 10.8 | 16.4 | | |
| | 9.2 | 2.4 | | |
| Face | 53 | 10 | 63 | |
| | 84.1 | 15.0 | 6.0 | |
| | 5.9 | 6.1 | | |
| | 5.0 | 1.0 | | |
| Neck | 30 | 7 | 37 | |
| | 81.1 | 18.9 | 3.5 | |
| | 3.3 | 4.6 | | |
| | 2.9 | 0.7 | | |
| Head | 168 | 32 | 200 | |
| | 84.0 | 16.0 | 19.0 | |
| | 18.7 | 21.1 | | |
| | 16.0 | 3.0 | | |
| Unknown | 1 | 0 | 1 | |
| | 00.0 | 0.0 | 0.1 | |
| | 0.1 | 0.0 | | |
| | 0.1 | 0.0 | | |
| Whole Body | 1 | 1 | 2 | |
| | 50.0 | 50.0 | 0.2 | |
| | 0.1 | 0.7 | | |
| | 0.1 | 0.1 | | |
| Column Total | 900 | 152 | 1052 | |
| | 85.6 | 14.4 | 100.0 | |

TABLE 8.2.1. RIDER POSITION ON MOTORCYCLE AT CRASH IMPACT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------|--------------|--------------------|------------------------|------------------------|
| Normal Seated | 1. | 813 | 90.3 | 91.1 |
| Standing on Pegs | 2. | 23 | 2.6 | 2.6 |
| Head Down | 3. | 5 | 0.6 | 0.6 |
| Check Left | 4. | 5 | 0.6 | 0.6 |
| Check Right | 5. | 8 | 0.9 | 0.9 |
| Dismounting | 6. | 32 | 3.6 | 3.6 |
| Other | 7. | 6 | 0.7 | 0.7 |
| Unknown | 8. | 8 | 0.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

8.3 Motorcycle. Rider and Passenger Motion After Collision Contact

Table 8.3.1 shows the motion of the motorcycle after collision contact for the 900 on-scene, in-depth accident cases. Table 8.3.2 shows the motion of the motorcycle rider after collision contact for the 900 accident cases.

Table 8.3.3 shows the time when the motorcycle and rider separated. The 2.7% of the motorcycle riders who separated from the motorcycle in the precrash time did so intentionally and were dismounting in reaction to the imminent collision. Note that 11.9% of the accidents did not involve separation and the motorcycle and rider were together at the point of rest. A great part of these riders were trapped under the motorcycle.

Table 8.3.4 shows the motion of the accident-involved passenger after collision contact.

Without exception those motorcycle riders and passengers trapped or dragged by the other vehicle had severe or serious injuries (AIS: 3 or 4).

8.4 On-Scene Medical Assistance and Injury Status, Motorcycle Rider and passenger

Table 8.4.1 shows the medical assistance given to the accident-involved motorcycle rider at the accident scene. Table 8.4.2 describes the details of that on-scene medical treatment given to the motorcycle rider. Table 8.4.3 shows the injury status for the motorcycle rider. These data show that 56.4% of the accident-involved motorcycle riders had no injury, or required only limited treatment for minor injuries, but 36.3% had injuries requiring significant medical care. Most of the fatally injured riders were dead shortly after the accident, usually at the accident scene.

**TABLE 8.2.2. RIDER PRECRASH POSITION ON MOTORCYCLE
BY OVERALL SEVERITIES SUM (OSIDs)**

| | Count | | | | | | | |
|----------------------------|----------------|-------------|-------------|-------------|------------|---------|-------|--------------|
| | Row Pct | a | 6 | 11 | 26 | 51 | More | Row |
| | Col Pct | Through | Through | Through | Through | Through | Than | Total |
| | Tot Pct | 5 | 10 | 25 | 50 | 100 | 100 | |
| Normal Seated | | 391 | 180 | 142 | 45 | 26 | 29 | 813 |
| | | 4a.1 | 22.1 | 17.5 | 5.5 | 3.2 | 3.6 | 90.3 |
| | | 88.3 | 91.4 | 92.2 | 95.7 | 86.7 | 100.0 | |
| | | 43.4 | 20.0 | 15.8 | 5.0 | 2.9 | 3.2 | |
| Standing on Pegs | | 11 | 6 | 4 | 1 | 1 | 0 | 23 |
| | | 47.8 | 26.1 | 17.4 | 4.3 | 4.3 | 0.0 | 2.6 |
| | | 2.5 | 3.0 | 2.6 | 2.1 | 3.3 | 0.0 | |
| | | 1.2 | 0.7 | 0.4 | 0.1 | 0.1 | 0.0 | |
| Head Down | | 1 | 2 | 0 | 0 | 2 | 0 | 5 |
| | | 20.0 | 40.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.6 |
| | | 0.2 | 1.0 | 0.0 | 0.0 | 6.7 | 0.0 | |
| | | 0.1 | 0.2 | 0.0 | 0.0 | 0.2 | 0.0 | |
| Check Left | | 2 | 1 | 2 | 0 | 0 | 0 | 5 |
| | | 40.0 | 20.0 | 40.0 | 0.0 | 0.0 | 0.0 | 0.6 |
| | | 0.5 | 0.5 | 1.3 | 0.0 | 0.0 | 0.0 | |
| | | 0.2 | 0.1 | 0.2 | 0.0 | 0.0 | 0.0 | |
| Check Right | | 3 | 3 | 2 | 0 | 0 | 0 | a |
| | | 37.5 | 31.5 | 21.3 | 0.0 | 0.0 | 0.0 | 0.9 |
| | | 0.7 | 0.3 | 0.2 | 0.0 | 0.0 | 0.0 | |
| | | 0.3 | | | 0.0 | 0.0 | 0.0 | |
| Dismounting | | 26 | 3 | 3 | 0 | 0 | 0 | 32 |
| | | a1.3 | 9.4 | 9.4 | 0.0 | 0.0 | 0.0 | 3.6 |
| | | 5.9 | 1.5 | 1.9 | 0.0 | 0.0 | 0.0 | |
| | | 2.9 | 0.3 | 0.3 | 0.0 | 0.0 | 0.0 | |
| Other | | 4 | 1 | 1 | 0 | 0 | 0 | 6 |
| | | 66.7 | 16.7 | 16.7 | 0.0 | 0.0 | 0.0 | 0.7 |
| | | 0.9 | 0.5 | 0.6 | 0.0 | 0.0 | 0.0 | |
| | | 0.4 | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | |
| Unknown | | 5 | 1 | 0 | 1 | 1 | 0 | 8 |
| | | 62.5 | 12.5 | 0.0 | 12.5 | 12.5 | 0.0 | 0.9 |
| | | 1.1 | 0.5 | 0.0 | 2.1 | 3.3 | 0.0 | |
| | | 0.6 | 0.1 | 0.0 | 0.1 | 0.1 | 0.0 | |
| Column | | 443 | 197 | 154 | 47 | 30 | 29 | 900 |
| Total | | 49.2 | 21.9 | 17.1 | 5.2 | 3.3 | 3.2 | 100.0 |

TABLE 8.2.3. PASSENGER POSITION ON MOTORCYCLE AT CRASH IMPACT
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Normal Seated | 1. | 139 | 15.4 | 94.6 |
| Standing | 2. | 2 | 0.2 | 1.4 |
| Head Down | 3. | 1 | 0.1 | 0.7 |
| Check Right | 5. | 2 | 0.2 | 1.4 |
| Dismounting | 6. | 3 | 0.3 | 2.0 |
| Unknown | a. | 4 | 0.4 | Missing |
| N.A. | 9. | 749 | 83.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.3.1. MOTORCYCLE POST-CRASH MOTION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------------|-------|--------------------|------------------------|------------------------|
| Remained at POI | 0. | 235 | 26.1 | 26.2 |
| Deflected to Side | 1. | 263 | 29.2 | 29.3 |
| Became Airborne | 2. | 7 | 0.8 | 0.8 |
| Slid to Stop | 3. | 309 | 34.3 | 34.4 |
| End-Overs | 4. | 13 | 1.4 | 1.4 |
| Trapped Trapped by OV | 5. | 65 | 7.2 | 7.2 |
| Unknown | a. | 2 | 0.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.3.2. MOTORCYCLE RIDER POST-CRASH MOTION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|
| Stopped Near POI | 0. | a2 | 9.1 | 9.3 |
| Vaulted From MC | 1. | 240 | 26.7 | 27.1 |
| Fell From MC | 2. | 233 | 25.9 | 26.4 |
| Tumbled or Rolled | 3. | 115 | 12.8 | 13.0 |
| Slid to Stop | 4. | 103 | 11.4 | 11.7 |
| Trapped Under MC | 5. | 79 | a.8 | a.9 |
| Trapped Under OV | 6. | 21 | 2.3 | 2.4 |
| Struck and Dragged by OV | 7. | 11 | 1.2 | 1.2 |
| Unknown | a. | 6 | 0.7 | Missing |
| NA | 9. | 10 | 1.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.3.3. MOTORCYCLE AND RIDER SEPARATION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-------------------|-------|--------------------|------------------------|
| Pre-Crash | 1. | 24 | 2.7 |
| Crash | 2. | 457 | 50.8 |
| Post-Crash | 3. | 305 | 33.9 |
| Unknown | a. | 7 | 0.8 |
| NA, No Separation | 9. | 107 | 11.9 |
| | TOTAL | 900 | 100.0 |

TABLE 8.3.4. PASSENGER POST-CRASH MOTION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|--------------|--------------------|------------------------|------------------------|
| Stopped Near POI | 0. | 22 | 2.4 | 14.3 |
| Vaulted From MC | 1. | 33 | 3.7 | 21.4 |
| Fell From MC | 2. | 48 | 5.3 | 31.2 |
| Tumbled or Rolled | 3. | 22 | 2.4 | 14.3 |
| Slid to Stop | 4. | 15 | 1.7 | 9.7 |
| Trapped Under MC | 5. | 7 | 0.8 | 4.5 |
| Trapped Under OV | 6. | 6 | 0.7 | 3.9 |
| Struck and Dragged by OV | 7. | 1 | 0.1 | 0.6 |
| Unknown | 8. | 1 | 0.1 | Missing |
| NA | 9. | 745 | 82.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.4.1. MEDICAL ASSISTANCE TO MOTORCYCLE RIDER

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|--------------|--------------------|------------------------|------------------------|
| None | 0. | 118 | 13.1 | 13.1 |
| Private Ambulance | 1. | 9 | 1.0 | 1.0 |
| Public Ambulance | 2. | 736 | 81.8 | 82.2 |
| M.D. On-Scene | 3. | 1 | 0.1 | 0.1 |
| Coroner | 4. | 18 | 2.0 | 2.0 |
| Private Party | 5. | 9 | 1.0 | 1.0 |
| Police | 6. | 6 | 0.7 | 0.7 |
| Other | 7. | 1 | 0.1 | 0.1 |
| Unknown | 8. | 2 | 0.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.4.2. MOTORCYCLE RIDER ON-SCENE MEDICAL TREATMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------------------|-------|--------------------|------------------------|------------------------|
| <u>Hemorrhage Control - Rider</u> | | | | |
| None | 0. | 521 | 57.9 | 61.4 |
| Yes | 1. | 327 | 36.3 | 38.6 |
| Unknown | 8. | 52 | 5.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Splinting of Limbs - Rider</u> | | | | |
| None | 0. | 576 | 64.0 | 68.1 |
| Yes | 1. | 270 | 30.0 | 31.9 |
| Unknown | 8. | 54 | 6.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Resuscitation - Rider</u> | | | | |
| None | 0. | 815 | 90.6 | 96.0 |
| Yes | 1. | 34 | 3.8 | 4.0 |
| Unknown | 8. | 51 | 5.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>I.V. or Injections - Rider</u> | | | | |
| None | 0. | 741 | 82.3 | 88.4 |
| Yes | 1. | 97 | 10.8 | 11.6 |
| Unknown | 8. | 62 | 6.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Cardio Vascular RX - Rider</u> | | | | |
| None | 0. | 828 | 92.0 | 97.4 |
| Yes | 1. | 22 | 2.4 | 2.6 |
| Unknown | 8. | 50 | 5.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>RX of Head Wounds - Rider</u> | | | | |
| None | 0. | 769 | 85.4 | 90.0 |
| Yes | 1. | 85 | 9.4 | 10.0 |
| Unknown | 8. | 46 | 5.1 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.4.3. MOTORCYCLE RIDER INJURY STATUS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------------------|-------|--------------------|------------------------|------------------------|
| First Aid-Scene Treated, Released | 1. | 80 | 8.9 | 10.1 |
| Hos. < 24 Hrs | 2. | 328 | 36.4 | 41.6 |
| Hosp. Significant Rx | 3. | 29 | 3.2 | 3.7 |
| Outpatient Care | 4. | 219 | 24.3 | 27.8 |
| Dead on Scene | 5. | 79 | 8.8 | 10.0 |
| Dead on Arrival | 6. | 31 | 3.4 | 3.9 |
| Fatal Other Within Fatal 24 Hrs | 7. | 10 | 1.1 | 1.3 |
| | 8. | 11 | 1.0 | 1.1 |
| | 9. | | 0.4 | 0.5 |
| Unknown | 98. | 4 | 0.4 | Missing |
| N A No Injury or No Treatment | 99. | 107 | 11.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 8.4.4 (Appendix C.4) shows the medical assistance given to the 152 passengers involved in the 900 on-scene, in-depth accident cases. Table 8.4.5 (Appendix C.4) describes the details of that on-scene medical treatment given to **the passengers**. Table 8.4.6 (Appendix C.4) shows the injury status for the motorcycle passengers. The passenger data show that 37.9% of the motorcycle passengers had injuries requiring significant medical care.

The high participation of public rather than private ambulance activity was due to the fact that the Los Angeles Fire Department provides the public ambulance response to the scenes of traffic accidents. The victims were transported to the emergency rooms of nearby hospitals under contract to the City of Los Angeles for emergency medical service.

8.5 Somatic (Body) Region Injuries

Table 8.5.1 shows the motorcycle rider injury severity for the 3600 traffic accident report cases. Table 8.5.2 shows the location of the rider somatic injuries defined by those 3600 traffic accident reports. (In these data, "somatic" is used to describe everything other than head and neck.)

Table 8.5.3 shows the motorcycle passenger injury severity for the 3600 traffic accident report cases. Table 8.5.4 shows the location of the passenger somatic injuries defined by those 3600 traffic accident reports.

In general, the extraction of injury data from the traffic accident reports was difficult and required truly excess effort in interpretation. Case-by-case comparison with the 900 on-scene in-depth cases showed a low fidelity of injury representation by the traffic accident reports. As an extreme, it would be expected that the fatal accident cases would be closely represented by the traffic

TABLE 8.5.3. MOTORCYCLE PASSENGER INJURY SEVERITY
(TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| Major | A | 5 | 1.6 | 11.0 |
| Minor | B | 234 | 7.9 | 54.7 |
| Complaint of Pain | C | 114 | 3.2 | 22.0 |
| Fatal | K | 3 | 0.1 | 0.6 |
| None | O | 61 | 1.7 | 11.8 |
| Unknown-Not Reported | S | 37 | 1.0 | Missing |
| N.A.-No Passenger | 9 | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 8.5.4. MOTORCYCLE PASSENGER SOMATIC INJURY LOCATION
(TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------------|-------|--------------------|------------------------|------------------------|
| <u>MC Passenger Torso Injury</u> | | | | |
| None | 0. | 327 | 9.1 | 70.3 |
| Yes | 1. | 138 | 3.3 | 29.7 |
| Unknown-Not Reported | 8. | 91 | 2.5 | Missing |
| N.A.-No Passenger | 9. | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |
| <u>MC Passenger Arm Injury</u> | | | | |
| None | 0. | 301 | 8.4 | 64.7 |
| Yes | 1. | 164 | 4.6 | 35.3 |
| Unknown-Not Reported | 8. | 91 | 2.5 | Missing |
| N.A.-No Passenger | 9. | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |
| <u>MC Passenger Leg Injury</u> | | | | |
| None | 0. | 206 | 5.7 | 44.3 |
| Yes | 1. | 259 | 7.2 | 55.7 |
| Unknown-Not Reported | 8. | 92 | 2.6 | Missing |
| N.A.-No Passenger | 9. | 3043 | 84.5 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

accident reports. This was not the case here. The fatal accident cases in the 900 on-scene, in-depth investigations are contained completely within the 3600 traffic accident reports examined. For comparison, examine the following:

| | <u>900 OSIDs</u> | <u>3600 TARs</u> |
|-----------------------------|------------------|------------------|
| Motorcycle Rider Fatalities | 54 | 44 |
| Passenger Fatalities | 5 | 3 |

A comparison of the **two** data sets confirms that the traffic accident reports do not report those deaths that occur some time (e.g. 48 hours) after the accident, as in the case of a later death due to burns or head injury.

Table 8.5.5 shows the body region of injuries to the motorcycle riders involved in the 900 on-scene, in-depth cases. These 900 riders suffered 3016 discrete injuries to the body (not including head and neck regions). The regions of highest frequency were the knee (14.3%) and the lower leg (14.1%). These injuries to the knee and lower leg were very common, and sometimes serious or severe, but never a threat to life. Those serious and severe injuries to the knee and lower leg generally showed long periods of recovery and/or disablement for the victim.

In order to compare the data of Table 8.5.5 with the previous data from the 3600 traffic accident reports, these injuries are combined as follows:

| ARMS | | LEGS | | TORSO | |
|-------|------|-------|------|-------|-----|
| A | 3.3% | K | 14.3 | B | 4.4 |
| E | 5.6 | L | 14.1 | C | 6.9 |
| R | 5.8 | Q | 8.5 | M | 7.1 |
| S | 5.3 | T | 7.5 | O | 0.2 |
| w | 11.3 | | | P | 5.8 |
| X | 0.2 | | | Y | 0.2 |
| <hr/> | | <hr/> | | <hr/> | |
| 31.5% | | 44.4% | | 24.6% | |

Then comparing,

| | <u>900 OSIDs</u> <u>3016 Injuries</u> | <u>3600 TARs</u> <u>Any Injury</u> |
|-------|--|---------------------------------------|
| ARMS | 31.5% | 38.2% |
| LEGS | 44.4% | 61.1% |
| TORSO | 24.6% | 31.8% |

Thus, the traffic accident reports data seem to **excessively** represent somatic injury information.

TABLE 8.5.5. SOMATIC INJURY BODY REGION
(OSIDs)

| category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|--------------|--------------------|------------------------|------------------------|
| Upper Arm | A | 98 | 3.2 | 3.3 |
| Back | B | 132 | 4.4 | 4.4 |
| Chest | C | 207 | 6.9 | 6.9 |
| Elbow | E | 163 | 5.6 | 5.6 |
| Knee | K | 432 | 14.3 | 14.3 |
| Lower Leg | L | 424 | 14.1 | 14.1 |
| Abdomen | M | 215 | 7.1 | 7.1 |
| Whole Body | O | 6 | 0.2 | 0.2 |
| Pelvis/Hip | P | 176 | 5.5 | 5.5 |
| Ankle/Foot | Q | 256 | 5.5 | 8.5 |
| Forearm | R | 174 | 5.5 | 5.8 |
| Shoulders | S | 161 | 5.3 | 5.3 |
| Thigh | T | 211 | 7.0 | 7.0 |
| Unknown | U | 4 | 0.1 | 0.1 |
| Wrist/Hand | W | 341 | 11.3 | 11.3 |
| Upper Extremities | X | 6 | 0.2 | 0.2 |
| Trunk | Y | 5 | 0.2 | 0.2 |
| | TOTAL | 3016 | 100.0 | 100.0 |

Chest injuries were frequent (6.9%) and had the greatest prospect for critical or fatal results. Typical life-threatening injuries to the chest were rib fractures associated with lacerated lungs and major blood vessels, and circulatory system parts which were lacerated and ruptured from impact inertial loading.

Table 8.5.6 shows the side of the rider somatic injury for the 900 on-scene, in-depth accident cases. The distribution of these injuries shows no dominance of right or left side injuries; the distribution shows essentially symmetrical injuries.

TABLE 8.5.6. SIDE OF RIDER SOMATIC INJURY
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|
| Bilateral | B | 390 | 12.9 | 13.0 |
| Central | c | 229 | 1.6 | 7.6 |
| Left | L | 1207 | 40.0 | 40.2 |
| Right | R | 1175 | 39.0 | 39.2 |
| Unknown | U | 15 | 0.5 | Missing |
| | TOTAL | 3016 | 100.0 | 100.0 |

Table 8.5.7 shows the type of lesion for the 3016 discrete somatic injuries. As expected for the exposed, and sometimes lightly protected somatic regions, abrasions predominate as 37.2% of all injuries. Of course in many of the minor accidents, abrasions were the only injury. It was rare that the abrasion injury had high severity since any substantial clothing will reduce abrasion injury. The outstanding case of high severity abrasion involved a motorcycle rider wearing only a Speedo bathing suit and falling on the abrasive asphalt paving at 32 mph.

Fractures and dislocations accounted for 16.0% of all injuries to the accident-involved motorcycle riders.

Table 8.5.8 shows the system or organ involved in the 3016 somatic injuries. It is clear that the exposed outer body surface of the motorcycle rider sustained the greatest part of these injuries; the abrasions, contusions and lacerations of the integument accounted for 64.7% of all the somatic injuries. Fractures, dislocations sprains, etc., of the skeletal structure (and joints) accounted for 22.7% of all the somatic injuries. Of course, those less frequent injuries to the arteries and heart were a far greater threat to life and were associated with much more severe accident impacts.

Table 8.5.9 shows the severity of the 3016 discrete somatic injuries. 75.1% of those injuries were minor, and most were **integumentary** abrasions. Only 12 of the injuries were fatal, although the data include 54 rider fatalities. The majority of those 54 fatalities were due to the combined effects of several injuries, many of which were critical injuries.

TABLE 8.5.7. RIDER SOMATIC INJURY. SYSTEM-ORGAN INVOLVED (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-----------------|-------|--------------------|------------------------|
| Abrasion | A | 1123 | 37.2 |
| Burn | B | 11 | 0.4 |
| Contusion | C | 663 | 22.0 |
| Dislocation | D | 33 | 1.1 |
| Fracture | F | 449 | 14.9 |
| Swelling | G | 25 | 0.8 |
| Hemorrhage | H | 22 | 0.7 |
| Laceration | L | 352 | 11.7 |
| Amputation | M | 5 | 0.2 |
| Crushing | N | 5 | 0.2 |
| Other | O | 2 | 0.0 |
| Pain | P | 200 | 6.6 |
| Rupture | R | 17 | 0.6 |
| Sprain | S | 89 | 3.0 |
| Unknown | U | 4 | 0.1 |
| Avulsion | V | 16 | 0.5 |
| | TOTAL | 3016 | 100.0 |

TABLE 8.5.8. RIDER SOMATIC INJURY, TYPE OF LESION
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|
| Arteries | A | 17 | 0.6 | 0.6 |
| Digestive | D | 6 | 0.2 | 0.2 |
| Urogenital | G | 119 | 3.9 | 4.1 |
| Heart | H | 17 | 0.6 | 0.6 |
| Integumentary | I | 1872 | 62.1 | 64.7 |
| Joints | J | 195 | 6.5 | 6.8 |
| Kidney | K | 7 | 0.2 | 0.2 |
| Liver | L | 19 | 0.6 | 0.6 |
| Muscle | M | 78 | 2.6 | 2.7 |
| Nervous system | N | 1 | 0.0 | 0.0 |
| Pulmonary/Lung | P | 37 | 1.2 | 1.3 |
| Spleen | Q | 17 | 0.6 | 0.6 |
| Respiratory | R | 1 | 0.0 | 0.0 |
| Skeletal | S | 420 | 13.9 | 14.5 |
| Unknown | U | 120 | 3.9 | Missing |
| Vertebrae | V | 40 | 1.3 | 1.4 |
| All Systems in Region | W | 50 | 1.7 | 1.8 |
| | TOTAL | 3016 | 100.0 | 100.0 |

TABLE 8.5.9. RIDER SOMATIC INJURY SEVERITY
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|-------|--------------------|------------------------|
| Minor | 1 | 2263 | 75.0 |
| Moderate | 2 | 384 | 12.7 |
| Severe | 3 | 216 | 7.2 |
| Serious | 4 | 99 | 3.3 |
| Critical | 5 | 40 | 1.3 |
| Fatal | 6 | 12 | 0.4 |
| Unknown | 8 | 2 | 0.0 |
| | TOTAL | 3016 | 100.0 |

Table 8.5.10 shows the rider somatic injuries collected according to manufacturer of the accident-involved motorcycle.

The last column of this table compares the frequency of that motorcycle make in the accident population. From this comparison it is seen that there is no significant over- or under-representation of injuries; each make accounts for its approximate fair share of injuries.

Table 8.5.11 shows the rider somatic injuries collected according to the engine displacement of the accident-involved motorcycles. Detailed examination of these data and comparison with the accident-involved population provides the following information:

(i) Motorcycles of **250cc** or less-are 22.6% of the accident population and account for 20.9% of these rider somatic injuries.

(ii) Motorcycles of **500cc** or less are 55.9% of the accident population and account for 57.4% of these rider somatic injuries.

(iii) Motorcycles of **750cc** or greater are 33.0% of the accident population and account for 35.1% of these rider somatic injuries.

(iv) **350cc** motorcycles are 14.1% of the accident population and account for 13.9% of these rider somatic injuries.

(v) **750cc motorcycles** are 17.5% of the accident population and account for 19.2% of these rider somatic injuries.

(vi) **1200cc** motorcycles are 7.3% of the accident population and account for 8.3% of these rider somatic injuries.

TABLE 8.5.10. RIDER SOMATIC INJURIES AND MOTORCYCLE MANUFACTURER (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Motorcycle Population (%) |
|-------------------|------------|--------------------|------------------------|------------------------|---------------------------|
| BMW | 3. | 47 | 1.6 | 1.6 | 1.6 |
| BSA | 4. | 28 | 0.9 | 0.9 | 0.9 |
| Bultaco | 6. | 2 | 0.1 | 0.1 | 0.1 |
| CZ | 8. | 6 | 0.2 | 0.2 | 0.2 |
| Cat-HPE | 9. | 5 | 0.2 | 0.2 | 0.1 |
| Ducati | 14. | 8 | 0.3 | 0.3 | 0.2 |
| Harley-Davidson | 20. | 343 | 11.4 | 11.4 | 10.5 |
| Honda | 23. | 1636 | 54.2 | 54.2 | 55.7 |
| Indian | 25. | 2 | 0.1 | 0.1 | 0.1 |
| Jawa | 26. | 11 | 0.4 | 0.4 | 0.3 |
| Kawasaki | 28. | 234 | 7.8 | 7.8 | 8.1 |
| Moto Guzzi | 35. | 25 | 0.8 | 0.8 | 0.8 |
| Norton | 40. | 24 | 0.8 | 0.8 | 0.7 |
| Puch | 44. | 3 | 0.1 | 0.1 | 0.1 |
| Riverside | 46. | 3 | 0.1 | 0.1 | 0.1 |
| Sachs | 50. | 8 | 0.3 | 0.3 | 0.2 |
| Suzuki | 54. | 148 | 4.9 | 4.9 | 4.4 |
| Triumph | 55. | 60 | 2.0 | 2.0 | 2.0 |
| Vespa | 60. | 23 | 0.8 | 0.8 | 0.8 |
| Yamaha | 62. | 378 | 12.5 | 12.5 | 12.2 |
| Motobecane | 65. | 22 | 0.7 | 0.7 | 0.4 |
| | OTAL | 3016 | 100.0 | 100.0 | |

TABLE 8.5.11. RIDER SOMATIC INJURIES AND MOTORCYCLE SIZE
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Engine Displacement, cc | 49. | 14 | 0.5 | 0.5 | 0.5 |
| | 50. | 41 | 1.4 | 1.4 | 1.8 |
| | 60. | 7 | 0.2 | 0.2 | 2.1 |
| | 70. | 19 | 0.6 | 0.6 | 2.7 |
| | 73. | 6 | 0.2 | 0.2 | 2.9 |
| | 75. | 5 | 0.2 | 0.2 | 3.1 |
| | 80. | 19 | 0.6 | 0.6 | 3.7 |
| | 83. | 5 | 0.2 | 0.2 | 3.8 |
| | 90. | 55 | 1.8 | 1.8 | 5.7 |
| | 100. | 72 | 2.4 | 2.4 | 8.1 |
| | 120. | 1 | 0.0 | 0.0 | 3.1 |
| | 125. | 127 | 4.2 | 4.2 | 12.3 |
| | 127. | 2 | 0.1 | 0.1 | 12.4 |
| | 150. | 16 | 0.5 | 0.5 | 12.9 |
| | 160. | 6 | 0.2 | 0.2 | 13.1 |
| | 175. | a7 | 2.9 | 2.9 | 16.0 |
| | 180. | 3 | 0.1 | 0.1 | 16.1 |
| | 185. | 5 | 0.2 | 0.2 | 16.3 |
| | 200. | 27 | 0.9 | 0.9 | 17.2 |
| | 250. | 115 | 3.5 | 3.5 | 21.0 |
| | 305. | 25 | 0.3 | 0.8 | 21.8 |
| | 350. | 420 | 13.9 | 13.9 | 35.7 |
| | 360. | 130 | 4.3 | 4.3 | 40.1 |
| | 380. | 26 | 0.9 | 0.9 | 40.9 |
| | 400. | 183 | 6.1 | 6.1 | 47.0 |
| | 450. | 107 | 3.5 | 3.6 | 50.5 |
| | 500. | 209 | 6.9 | 6.9 | 57.5 |
| | 550. | 115 | 3.5 | 3.3 | 61.3 |
| | 600. | 7 | 0.2 | 0.2 | 61.5 |
| | 650. | 99 | 3.3 | 3.3 | 64.3 |
| | 750. | 577 | 19.1 | 19.2 | 84.0 |
| | 800. | 2 | 0.1 | 0.1 | 84.0 |
| 550. | 30 | 1.0 | 1.0 | 85.0 | |
| 900. | 94 | 3.1 | 3.1 | 88.2 | |
| 1000. | 107 | 3.5 | 3.6 | 91.7 | |
| 120c. | 250 | 8.3 | 5.3 | 100.0 | |
| nknown | 9993. | 3 | 0.1 | Missing | 100.0 |
| | TOTAL | 3016 | 100.0 | 100.0 | |

These **comparisons** show that the smaller motorcycles account for slightly less than their fair share of rider somatic injuries, and the larger motorcycles account for slightly more than the accident population and the statistical significance is low.

This slight overrepresentation of the larger motorcycles in somatic injury attribution implies that motorcycle size is only a weak indicator of somatic injury severity, and it is likely that other factors will show a more significant association with injury frequency or severity.

An alternative perspective for the evaluation of motorcycle rider somatic injuries is the selection of the **most severe somatic** injury in each of the 900 on-scene, in-depth accident cases. For this sort of evaluation, the rider somatic injury of highest severity (highest **AIS**) is selected for each case and tabulated. Table 8.5.12 shows the body regions for the rider's most severe somatic injuries.

TABLE 8.5.12. RIDER MOST SEVERE SOMATIC INJURY REGION
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| Upper Arm | A | 26 | 3.0 | 3 . c |
| Back | B | 35 | 4.0 | 4.0 |
| Chest | C | 52 | 6.0 | 6.0 |
| Elbow | E | 35 | 4.0 | 4.0 |
| Knee | K | 113 | 13.0 | 13.1 |
| Lower Leg | L | 173 | 20.0 | 20.3 |
| Abdomen | M | 45 | 5.2 | 5.2 |
| Whole Body | O | 2 | 0.2 | 0.2 |
| Pelvic/Hip | P | 57 | 6.6 | 6.6 |
| Ankel/Foot | Q | 36 | 9.9 | 9.9 |
| Forearm | R | 45 | 5.2 | 5.2 |
| Shoulder | s | 46 | 5.3 | 5.3 |
| Thigh | T | 59 | 6.8 | 6.8 |
| Wrist/Hand | W | 89 | 10.3 | 10.3 |
| Upper Extremities | X | 1 | 0.: | 0.1 |
| Trunk | Y | 2 | 0.2 | 0.2 |
| | TOTAL | 866 | 100.0 | 100.0 |

Note that this perspective amplifies the significance of lower leg injuries since they are 20.0% of those most severe somatic injuries. Also, from this tabulation note that the sum of hip, thigh, knee, lower leg, and ankle-foot injuries is 56.4% of those most severe rider somatic injuries.

Also, from the evaluation of those data of Table 8.5.12, it is noted that the riders in 34 (3.8%) of the accidents, incurred no somatic injury.

Table 8.5.13 shows that the most severe rider somatic injuries are essentially symmetrical.

Table 8.5.14 shows the type of lesion for the motorcycle rider most severe somatic injury. As in the previous Table 8.5.7, abrasion injuries are most frequent but fractures plus dislocations are 28.1% of the most severe injuries.

TABLE 5.5.13. SIDE OF MOST SEVERE RIDER SOMATIC INJURY (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|----------|--------------------|------------------------|------------------------|
| Bilateral | B | 72 | 5.3 | 8.3 |
| Central | C | 62 | 7.2 | 7.2 |
| Left | L | 352 | 40.6 | 40.6 |
| Right | R | 380 | 43.9 | 43.9 |
| | TOTAL | 866 | 100.0 | 100.0 |

TABLE 8.5.14. RIDER MOST SEVERE SOMATIC INJURY, LESION TYPE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|----------|--------------------|------------------------|------------------------|
| Abrasion | A | 231 | 26.7 | 26.7 |
| Burn | B | 4 | 0.5 | 0.5 |
| Contusion | C | 155 | 17.9 | 17.9 |
| Dislocation | D | 20 | 2.3 | 2.3 |
| Fracture | F | 223 | 25.8 | 25.8 |
| Swelling | G | 5 | 0.6 | 0.6 |
| Hemorrhage | H | 4 | 0.5 | 0.5 |
| Laceration | L | 33 | 10.2 | 10.2 |
| Amputation | M | 3 | 0.3 | 0.3 |
| Crushing | N | 3 | 0.3 | 0.3 |
| Other | O | 1 | 0.1 | 0.1 |
| Pain | P | 67 | 7.7 | 7.7 |
| Rupture | R | 6 | 0.7 | 0.7 |
| Sprain | S | 45 | 5.2 | 5.2 |
| Unknown | U | 1 | 0.1 | 0.1 |
| Avulsion | V | 10 | 1.2 | 1.2 |
| | TOTAL | 866 | 100.0 | 100.0 |

Table 8.5.15 shows the system-organ involved for the rider **most** severe somatic injuries, and the integument injury dominates with 49.1% of these most severe somatic injuries. Joint and skeletal injuries combine for 37.0% of the **total**.

Table 8.5.16 shows the severity of the rider most severe somatic injury. Of course, **when** the "most severe" injuries are analyzed, the more severe levels become relatively **more** frequent. Compare these data with Table 8.5.9.

TABLE 8.5.15. RIDER **MOST SEVERE SOMATIC INJURY, SYSTEM/ORGAN INVOLVED**
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|
| Arteries | A | 11 | 1.3 | 1.4 |
| Digestive | D | 1 | 0.1 | 0.1 |
| Urogenital | G | 22 | 2.5 | 2.6 |
| Heart | H | 12 | 1.4 | 1.5 |
| Integumentary | I | 405 | 46.8 | 49.1 |
| Joints | J | 83 | 10.2 | 10.7 |
| Kidney | K | 2 | 0.2 | 0.2 |
| Liver | L | 3 | 0.3 | 0.3 |
| Muscles | M | 32 | 3.7 | 3.9 |
| Nervous System | N | 1 | 0.1 | 0.1 |
| Pulmonary/Lungs | P | 5 | 0.6 | 0.6 |
| Spleen | Q | 5 | 0.6 | 0.6 |
| Respiratory | R | 1 | 0.1 | 0.1 |
| Skeletal | S | 210 | 24.2 | 25.4 |
| Unknown | U | 40 | 4.6 | Missing |
| Vertebrae | V | 8 | 0.9 | 0.9 |
| All Systems in Region | W | 20 | 2.3 | 2.4 |
| | TOTAL | 366 | 100.0 | 100.0 |

TABLE 8.5.16. RIDER **MOST SEVERE SOMATIC INJURY SEVERITY**
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|-------|--------------------|------------------------|
| Minor | 1 | 491 | 56.7 |
| Moderate | 2 | 183 | 21.1 |
| Severe | 3 | 107 | 12.4 |
| Serious | 4 | 54 | 6.2 |
| Critical | 5 | 20 | 2.3 |
| Fatal | 6 | 11 | 1.3 |
| | TOTAL | 866 | 100.0 |

Table 8.5.17 provides a crosstabulation of the body region and severity for the rider most severe somatic injury. The outstanding feature is the high frequency of chest injury as the most severe injury for critical and fatal injuries.

Table 8.5.18 (Appendix C.4) provides a crosstabulation of the body region and type of lesion for the rider most severe somatic injuries. Note that **distribution** of the most severe chest injuries with fractures and lacerations predominating. Also, note that abrasions predominate as the **most** severe somatic injury, except for the lower leg and ankle-foot where fractures predominate.

Single vehicle collisions were 230 (25.6%) of the 900 on-scene, in-depth accident cases. Those single vehicle collisions accounted for 685 (22.8%) of the 3004 discrete somatic injuries identifiable in this distinction. The frequency of all somatic injury in single vehicle accidents is not significantly below that of multiple vehicle accidents. Table 8.5.19 shows these data.

There are expected differences in the frequency of somatic injury in single and multiple vehicle collisions. The asterisks added to the data of Table 8.5.19 illustrate the following differences:

(i) There is an outstanding and significantly higher frequency of lower leg injury in multiple vehicle collisions.

(ii) There is a significantly higher frequency of ankle-foot injury in multiple vehicle collisions.

(iii) There are significantly higher forearm and wrist-hand injuries in single vehicle accidents.

Table 8.5.20 shows the rider somatic injury severity for the single and multiple vehicle collisions. The only significant difference is indicated by the asterisk at the level of **AIS:3** for the multiple vehicle collision. This difference between single and multiple vehicle collision somatic injury severity is due to the more frequent severe (**AIS:3**) lower leg injury occurring in the multiple vehicle accident.

Table 8.5.21 (Appendix C.4) shows the body region of injuries to the passengers involved in the 900 on-scene, in-depth accident cases. These passengers suffered 401 discrete injuries to the body (not including head and neck regions).

Table 8.5.22 (Appendix C.4) shows the side of the passenger somatic injuries, and these injuries are essentially symmetrical.

Table 8.5.23 (Appendix C.4) shows the type of lesion for the 401 discrete somatic injuries of passengers.

Table 8.5.24 (Appendix C.4) shows the system or organ involved in the 401 passenger somatic injuries; Table 8.5.25 (Appendix) shows the severity of those injuries.

Table 8.5.26 shows a crosstabulation of somatic injury body region and injury severity for the passengers involved in the 900 on-scene, in-depth cases. Table 8.5.27 provides that equivalent crosstabulation of somatic injury body

TABLE 8.5.17. RIDER SOMATIC REGION BY INJURY SEVERITY, MOST SEVERE INJURY (OSIDs)

| | Count | | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Row Total |
|-------------------|---------|---------|------------|---------------|-------------|--------------|---------------|------------|--------------|
| | Row Pct | Tot Pct | | | | | | | |
| A | 19 | 3 | | | | | | | 26 |
| Upper Arm | 73.1 | 11.5 | 11.5 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | 3.0 |
| | 3.9 | 1.6 | 2.8 | 1.9 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.2 | 0.3 | 0.3 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| B | 29 | 3 | | | | | | | 35 |
| Back | 82.9 | 8.6 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.0 |
| | 5.9 | 1.6 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.4 | 0.3 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| C | 6 | 7 | | | | | | | 52 |
| Chest | 11.5 | 13.5 | 19.2 | 3.8 | 32.7 | 19.2 | 19.2 | 19.2 | 6.0 |
| | 1.2 | 3.8 | 9.3 | 3.7 | 85.0 | 90.9 | 90.9 | 90.9 | |
| | 0.7 | 0.8 | 1.2 | 0.2 | 2.0 | 1.2 | 1.2 | 1.2 | |
| E | 27 | 5 | | | | | | | 35 |
| Elbow | 77.1 | 14.3 | 8.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.0 |
| | 5.5 | 2.7 | 2.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.1 | 0.6 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| K | 80 | 21 | | | | | | | 113 |
| Knee | 70.8 | 18.6 | 8.8 | 1.8 | 0.0 | 0.0 | 0.0 | 0.0 | 13.1 |
| | 16.3 | 11.5 | 9.3 | 3.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 9.2 | 2.4 | 1.2 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| L | 78 | 33 | | | | | | | 173 |
| Lower Leg | 45.1 | 19.1 | 17.3 | 18.5 | 0.0 | 0.0 | 0.0 | 0.0 | 20.0 |
| | 15.9 | 18.0 | 28.0 | 59.3 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 9.0 | 3.8 | 3.5 | 3.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| M | 22 | 11 | | | | | | | 45 |
| Abdomen | 48.9 | 24.4 | 8.9 | 11.1 | 6.7 | 0.0 | 0.0 | 0.0 | 5.2 |
| | 4.5 | 6.0 | 3.7 | 9.3 | 15.0 | 0.0 | 0.0 | 0.0 | |
| | 2.5 | 1.3 | 0.5 | 0.6 | 0.3 | 0.0 | 0.0 | 0.0 | |
| O | 0 | 0 | | | | | | | 1 |
| Whole Body | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 9.1 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| P | 43 | 3 | | | | | | | 57 |
| Pelvic Hip | 75.4 | 5.3 | 15.8 | 3.5 | 0.0 | 0.0 | 0.0 | 0.0 | 6.6 |
| | 8.8 | 1.6 | 8.4 | 3.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 5.0 | 0.3 | 1.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Q | 36 | 39 | | | | | | | 86 |
| Ankle Foot | 41.9 | 45.3 | 11.6 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | 9.9 |
| | 7.3 | 21.3 | 9.3 | 1.9 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.2 | 4.5 | 1.2 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| R | 32 | 4 | | | | | | | 45 |
| Forearm | 71.1 | 8.9 | 6.7 | 13.3 | 0.0 | 0.0 | 0.0 | 0.0 | 5.2 |
| | 6.5 | 2.2 | 2.8 | 11.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.7 | 0.5 | 0.3 | 0.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| S | 23 | 13 | | | | | | | 46 |
| Shoulders | 50.0 | 28.3 | 21.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.3 |
| | 4.7 | 7.1 | 9.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.7 | 1.5 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| T | 31 | 17 | | | | | | | 59 |
| Thigh | 52.5 | 28.8 | 15.3 | 3.4 | 0.0 | 0.0 | 0.0 | 0.0 | 6.8 |
| | 6.3 | 9.3 | 8.4 | 3.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.6 | 2.0 | 1.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| W | 63 | 22 | | | | | | | 89 |
| Wrist-Hand | 70.8 | 24.7 | 3.4 | 1.1 | 0.0 | 0.0 | 0.0 | 0.0 | 10.3 |
| | 12.9 | 12.0 | 2.8 | 1.9 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 7.3 | 2.5 | 0.3 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| X | 0 | 1 | | | | | | | 1 |
| Upper Extremities | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 0.0 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Y | 1 | 1 | | | | | | | 2 |
| Trunk | 50.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.2 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 490 | 183 | 107 | 54 | 20 | 11 | 865 | 100.0 | |
| | 56.6 | 21.2 | 12.4 | 6.2 | 2.3 | 1.3 | | | |

TABLE 8.5.19. RIDER SOMATIC INJURIES, BODY REGION
SINGLE AND MULTIPLE VEHICLE COLLISIONS
(OSIDs)

| Category Label | Code | Single Vehicle | | Multiple Vehicle | | Total |
|-------------------|----------|----------------|------------|------------------|------------|-------|
| | | Frequency | % | Frequency | % | |
| Upper Arm | A | 25 | 3.6 | 73 | 3.1 | 98 |
| Back | B | 22 | 3.2 | 110 | 4.7 | 132 |
| Chest | C | 63 | 9.2 | 144 | 6.2 | 207 |
| Elbow | E | 40 | 5.8 | 127 | 5.5 | 167 |
| Knee | K | 102 | 14.9 | 329 | 14.2 | 431 |
| Lower Leg | L | 56 | 8.2 | 364 * | 15.7 | 420 |
| Abdomen | M | 35 | 5.1 | 179 | 7.7 | 214 |
| Whole Body | 0 | 2 | 0.3 | 3 | 0.1 | 5 |
| Pelvic | P | 44 | 6.4 | 130 | 5.6 | 174 |
| Ankle-Foot | Q | 47 | 6.9 | 209 * | 9.0 | 256 |
| Forearm | R | 59 * | 8.6 | 114 | 4.9 | 173 |
| Shoulder | S | 49 | 7.2 | 112 | 4.8 | 161 |
| Thigh | T | 34 | 5.0 | 176 | 7.6 | 210 |
| Unknown | U | 1 | 0.1 | 3 | 0.1 | 4 |
| Wrist-Hand | W | 103 * | 15.0 | 238 | 10.3 | 341 |
| Upper Ext. | X | 1 | 0.1 | 5 | 0.2 | 6 |
| Trunk | Y | 2 | 0.3 | 3 | 0.1 | 5 |
| | TOTAL | 685 | 100.0 | 2319 | 100.0 | 3004 |

TABLE 8.5.20. RIDER SOMATIC INJURY SEVERITY
SINGLE AND MULTIPLE VEHICLE COLLISIONS
(OSIDs)

| Category Label | Single Vehicle | | Multiple Vehicle | | Total |
|---------------------|----------------|-------|------------------|--------------|-------|
| | Frequency | % | Frequency | % | |
| AIS: 1 Minor | 519 | 75.8 | 1737 | 74.9 | 2256 |
| 2 Moderate | 102 | 14.9 | 280 | 12.1 | 382 |
| 3 Severe | 34 | 5.0 | 180 * | 7.8 | 214 |
| 4 Serious | 18 | 2.6 | 81 | 3.5 | 99 |
| 5 Critical | 10 | 1.5 | 30 | 1.3 | 40 |
| 6 Fatal | 2 | 0.3 | 10 | 0.4 | 12 |
| 8 Unknown | 0 | 0 | 1 | 0.0 | 1 |
| TOTAL | 685 | 100.0 | 2319 | 100.0 | 3004 |

TABLE 8.5.26. PASSENGER SOMATIC INJURY REGION BY INJURY SEVERITY

| | Count | | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Row Total |
|-------------------|---------|---------|------------|---------------|-------------|--------------|---------------|------------|--------------|
| | Row Pct | Tot Pct | | | | | | | |
| A | 11 | | 1 | 1 | 0 | 0 | 0 | 0 | 12 |
| Upper Arm | 91.7 | | 8.3 | 8.3 | 0.0 | 0.0 | 0.0 | 0.0 | 3.0 |
| | 3.4 | | 2.4 | 2.4 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.7 | | 0.2 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| B | 17 | | 1 | 1 | 6 | 0 | 1 | 0 | 25 |
| Back | 68.0 | | 4.0 | 4.0 | 24.0 | 0.0 | 4.0 | 0.0 | 6.2 |
| | 5.2 | | 2.4 | 2.4 | 28.6 | 0.0 | 33.3 | 0.0 | |
| | 4.2 | | 0.2 | 0.2 | 1.5 | 0.0 | 0.2 | 0.0 | |
| C | 12 | | 1 | 1 | 6 | 1 | 0 | 1 | 21 |
| Chest | 57.1 | | 4.8 | 4.8 | 28.6 | 4.8 | 0.0 | 4.8 | 5.2 |
| | 3.7 | | 2.4 | 2.4 | 28.6 | 10.0 | 0.0 | 100.0 | |
| | 3.0 | | 0.2 | 0.2 | 1.5 | 0.2 | 0.0 | 0.2 | |
| E | 22 | | 0 | 0 | 0 | 0 | 0 | 0 | 22 |
| Elbow | 100.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.5 |
| | 6.8 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 5.5 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| K | 47 | | 1 | 1 | 1 | 0 | 0 | 0 | 49 |
| Knee | 95.9 | | 2.0 | 2.0 | 2.0 | 0.0 | 0.0 | 0.0 | 12.2 |
| | 14.5 | | 2.4 | 2.4 | 4.8 | 0.0 | 0.0 | 0.0 | |
| | 11.7 | | 0.2 | 0.2 | 0.2 | 0.0 | 0.0 | 0.0 | |
| L | 44 | | 8 | 8 | 4 | 3 | 0 | 0 | 59 |
| Lower Leg | 74.6 | | 13.6 | 13.6 | 6.8 | 5.1 | 0.0 | 0.0 | 14.7 |
| | 13.6 | | 19.0 | 19.0 | 19.0 | 30.0 | 0.0 | 0.0 | |
| | 11.0 | | 2.0 | 2.0 | 1.0 | 0.7 | 0.0 | 0.0 | |
| M | 12 | | 2 | 2 | 0 | 4 | 1 | 0 | 19 |
| Abdomen | 63.2 | | 10.5 | 10.5 | 0.0 | 21.1 | 5.3 | 0.0 | 4.7 |
| | 3.7 | | 4.8 | 4.8 | 0.0 | 40.0 | 33.3 | 0.0 | |
| | 3.0 | | 0.5 | 0.5 | 0.0 | 1.0 | 0.2 | 0.0 | |
| O | 0 | | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| Whole Body | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.2 |
| | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 33.3 | 0.0 | |
| | 0.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | |
| P | 17 | | 2 | 2 | 0 | 0 | 0 | 0 | 19 |
| Pelvic Hip | 89.5 | | 10.5 | 10.5 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 |
| | 5.2 | | 4.8 | 4.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.2 | | 0.5 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Q | 42 | | 10 | 10 | 1 | 0 | 0 | 0 | 53 |
| Ankle Foot | 79.2 | | 18.9 | 18.9 | 1.9 | 0.0 | 0.0 | 0.0 | 13.2 |
| | 13.0 | | 23.8 | 23.8 | 4.8 | 0.0 | 0.0 | 0.0 | |
| | 10.5 | | 2.5 | 2.5 | 0.2 | 0.0 | 0.0 | 0.0 | |
| R | 23 | | 2 | 2 | 2 | 2 | 0 | 0 | 29 |
| Forearm | 79.3 | | 6.9 | 6.9 | 6.9 | 6.9 | 0.0 | 0.0 | 7.2 |
| | 7.1 | | 4.8 | 4.8 | 9.5 | 20.0 | 0.0 | 0.0 | |
| | 5.7 | | 0.5 | 0.5 | 0.5 | 0.5 | 0.0 | 0.0 | |
| S | 16 | | 5 | 5 | 0 | 0 | 0 | 0 | 21 |
| Shoulders | 76.2 | | 23.8 | 23.8 | 0.0 | 0.0 | 0.0 | 0.0 | 5.2 |
| | 4.9 | | 11.9 | 11.9 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.0 | | 1.2 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| T | 18 | | 4 | 4 | 1 | 0 | 0 | 0 | 23 |
| Thigh | 78.3 | | 17.4 | 17.4 | 4.3 | 0.0 | 0.0 | 0.0 | 5.7 |
| | 5.6 | | 9.5 | 9.5 | 4.8 | 0.0 | 0.0 | 0.0 | |
| | 4.5 | | 1.0 | 1.0 | 0.2 | 0.0 | 0.0 | 0.0 | |
| W | 37 | | 5 | 5 | 0 | 0 | 0 | 0 | 42 |
| Wrist-Hand | 88.1 | | 11.9 | 11.9 | 0.0 | 0.0 | 0.0 | 0.0 | 10.5 |
| | 11.4 | | 11.9 | 11.9 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 9.2 | | 1.2 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| X | 4 | | 0 | 0 | 0 | 0 | 0 | 0 | 4 |
| Upper Extremities | 100.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1.0 |
| | 1.2 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 1.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Y | 1 | | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| Trunk | 100.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.3 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.2 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Z | 1 | | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | 100.0 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.3 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.2 | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 324 | | 42 | 42 | 21 | 10 | 3 | 1 | 401 |
| | 80.8 | | 10.5 | 10.5 | 5.2 | 2.5 | 0.7 | 0.2 | 100.0 |

TABLE 8.5.27. RIDER SOMATIC INJURY REGION BY INJURY SEVERITY

| | Count | | inor 1 | Moderate 2 | evere 3 | Serious 4 | Critical 5 | Fatal 6 | unknown 8 | Row Total |
|-------------------|---------|---------|-----------|---------------|------------|--------------|---------------|------------|--------------|--------------|
| | Row Pct | Col Pct | | | | | | | | |
| A | 75 | 15 | 6 | 2 | 0 | 0 | 0 | 0 | 98 | |
| Upper Arm | 76.5 | 15.3 | 6.1 | 2.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 | |
| | 3.3 | 3.9 | 2.8 | 2.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 2.5 | 0.5 | 0.2 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| B | 112 | 11 | 9 | 0 | 0 | 0 | 0 | 0 | 132 | |
| Back | 84.8 | 8.3 | 6.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.4 | |
| | 5.0 | 2.9 | 4.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.7 | 0.4 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| C | 85 | 22 | 47 | 13 | 28 | 11 | 0 | 0 | 206 | |
| Chest | 41.3 | 10.7 | 22.8 | 6.3 | 13.6 | 5.3 | 0.0 | 0.0 | 6.8 | |
| | 3.8 | 5.7 | 21.8 | 13.1 | 70.0 | 91.7 | 0.0 | 0.0 | | |
| | 2.8 | 0.7 | 1.6 | 0.4 | 0.9 | 0.4 | 0.0 | 0.0 | | |
| E | 158 | 5 | 5 | 0 | 0 | 0 | 0 | 0 | 168 | |
| Elbow | 94.0 | 3.0 | 3.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 | |
| | 7.0 | 1.3 | 2.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 5.2 | 0.2 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| K | 375 | 42 | 13 | 2 | 0 | 0 | 0 | 0 | 432 | |
| Knee | 86.8 | 9.7 | 3.0 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 14.3 | |
| | 16.6 | 10.9 | 6.0 | 2.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 12.4 | 1.4 | 0.4 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| L | 295 | 53 | 41 | 34 | 0 | 0 | 1 | 0 | 424 | |
| Lower Leg | 69.6 | 12.5 | 9.7 | 8.0 | 0.0 | 0.0 | 0.2 | 0.0 | 14.1 | |
| | 13.0 | 13.8 | 19.0 | 34.3 | 0.0 | 0.0 | 100.0 | 0.0 | | |
| | 9.8 | 1.8 | 1.4 | 1.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| M | 136 | 22 | 14 | 33 | 10 | 0 | 0 | 0 | 215 | |
| Abdomen | 63.3 | 10.2 | 6.5 | 15.3 | 4.7 | 0.0 | 0.0 | 0.0 | 7.1 | |
| | 6.0 | 5.7 | 6.5 | 33.3 | 25.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.5 | 0.7 | 0.5 | 1.1 | 0.3 | 0.0 | 0.0 | 0.0 | | |
| O | 2 | 2 | 0 | 0 | 0 | 1 | 0 | 0 | 5 | |
| Whole Body | 40.0 | 40.0 | 0.0 | 0.0 | 0.0 | 20.0 | 0.0 | 0.0 | 0.2 | |
| | 0.1 | 0.5 | 0.0 | 0.0 | 0.0 | 8.3 | 0.0 | 0.0 | | |
| | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| P | 141 | 15 | 16 | 3 | 1 | 0 | 0 | 0 | 176 | |
| Pelvic Hip | 80.1 | 8.5 | 9.1 | 1.7 | 0.6 | 0.0 | 0.0 | 0.0 | 5.8 | |
| | 6.2 | 3.9 | 7.4 | 3.0 | 2.5 | 0.0 | 0.0 | 0.0 | | |
| | 4.7 | 0.5 | 0.5 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Q | 171 | 68 | 16 | 1 | 0 | 0 | 0 | 0 | 256 | |
| Ankle Foot | 66.8 | 26.6 | 6.3 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 8.5 | |
| | 7.6 | 17.7 | 7.4 | 1.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 5.7 | 2.3 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| R | 145 | 14 | 7 | 8 | 0 | 0 | 0 | 0 | 174 | |
| Forearm | 83.3 | 8.0 | 4.0 | 4.6 | 0.0 | 0.0 | 0.0 | 0.0 | 5.8 | |
| | 6.4 | 3.6 | 3.2 | 8.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.8 | 0.5 | 0.2 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| S | 116 | 29 | 16 | 0 | 0 | 0 | 0 | 0 | 161 | |
| Shoulders | 72.0 | 18.0 | 9.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.3 | |
| | 5.1 | 7.6 | 7.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.8 | 1.0 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| T | 159 | 32 | 17 | 2 | 1 | 0 | 0 | 0 | 211 | |
| Thigh | 75.4 | 15.2 | 8.1 | 0.9 | 0.5 | 0.0 | 0.0 | 0.0 | 7.0 | |
| | 7.0 | 8.3 | 7.9 | 2.0 | 2.5 | 0.0 | 0.0 | 0.0 | | |
| | 5.3 | 1.1 | 0.6 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| U | 3 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 4 | |
| Unknown | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| | 0.1 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| W | 281 | 50 | 9 | 1 | 0 | 0 | 0 | 0 | 341 | |
| Wrist-Hand | 82.4 | 14.7 | 2.6 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 11.3 | |
| | 12.4 | 13.0 | 4.2 | 1.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 9.3 | 1.7 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| X | 5 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 6 | |
| Upper Extremities | 83.3 | 16.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.2 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Y | 3 | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 5 | |
| Trunk | 60.0 | 40.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.1 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 2262 | 384 | 216 | 99 | 40 | 12 | 1 | 3014 | | |
| | 75.0 | 12.7 | 7.2 | 3.3 | 1.3 | 0.4 | 0.0 | 100.0 | | |

region and injury severity for **the** motorcycle riders of the 900 on-scene, in-depth accident cases. Of course there are considerable similarities between the passenger and rider somatic injury data, and this is expected because of essentially **equivalent** exposure to injury surfaces. However, the differences outstanding in these data are as follows:

(i) Passengers suffer relatively less frequent ankle-foot and abdominal injury.

(ii) Passengers suffer relatively less frequent lacerations but more abrasions.

(iii) Passengers suffer less frequent urogenital injuries.

These differences are expected in some ways since the motorcycle rider **usu-**ally precedes the passenger into the collision impact area, and the passenger can expect **some** benefit at the expense of the motorcycle rider.

8.6 Head and Neck Injuries

A separate file was prepared and maintained for the head and neck injury data. This separation of head and neck injury data from the somatic injury data was necessary so that special attention could be given to the more complex details typical of head and neck injury. In these data, head **and** neck injury data include face injury data.

One source of head and neck injury data was the 3600 traffic accident report cases. Table 8.6.1 shows the data for motorcycle rider head and neck injuries collected from analysis of the traffic accident report cases. Table 8.6.2 shows the equivalent data collected for the passengers involved in those 3600 traffic accident report cases. These data show a distinction between head and neck and face injury so that the total injury to the head (including face) and neck will be equal to or less than the sum of the two injury data elements. Table 8.6.1 shows that the highest frequency of head (and face) and neck injury for the **accident-**involved motorcycle riders would be 35.8%; Table 8.6.2 shows that the highest frequency of head and neck injury for the accident-involved passengers would be 31.4%.

The head and neck injury data collected for the motorcycle riders in the 900 on-scene, in-depth cases showed a total of 861 discrete injuries to the head and neck regions. The most outstanding feature of these injury data is that those motorcycle riders wearing helmets (39.8% of the accident-involved motorcycle riders) had far less than their fair share of head and neck injuries (22.8%).

Table 8.6.3 shows the region of the head and neck where the 861 injuries were located. A special feature of these injuries is the expected dominance of the forward orientation of the injuries; the sum of frontal, face-general, mandible, nasal, orbit, sphenoid, maxilla, and zygoma regions injuries is 52.0%. The frontal region is the most frequently involved region, and is that region which could be protected by a safety helmet. The regions of face-general, mandible, nasal, orbit, sphenoid, **maxilla** and **zygoma** could be protected only with the forward structure of a full facial coverage safety helmet.

TABLE 8.6.1. MOTORCYCLE RIDER HEAD AND NECK INJURIES
(TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| <u>Head Neck Injury</u> | | | | |
| None | 0. | 2497 | 69.4 | 79.4 |
| Yes | 1. | 649 | 18.0 | 20.6 |
| Unknown-Not Reported | 8. | 454 | 12.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |
| <u>Face Injury</u> | | | | |
| None | 0. | 2657 | 73.8 | 84.8 |
| Yes | 1. | 477 | 13.2 | 15.2 |
| Unknown-Not Reported | 8. | 466 | 12.9 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 8.6.2. MOTORCYCLE PASSENGER HEAD AND NECK INJURIES
(TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------------------|-------|--------------------|------------------------|------------------------|
| <u>MC Passenger Head/Neck Injury</u> | | | | |
| None | 0. | 361 | 10.0 | 77.6 |
| Yes | 1. | 104 | 2.9 | 22.4 |
| Unknown-Not Reported | a. | 91 | 2.5 | Missing |
| N.A.-No Passenger | 9. | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |
| <u>MC Passenger Face Injury</u> | | | | |
| None | 0. | 423 | 11.7 | 91.0 |
| Yes | 1. | 42 | 1.2 | 9.0 |
| Unknown-Not Reported | a. | 91 | 2.5 | Missing |
| N.A.-No Passenger | 9. | 3044 | 84.6 | Missing |
| | TOTAL | 3600 | 100.0 | 100.0 |

TABLE 8.6.3. RIDER HEAD AND NECK INJURY REGION
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|--------------|--------------------|------------------------|------------------------|
| <u>Head-Neck Region</u> | | | | |
| Basal | B | 39 | 4.5 | 4.5 |
| Cervical-General | C | 81 | 9.4 | 9.4 |
| Frontal | F | 119 | 13.8 | 13.8 |
| Foramen Magnum | H | 1 | 0.1 | 0.1 |
| Face-General | K | 48 | 5.6 | 5.6 |
| Mandible | M | 99 | 11.5 | 11.5 |
| Nasal | N | 49 | 5.7 | 5.7 |
| Occipital | O | 51 | 5.9 | 5.9 |
| Parietal | P | 61 | 7.1 | 7.1 |
| Brain-General | Q | 103 | 12.0 | 12.0 |
| Orbit | R | 48 | 5.6 | 5.6 |
| Sphenoid | S | 1 | 0.1 | 0.1 |
| Temporal | T | 44 | 5.1 | 5.1 |
| Unknown | U | 8 | 0.9 | 0.9 |
| Whole Region | W | 4 | 0.5 | 0.5 |
| Maxilla | X | 40 | 4.6 | 4.7 |
| Throat | Y | 6 | 0.7 | 0.7 |
| Zygoma | Z | 43 | 5.0 | 5.0 |
| Cervical Vertebra | 1 | 8 | 0.9 | 0.9 |
| Cervical Vertebra | 2 | 2 | 0.2 | 0.2 |
| Cervical Vertebra | 5 | 2 | 0.2 | 0.2 |
| Cervical Vertebra | 6 | 2 | 0.2 | 0.2 |
| Cervical Vertebra | 7 | 1 | 0.1 | 0.1 |
| None-N.A. | 0 | 1 | 0.1 | Missing |
| | TOTAL | 861 | 100.0 | 100.0 |

Table 8.6.4 shows the side of the motorcycle rider head and neck injury for the 900 on-scene, in-depth accident cases. These data show that the injuries are essentially symmetrical and there is no significant tendency to right or left side injury.

Table 8.6.5 shows the type of lesion for the motorcycle rider head and neck injury for the 900 accident cases. Note that lacerations (23.9%) are most frequent, followed by abrasions (18.4%) fractures (15.7%) and concussions (10.3%).

Table 8.6.6 shows the system-organ involved in the 861 motorcycle rider head and neck injuries. Note that the integumentary injuries, such as lacerations, abrasions, and contusions of the skin of the head and neck, dominate as 55.7% of those 861 injuries. This fact clearly exposes the prospect of protection by the use of a safety helmet. Any qualified safety helmet could attenuate or prevent lacerations and abrasions of the covered regions. This sort of protection would represent the minimum capability of any contemporary safety helmet.

TABLE 8.6.4. RIDER HEAD AND NECK INJURY SIDE
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|----------|--------------------|------------------------|------------------------|
| Side | | | | |
| Bilateral | B | 251 | 29.2 | 30.3 |
| Central | C | 131 | 15.2 | 15.8 |
| Left | L | 212 | 24.6 | 25.5 |
| | M | 1 | 0.1 | 0.1 |
| Right | R | 236 | 27.4 | 28.4 |
| Unknown | U | 30 | 3.5 | 0.0 |
| | TOTAL | 861 | 100.0 | 100.0 |

TABLE 8.6.5. RIDER HEAD AND NECK INJURY - TYPE OF LESION
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|----------|--------------------|------------------------|------------------------|
| <u>Lesion</u> | | | | |
| Abrasion | A | 158 | 18.4 | 18.4 |
| Burn | B | 2 | 0.2 | 0.2 |
| Contusion | C | 4 | 9.8 | 9.3 |
| Dislocation | D | 2 | 0.2 | 0.2 |
| Fracture | F | 135 | 15.7 | 15.7 |
| Swelling | G | 4 | 0.5 | 0.5 |
| Hemorrhage | H | 38 | 4.4 | 4.4 |
| Hematoma | J | 44 | 5.1 | 5.1 |
| Concussion | K | 89 | 10.3 | 10.3 |
| Laceration | L | 206 | 23.9 | 23.9 |
| Amputation | M | 2 | 0.2 | 0.2 |
| Crushing | N | 3 | 0.3 | 0.3 |
| Other | O | 1 | 0.1 | 0.1 |
| Pain | P | 61 | 7.1 | 7.1 |
| Maceration | Q | 4 | 0.5 | 0.5 |
| Rupture | R | 4 | 0.5 | 0.5 |
| Sprain | S | 10 | 1.2 | 1.2 |
| Herniation | T | 1 | 0.1 | 0.1 |
| Unknown | U | 1 | 0.1 | 0.0 |
| Avulsion | V | 12 | 1.4 | 1.4 |
| | TOTAL | 861 | 100.0 | 100.0 |

TABLE 8.6.6. RIDER HEAD AND NECK INJURIES - SYSTEM/ORGAN INVOLVED
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|--------------|--------------------|------------------------|------------------------|
| Arteries | A | 4 | 0.5 | 0.5 |
| Pans-Medulla | B | 12 | 1.4 | 1.5 |
| Cerebellum | C | 6 | 0.7 | 0.7 |
| Dural-Extradural | D | 7 | 0.8 | 0.8 |
| Integumentary | I | 452 | 52.5 | 55.7 |
| Joints | J | 4 | 0.5 | 0.5 |
| Auditory Apparatus | K | 1 | 0.1 | 0.1 |
| Larynx-Trachea-Esophagus | L | 1 | 0.1 | 0.1 |
| Muscles | M | 24 | 2.8 | 3.0 |
| Neural Tissues | N | 112 | 13.0 | 13.8 |
| Oral Soft Tissues | O | 12 | 1.4 | 1.5 |
| Piarchnoid-Subdural | P | 19 | 2.2 | 2.3 |
| Spinal Cord | Q | 1 | 0.1 | 0.1 |
| Skeletal | S | 120 | 13.9 | 14.8 |
| Teeth | T | 18 | 2.1 | 2.2 |
| Unknown | U | 50 | 5.8 | Missing |
| Vertebra | V | 1 | 0.1 | 0.1 |
| All Systems in Region | W | 13 | 1.5 | 1.6 |
| Eye | Y | 1 | 0.1 | 0.1 |
| Subcortical Structure | Z | 3 | 0.3 | 0.3 |
| | TOTAL | 861 | 100.0 | 100.0 |

While there were 48 injuries in the region of the orbit (Table 8.6.3), there was only 1 injury to the eye itself. Consequently, these data relate no significant requirement for physical protection of the eye! The use of glasses, goggles and face shields is most essential in the protection from wind blast to preserve vision; the mechanical protection from collision injury is not a significant factor.

Injuries to the central nervous system accounted for 18.5% of all the head and neck injuries, and architectural injuries accounted for 14.5%. Of course, these are the injuries of greater severity and can be reduced or prevented only by location of an energy absorbing medium at the impact site.

Table 8.6.7 shows the severity of the 861 head and neck injuries. The critical and fatal injuries were 8.4% of the total, indicating the vulnerability of the head and neck compared to the somatic regions.

Table 8.6.8 shows a crosstabulation of head and neck region and injury severity for the 861 rider injuries. The injuries to areas that are closely associated with the central nervous system indicate the far greater contribution to the serious critical and fatal injuries. On the other hand, the injuries to areas that are remote to the central nervous system have an insignificant contribution to those serious, critical and fatal head and neck injuries. For example, note the high frequency of critical and fatal injury at the first cervical vertebrae (C1)

TABLE 8.6.7. RIDER HEAD AND NECK INJURY SEVERITY (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Minor | 1 | 572 | 66.4 | 66.4 | 66.4 |
| Moderate | 2 | 112 | 13.0 | 13.0 | 79.4 |
| Severe | 3 | 74 | 8.6 | 8.6 | 88.0 |
| Serious | 4 | 30 | 3.5 | 3.5 | 91.5 |
| Critical | 5 | 49 | 5.7 | 5.7 | 97.2 |
| Fatal | 6 | 23 | 2.7 | 2.7 | 99.9 |
| Unknown | a | 1 | 0.1 | 0.1 | 100.0 |
| | TOTAL | 861 | 100.0 | 100.0 | |

but no contribution at the other locations (C2, C5, C6 and C7). Also note that the basal, occipital, temporal, **parietal**, frontal and brain-general regions have high frequency of serious, critical and fatal injury because those areas are within or immediately adjacent to the extremely vulnerable central nervous system. The injuries to the face-general, mandible, nasal, maxilla, **zygoma** and orbit show ZERO contribution to serious, critical and fatal injuries. In words, the plastic surgeon can provide repair to non-lethal facial injuries but the neurosurgeon can only limit the life-threatening injuries to **the** central nervous system.

In actuality, there is a deadly Interaction between the recorded non-lethal facial injuries and the life-threatening injuries to the central nervous system. If the motorcycle rider suffers a severe impact to the point of the jaw, the result could be a displaced fracture of the mandible (AIS:3). In addition, and remote from the point of impact, the transmission of force through the mandible could produce a displaced basal skull fracture with laceration of the base of the brain (AIS:5) or brain **stem** contusion (AIS:5).

Additional perspective of motorcycle rider head and neck injury can be obtained by examination of the most severe head and neck injury in each accident. Table 8.6.9 shows the most severe head and neck injury for the motorcycle riders in the 900 on-scene, in-depth accident cases. In 508 cases, the motorcycle rider did not have any head or neck injury, the extreme of which is shown in Table 8.6.9. Here the most frequent, most severe injury is that region of the brain-general, 19.1%, and the second most frequent is the frontal region. Of course both regions could be protected by a qualified safety helmet.

Table 8.6.10 shows the side of the most severe head and neck injury. In these data the most severe injuries are not symmetrical, and there is a significant excess of right side injuries. The cause of this asymmetry of data is unknown, and explanation is not readily available from review of these data.

Table 8.6.11 shows the type of lesion for that most severe head and neck injury. In these data, the lacerations still are the dominant injury but concussion is now the second ranking injury in this perspective of injuries.

TABLE 8.6.8. RIDER HEAD AND NECK INJURY REGION BY SEVERITY

| | Count | | | | | | | Row total |
|-------------------------|------------|------------|---------------|-------------|--------------|---------------|------------|--------------|
| | Row Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | |
| | Col Pct | | | | | | | |
| | Tot Pct | | | | | | | |
| B | 0 | 0 | 22 | 6 | 8 | 3 | 0 | 39 |
| Nasal | 0.0 | 0.0 | 56.4 | 15.4 | 20.5 | 7.7 | 0.0 | 4.5 |
| | 0.0 | 0.0 | 29.7 | 20.0 | 16.7 | 13.0 | 0.0 | |
| | 0.0 | 0.0 | 2.6 | 0.7 | 0.9 | 0.3 | 0.0 | |
| C | 73 | 2 | 2 | 0 | 2 | 2 | 0 | 81 |
| Cervical-General | 90.1 | 2.5 | 2.5 | 0.0 | 2.5 | 2.5 | 0.0 | 9.4 |
| | 12.8 | 1.8 | 2.7 | 0.0 | 4.2 | 8.7 | 0.0 | |
| | 8.5 | 0.2 | 0.2 | 0.0 | 0.2 | 0.2 | 0.0 | |
| F | 102 | 5 | 0 | 5 | 3 | 4 | 0 | 119 |
| Frontal | 85.7 | 4.2 | 0.0 | 4.2 | 2.5 | 3.4 | 0.0 | 13.8 |
| | 17.8 | 4.5 | 0.0 | 16.7 | 6.3 | 17.4 | 0.0 | |
| | 11.9 | 0.6 | 0.0 | 0.6 | 0.3 | 0.5 | 0.0 | |
| H | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| Foramen Magnum | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 00.0 | 0.0 | 0.1 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.3 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | |
| K | 46 | 2 | 0 | 0 | 0 | 0 | 0 | 48 |
| Face-General | 95.8 | 4.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 |
| | 8.0 | 1.8 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.3 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| M | 78 | 17 | 4 | 0 | 0 | 0 | 0 | 99 |
| Mandible | 78.8 | 17.2 | 4.0 | 0.0 | 0.0 | 0.0 | 0.0 | 11.5 |
| | 13.6 | 13.2 | 5.4 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 9.1 | 2.0 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | |
| N | 40 | 9 | 0 | 0 | 0 | 0 | 0 | 49 |
| Nasal | 81.6 | 18.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.7 |
| | 7.0 | 8.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.7 | 1.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| O | 28 | 5 | 9 | 1 | 8 | 0 | 0 | 51 |
| Occipital | 54.9 | 9.8 | 17.6 | 2.0 | 15.7 | 0.0 | 0.0 | 5.9 |
| | 4.9 | 4.5 | 12.2 | 3.3 | 16.7 | 0.0 | 0.0 | |
| | 3.3 | 0.6 | 1.0 | 0.1 | 0.9 | 0.0 | 0.0 | |
| P | 27 | 14 | 8 | 5 | 5 | 2 | 0 | 61 |
| Parietal | 44.3 | 23.0 | 13.1 | 8.2 | 8.2 | 3.3 | 0.0 | 7.1 |
| | 4.7 | 12.5 | 10.8 | 16.7 | 10.4 | 6.7 | 0.0 | |
| | 3.1 | 1.6 | 0.9 | 0.6 | 0.6 | 0.2 | 0.0 | |
| Q | 31 | 35 | 12 | 4 | 17 | 4 | 0 | 103 |
| Brain-General | 30.1 | 34.0 | 11.7 | 3.9 | 16.5 | 3.4 | 0.0 | 12.0 |
| | 5.4 | 31.3 | 16.2 | 13.3 | 35.4 | 17.4 | 0.0 | |
| | 3.6 | 4.1 | 1.4 | 0.5 | 2.0 | 0.5 | 0.0 | |
| R | 40 | 3 | 5 | 0 | 0 | 0 | 0 | 48 |
| Orbit | 83.3 | 6.3 | 10.4 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 |
| | 7.0 | 2.7 | 6.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.7 | 0.3 | 0.6 | 0.0 | 0.0 | 0.0 | 0.0 | |
| S | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 |
| Sphenoid | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 0.0 | 0.0 | 0.0 | 3.3 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | |
| Column Total | 572 | 112 | 74 | 30 | 48 | 23 | 1 | 860 |
| | 66.5 | 13.0 | 8.6 | 3.5 | 5.6 | 2.7 | 0.1 | 100.0 |

Continued

TABLE 8.6.8 (continued)

| | Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Unknown 8 | Row Total |
|-------------------|--|-------------|---------------|-------------|--------------|---------------|------------|--------------|--------------|
| T | 27 | 5 | 4 | 4 | 3 | 1 | 0 | 44 | |
| Temporal | 61.4 | 11.4 | 9.1 | 9.1 | 6.8 | 2.3 | 0.0 | 5.1 | |
| | 4.7 | 4.5 | 5.4 | 13.3 | 6.3 | 4.3 | 0.0 | | |
| | 3.1 | 0.6 | 0.5 | 0.5 | 0.3 | 0.1 | 0.0 | | |
| U | 4 | 1 | 0 | 2 | 0 | 0 | 1 | 8 | |
| Unknown | 50.0 | 12.5 | 0.0 | 25.0 | 0.0 | 0.0 | 12.5 | 0.9 | |
| | 0.7 | 0.9 | 0.0 | 6.7 | 0.0 | 0.0 | 100.0 | | |
| | 0.5 | 0.1 | 0.0 | 0.2 | 0.0 | 0.0 | 0.1 | | |
| W | 2 | 0 | 0 | 1 | 0 | 1 | 0 | 4 | |
| Whole Region | 50.0 | 0.0 | 0.0 | 25.0 | 0.0 | 25.0 | 0.0 | 0.5 | |
| | 0.3 | 0.0 | 0.0 | 3.3 | 0.0 | 4.3 | 0.0 | | |
| | 0.2 | 0.0 | 0.0 | 0.1 | 0.0 | 0.1 | 0.0 | | |
| X | 32 | 8 | 0 | 0 | 0 | 0 | 0 | 40 | |
| Maxilla | 80.0 | 20.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.7 | |
| | 5.6 | 7.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.7 | 0.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Y | 2 | 2 | 1 | 1 | 0 | 0 | 0 | 6 | |
| Throat | 33.3 | 33.3 | 16.7 | 16.7 | 0.0 | 0.0 | 0.0 | 0.7 | |
| | 0.3 | 1.8 | 1.4 | 3.3 | 0.0 | 0.0 | 0.0 | | |
| | 0.2 | 0.2 | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | | |
| Zygoma | 39 | 4 | 0 | 0 | 0 | 0 | 0 | 43 | |
| | 90.7 | 9.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | |
| | 6.8 | 3.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.5 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 1 | 0 | 0 | 1 | 0 | 2 | 5 | 0 | 8 | |
| Cervical Vertebra | 0.0 | 0.0 | 12.5 | 0.0 | 25.0 | 62.5 | 0.0 | 0.9 | |
| | 0.0 | 0.0 | 1.4 | 0.0 | 4.2 | 21.7 | 0.0 | | |
| | 0.0 | 0.0 | 0.1 | 0.0 | 0.2 | 0.6 | 0.0 | | |
| 2 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 2 | |
| Cervical Vertebra | 50.0 | 0.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.2 | 0.0 | 1.4 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 5 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.0 | 0.0 | 2.7 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 6 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.0 | 0.0 | 2.7 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 7 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| | 0.0 | 0.0 | 1.4 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 572 66.5 | 112 13.0 | 74 8.6 | 30 3.5 | 48 5.6 | 23 2.7 | 1 0.1 | 860 00.0 | |

TABLE 8.6.9. RIDER MOST SEVERE HEAD AND NECK INJURY REGION
(OSIDs)

| category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|-------|--------------------|------------------------|------------------------|
| Basal | B | 8 | 0.9 | 2.1 |
| Cervical-Genera: | C | 36 | 4.0 | 9.3 |
| Frontal | F | 66 | 7.3 | 17.1 |
| Foramen Magnum | H | 1 | 0.1 | 0.3 |
| Face-General | K | 11 | 1.2 | 2.8 |
| Mandible | M | 40 | 4.4 | 10.3 |
| Nasal | N | 27 | 3.0 | 7.0 |
| Occipital | O | 24 | 2.7 | 6.2 |
| Parietal | P | 31 | 3.4 | 8.0 |
| Brain-General | Q | 74 | 8.2 | 19.1 |
| Orbit | R | 18 | 2.0 | 4.7 |
| Temporal | T | 22 | 2.4 | 5.7 |
| Whole Region | w. | 1 | 0.1 | 0.3 |
| Maxilla | X | 6 | 0.7 | 1.6 |
| Zygoma | Z | 14 | 1.6 | 3.6 |
| Cervical Vertebra | 1 | 6 | 0.7 | 1.6 |
| Cervical Vertebra | 2 | 1 | 0.1 | 0.3 |
| Cervical Vertebra | 6 | 1 | 0.1 | 0.3 |
| Unknown | U | 5 | 0.6 | Missing |
| None-N.A. | 0 | 5 0 8 | 56.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.6.10. RIDER MOST SEVERE HEAD AND NECK INJURY SIDE
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Bilateral | B | 124 | 13.8 | 32.9 |
| Central | C | 58 | 6.4 | 15.4 |
| Left | L | 78 | 8.7 | 20.7 |
| Midline | M | 1 | 0.1 | 0.3 |
| Right | R | 116 | 12.9 | 30.8 |
| Unknown | U | 15 | 1.7 | Missing |
| None-N.A. | O | 508 | 56.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.6.11. RIDER MOST SEVERE HEAD AND NECK INJURY -
TYPE OF LESION
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|----------|--------------------|------------------------|------------------------|
| Abrasion | A | 66 | 7.3 | 16.9 |
| Burn | B | 1 | 0.1 | 0.3 |
| Contusion | C | 27 | 3.0 | 6.9 |
| Fracture | F | 40 | 4.4 | 10.2 |
| Hemorrhage | H | 17 | 1.9 | 4.3 |
| Hematoma | J | 26 | 2.9 | 6.6 |
| Concussion | K | 67 | 7.4 | 17.1 |
| Laceration | L | 95 | 10.6 | 24.3 |
| Amputation | M | 1 | 0.1 | 0.3 |
| Crushing | N | 2 | 0.2 | 0.5 |
| Other | O | 1 | 0.1 | 0.3 |
| Pain | P | 34 | 3.8 | 8.7 |
| Maceration | Q | 3 | 0.3 | 0.8 |
| Rupture | R | 1 | 0.1 | 0.3 |
| sprain | S | 3 | 0.3 | 0.8 |
| Herniation | T | 1 | 0.1 | 0.3 |
| Avulsion | V | 6 | 0.7 | 1.5 |
| Unknown | U | 1 | 0.1 | Missing |
| None-N.A. | O | 508 | 56.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 8.6.12 shows the system/organ involved in those 492 cases with most severe head and neck injury. **Integumentary** injuries still dominate as 55.4% of those 492 most severe injuries.

Table 8.6.13 shows the severity of the most **severe** head and neck injuries. Here the critical and fatal injuries are 5.4% of the total of most severe head and neck injuries.

The passengers involved in the 900 on-scene, in-depth accident **cases** received a total of 136 discrete head and neck injuries. The helmet use for the accident involved passengers was far below that of the motorcycle riders. 39.6% of the riders wore helmets but only 9.6% of the passengers wore helmets. Also passengers were present in 17.1% of the accidents but their injury frequency was 15.8%. In many accident configurations the passenger is somewhat protected by the rider, and the rider tends to absorb some of those frontal impacts.

Table 8.6.14 (Appendix C.4) shows the head and neck region of the 136 injuries to the passengers. Approximately half of these injuries have the forward orientation of frontal impact. Table 8.6.15 (Appendix C.4) shows the passenger head and neck **injuries** to be approximately symmetrical. Table 8.6.16 (Appendix C.4) shows the type of lesion for the passenger head and neck injuries, and abrasions are most frequent. Table 8.6.17 (Appendix C.4) shows the system-organ involved for the

TABLE 8.6.12. RIDER MOST SEVERE HEAD AND NECK INJURY -
SYSTEM/ORGAN
(OSIDs)

| category Level | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|----------|--------------------|------------------------|------------------------|
| Arteries | A | 1 | 0.1 | 0.3 |
| Pans-Medulla | B | 7 | 0.8 | 1.9 |
| Cerebellum | C | 2 | 0.2 | 0.6 |
| Dural-Extradural | D | 2 | 0.2 | 0.6 |
| Integumentary | I | 200 | 22.2 | 55.4 |
| Joints | J | 1 | 0.1 | 0.3 |
| Auditory Apparatus | K | 1 | 0.1 | 0.3 |
| Muscles | M | 9 | 1.0 | 2.5 |
| Neural Tissues | N | 79 | 8.8 | 21.9 |
| Oral Soft Tissues | O | 3 | 0.3 | 0.8 |
| Piarachnoid-Subdural | P | 11 | 1.2 | 3.0 |
| Skeletal | S | 36 | 4.0 | 10.0 |
| Teeth | T | 2 | 0.2 | 0.6 |
| All Systems in Region | W | 6 | 0.7 | 1.7 |
| Subcortical Structure | Z | 1 | 0.1 | 0.3 |
| Unknown | U | 31 | 3.4 | Missing |
| None | 0 | 508 | 56.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 8.6.13. RIDER MOST SEVERE HEAD AND NECK INJURY SEVERITY
(OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| None | 0 | 508 | 56.4 | 56.5 | 56.5 |
| Minor | 1 | 256 | 28.4 | 28.5 | 85.0 |
| Moderate | 2 | 59 | 6.6 | 6.6 | 91.5 |
| Severe | 3 | 18 | 2.0 | 2.0 | 93.5 |
| Serious | 4 | 9 | 1.0 | 1.0 | 94.5 |
| Critical | 5 | 29 | 3.2 | 3.2 | 97.8 |
| Fatal | 6 | 20 | 2.2 | 2.2 | 100.0 |
| Unknown | 8 | 1 | 0.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

passenger head and neck injuries, and integument injuries dominate with 57.5%. Table 8.6.18 (Appendix C.4) provides a crosstabulation of passenger head and neck injury region and injury severity. The characteristics are generally similar to the rider head and neck injury severity patterns.

8.7 Injury Mechanisms

The most important factors in the mechanism of injury are the contact surfaces, which were identified in the analysis of the discrete injuries for the 900 on-scene, in-depth accident cases. For example, an automobile turns left in front of the oncoming motorcycle and the rider's lower left leg is trapped in impact between the automobile front bumper and the motorcycle engine-transmission cases. The resulting injury to the left lower leg would be analyzed and described for data purposes by body region, side, aspect, lesion, and severity. Also, the contact surfaces which are responsible for that injury are described for data purposes, e.g. the car front bumper (**CF01**) and the motorcycle engine-transmission cases (**MC22**) so that the injury mechanism is thus defined. In this way it is possible for one, or two, surfaces to be associated with each discrete injury. In the analysis of the 3016 motorcycle rider somatic injuries, 5067 contact surfaces were identified; in the analysis of the 861 motorcycle rider head and neck injuries, 1290 contact surfaces were identified.

Table 8.7.1 (Appendix C.4) shows the codes used to identify the contact surfaces of the vehicles and environment.

Table 8.7.2 (Appendix C.4) shows the frequency of the various contact codes related to the 5067 contact surfaces causing the motorcycle rider somatic injuries. These tables list the following data:

| | |
|-----------------|-----------------------|
| Motorcycles: | 1961 contact surfaces |
| Other Vehicles: | 1421 contact surfaces |
| Autos: | 1265 contact surfaces |
| Pickup Trucks: | 70 contact surfaces |
| Large Trucks: | 48 contact surfaces |
| Buses: | 1 contact surface |
| Vans: | 37 contact surfaces |
| Environment: | 1668 contact surfaces |
| Unknown | 17 contact surfaces |
| TOTAL | 5067 contact surfaces |

Table 8.7.2a shows the 1961 motorcycle contact surfaces related to the rider somatic injuries. It should be noted here that these surfaces identified as injury agents are not necessarily dangerous or wicked surfaces. In great part, the participating surfaces were present simply as the surface adjacent to the injured area. In other words, a nice smooth gas tank is a relatively "friendly" surface until it impacts the genitals in a crash. However, **ag**as tank with sharp corners and edges or a protruding flip-up type tank cap can cause injuries far more serious than any smooth, compliant surface. But in any case, it will be likely that the gas tank can participate as an injury contact surface. Table 8.7.2a shows that the gas tank (**MC02**) acted as an injury surface 321 times, 6.3% of the rider somatic injuries. In most of these cases the smooth surface did **not** aggravate the injuries beyond the expected contusions, abrasions, etc. In a few cases the protruding gas tank cap

exaggerated the injury, **especially** if the forward-hinged, flip-up type tank cap opened to provide a sharp lacerating surface and also spill fuel.

A **soft** metal tank side is relatively friendly to the knees of a **motorcycle** rider. In many instances, the participation of the fuel tank in knee injury was favorable, with the tank thereby denting and absorbing **some part** of knee **impact** from another outside surface. In general, the smooth metal gas tank with recessed **tank cap** did not participate in the exaggeration of rider somatic injuries.

The motorcycle handlebars acted as the most frequent motorcycle injury agent, 869 times or **17.2%** of the rider somatic injuries. The dynamics of most motorcycle accident configurations make it very likely that the handlebars will participate **as** an injury contact surface. Sometimes this participation is at a low level, as in thigh contusions as the rider vaults forward in a frontal impact; some rare times this participation is at a high level when the handlebar end pierces the chest. There is a real contrast between the requirement for the control **function** and the crashworthiness of handlebars. Accurate and precise control requires rigid handlebars, but crashworthiness favors flexible or movable handlebars. Ideally, the handlebars are stiff and rigid for control operations but upon crash impact the handlebars should fold, rotate, bend, flex or twist to reduce injury contribution. In general, the shorter, more rigid handlebars, e.g., drag bars, contributed more in injury causation when they were so involved. The more flexible handlebars, e.g., six-bend high-rise pullbacks, contributed notably less in injury causation when they were so involved. The high-rise handlebars were then **more** likely to rotate in the clamps and provide less resistance when impact forces were applied in a-crash.

The windshield (**MC07**) and the fairing (**MC17**) participated as somatic injury contact surfaces 73 times. It was extremely rare that the fairing or windshield was an active agent of injury. In most cases the fairing or windshield acted simply as a replacement surface, i.e., the motorcycle rider hits the windshield which is against the side of the involved automobile.

Motorcycle mirrors (**MC09**) acted as injury agents 47 times, and were outstanding only when sharp edges or posts were exposed and clamp-on accessories.

The rear suspension (**MC12**) participated as an injury surface 90 times, **primarily** by the rear shock absorber-spring set acting as the inside surface contacting the knee, lower leg, or ankle-foot. The turn signals (**MC21**) were the injury agents 37 times in the same way by the protrusion of the rear turn signals on rigid stalks or mounting brackets. The more modern flexible stalk mountings were seen during several accident investigations but there was no instance of injury contribution of that flexible mounting and that design configuration seems very crashworthy.

The motorcycle engine-transmission cases (**MC22**) acted as the injury contact surface 256 times. In general, this contact surface was one of two surfaces producing injury to the lower leg and ankle-foot. For examples, in an angle collision the rider's ankle-foot and lower leg would be trapped in contact between the automobile rear corner and the motorcycle engine-transmission side, or in a slide-out and fall the rider's ankle-foot and lower leg would be trapped in contact between the pavement and the motorcycle engine-transmission side. A notable exception

where the motorcycle engine-transmission did not participate in such injury was the engine configuration with horizontally opposed cylinders, e.g. BMW (see section 6.12, Crash Bar Effectiveness).

Motorcycle batteries did not contribute as injury agents: only the sharp edges of the battery side cover participated as an injury agent in 3 instances.

Table 8.7.2b shows the automobile contact surfaces related to the motorcycle somatic injuries. The front surfaces and front sides of the cars forward of the front wheel account for half of the somatic injury contact surfaces. The rear and rear corners of the automobile account for 11.4% of the somatic injuries.

Table 8.7.2c shows the rider somatic injury contact surfaces for the pickup, truck, bus and van involvement.

Table 8.7.2d shows the rider somatic injury contact surfaces contributed by the environment. Note that the pavement (EA01, EC01) contributes 1384 or 82.9% of the total injury surfaces from the environment.

Table 8.7.3 (Appendix C.4) shows the cross-tabulation of the contact surface with the body region of the rider somatic injuries. The application of these data explains the function of the contact surfaces in generating the region injury. For example, the car front bumper (CF01) is specially associated with injuries to the lower leg and ankle-foot, 100 of the 139 contact surfaces are with those body regions and the results were usually severe. Note that the gas tank, MC02, has the highest association with those body regions close to it; the knee (75), thigh (52), and abdomen (115) associate most frequently, and the abdomen is entirely that inferior aspect involving urogenital injury.

Table 8.7.4 (Appendix C.4) shows the cross-tabulation of the contact surface with the injury severity for the rider somatic injuries. The application of these data explains the function of the contact surfaces in generating severe injury. The essential facts presented here are that rigid, sharp surfaces do in fact generate the more severe injuries. A special perspective is available by examining the contact surfaces most frequently involved at AIS \geq 3, i.e. severe, serious, critical and fatal injuries. The following data illustrate that involvement for some identifiable rigid surfaces:

| <u>contact Surface</u> | <u>AIS \geq 3</u> |
|---|--------------------------------|
| Front Bumper (CF01, PF01, VF01) | 41 |
| Front Corner (CF03, CS03, etc.) | 68 |
| Pavement, Curb (EA01, EC01, EC06) | 55 |
| Trees, Poles, Barriers, Guardrails (EW02, EW04, EM02, EM04) | 59 |
| Motorcycle Rigid Metal Parts (MC02, MC03, MC05, MC06, MC07, MC12, MC20, MC22) | 207 |
| TOTAL | 430 |

These data show that the participation of the motorcycle rigid surfaces is approximately half of the total, and the other vehicles and environment contribute their half. In other words, the two agents participating in the accident process seem to contribute their approximate share of the more severe rider somatic injuries.

Table 8.7.5 (Appendix C.4) shows the frequency of the various contact codes related to the 1290 contact surfaces causing the rider head and neck injuries. These tables list the following data:

| | |
|-----------------|----------------------------|
| Motorcycles: | 91 contact surfaces |
| Other Vehicles: | 471 contact surfaces |
| Autos: | 403 contact surfaces |
| Pickups: | 29 contact surfaces |
| Trucks: | 19 contact surfaces |
| Buses: | 2 contact surfaces |
| Vans: | 18 contact surfaces |
| Environment: | 721 contact surfaces |
| Others, Unknown | <u>7 contact surfaces</u> |
| TOTAL | 1290 contact surfaces |

Table 8.7.5a shows the 91 motorcycle contact surfaces related to the rider head and neck injuries. Note that the windshield (MC07) and fairing (MC17) participated as head and neck injury surfaces a total of 24 times, and the participation **was** essentially identical to that of the somatic injuries. **It was** extremely rare that the windshield or fairing was an active agent of injury, the surface acted mostly as a replacement for the **participating** other vehicle or environment. The handlebars (MC05) were the most frequent surface of the motorcycle acting as an agent of injury to the rider head and neck.

There are four cases noted where the motorcycle safety helmet (MC38) participated as the injury surface. All four cases involved only minor, "Band-aid" type injuries to the **nose (2)**, jaw (1) and neck (**1**) when a severe impact occurred at some other location on the helmet.

Table 8.7.5b shows the 403 automobile contact surfaces related to the rider head and neck injuries. The front surfaces and front sides of the cars forward of the front wheel account for 122 or 30.3% of those head and neck injury contacts. The most frequent regions of contact with hard structures were associated with the upper perimeter primary vehicle structures, e.g. headers, rails, and upper pillars. Note the frequency from the following data:

| <u>Contact Surface</u> | <u>Frequency</u> |
|------------------------|------------------|
| Front CF09 | 4 |
| CF19 | 8 |
| Side CS11 | 34 |
| cso9 | 18 |
| cs15 | 9 |
| CS29 | 18 |
| Back CB19 | 9 |
| CB29 | <u>6</u> |
| TOTAL | 106 |

These 106 contact surfaces (26.3%) represent some of the hardest surfaces on the automobile **exterior, in** the proximity of the rider's head and neck when collision occurs. The roof rail (**CS11**) is the most frequent surface contacted.

Table **8.7.5c** shows the rider head and neck injury contact surfaces for the pickup, truck, bus and van involvement.

The rider head and neck has injury contact with the undercarriage 7.4% of all head and neck injury contact surfaces.

Table **8.7.5d** shows the 721 rider head and neck injury contact surfaces contributed by the environment. The environment provides 55.9% of all **the** head and neck injury contacts, and pavement (**EA01, EC01**) and curbs (**EC06**) provide 76.7% of those impacts. Next in order of the frequency of threat is the combination of trees, poles, posts, barriers, and guardrails (**EC02, EC04, EM02, N04, EM08, EW02**) with 15.7% of those head and neck injury surfaces.

Table 8.7.6 (Appendix C.4) shows a cross-tabulation of the contact surface with the body region of the rider head and neck injuries. The application of these data explains the function of the contact surfaces in generating the region injury. A great variety of surfaces participate in a great variety of head and neck regions. The handlebars (**MC05**) make contact with **most** areas of the head and neck except the back of the head, the pavement (**EA01, EC01**) makes injury surface to all exposed areas of the head and neck, and all areas of the vehicles surfaces participate to some degree.

Table 8.7.7 (Appendix C.4) shows the cross-tabulation of the contact surface with the injury severity for the rider head and neck injuries. These data support some very basic concepts about injury mechanisms: (i) hard, rigid surfaces hurt more than soft, yielding surfaces and (ii) the fragile, vulnerable head and neck can be injured by impact with practically any surface. Consider the following examples extracted from Table 8.7.7:

| Surface | Contact Surface Injury AIS | | | | | | TOTAL |
|--------------------------------|----------------------------|---|----|---|----|---|-------|
| | 1 | 2 | 3 | 4 | 5 | 6 | |
| Concrete Curb EC06 | 23 | 7 | 12 | 4 | 10 | 3 | 59 |
| Wood Post, Tree EW02 | 13 | 3 | 3 | 1 | 4 | 2 | 26 |
| Side Door CS06 | 15 | 1 | 1 | 1 | 1 | 1 | 20 |
| Rear Side Fender CS14 | 13 | 3 | 2 | 0 | 1 | 0 | 19 |

The first two surfaces are hard and unyielding and the injuries with **AIS \geq 3** are typically 40 to 50% of the total. The second two surfaces are relatively soft and flexible and the injuries are typically 15 to 20% of the total. In this way, the hard surfaces are overrepresented and the soft surfaces are underrepresented but all surfaces participate easily in severe injury to the vulnerable head and neck.

8.8 Injury Association

The measure of injury severity is selected as the sum of the squares of the Abbreviated Injury Scores for the individual injuries. This does not employ the Injury Severity Score (**ISS**) as defined in the **AIS-80**, and will be referred to as the Severities Sum (**SS**). It is assumed here that the greater detail available for the individual injuries, and the standardization of injury description for the injuries of high severity, will provide a greater distinction for those factors which are associated with injury causation.

In these data, the Somatic Severities Sum (**SS1**) is combined with the Head and Neck severities sum (**SS2**) to provide the overall Severities Sum (**SS = SS1 + SS2**).

The status of the motorcycle rider injuries is summarized in Table 8.8.1, for the 900 on-scene, in-depth accident cases. These generalized descriptions of injury status are crosstabulated with Severities Sum (**SS**) in Table 8.8.2 (Appendix C.4). The critical parts of this crosstabulation are as follows:

| <u>Rider Treatment</u> | <u>Median ss</u> |
|--|------------------|
| 1. First Aid At Scene | 2.62 |
| 2. Treated, Released | 4.50 |
| 3. Hospitalized, 24 Hours | 6.51 |
| 4. Hospitalized, Significant Rx | 15.62 |
| 5. Outpatient Care | 2.32 |
| 6, 7, 8, 9. All Fatals | 105.0 |

TABLE 8.8.1. STATUS OF **RIDER** TRAUMATIC INJURIES (**OSIDs**)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------------|--------------|--------------------|------------------------|------------------------|
| First Aid-Scene | 1. | 80 | 8.9 | 10.1 |
| Treated, Released | 2. | 328 | 36.4 | 41.6 |
| Hospitalized - 24 Hours | 3. | 29 | 3.2 | 3.7 |
| Hospitalized-Significant Rx | 4. | 219 | 24.3 | 27.8 |
| Outpatient Care | 5. | 79 | 8.8 | 10.0 |
| Dead On Scene | 6. | 31 | 3.4 | 3.9 |
| Dead on Arrival | 7. | 10 | 1.1 | 1.3 |
| Fatal within 24 Hours | 8. | 9 | 1.0 | 1.1 |
| Other Fatal | 9. | 4 | 0.4 | 0.5 |
| Unknown | 98. | 4 | 0.4 | Missing |
| N.A. | 99. | 107 | 11.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

In these data, "First Aid At The Scene," and "Outpatient Care" are essentially equivalent treatment and are so reflected with approximately the same median SS, which corresponds to minor injury status. "Treatment and Released" has a higher median **SS**, but corresponding to the moderate injury status. "Hospitalized For Less Than 24 Hours" has even higher median **SS** which barely corresponds to the severe injury status. "Hospitalized For Significant Treatment" has the yet higher median **SS** of 15.62. which corresponds to the serious injury status.

If only one single fatal injury were incurred (**AIS:6**) the corresponding **SS** would be 36. The lowest fatal **SS** in these data was 46, and the case involved dominant head **injury** to an unhelmeted rider. At the 10% level the fatal **SS** was 58, and the median (50%) was 105.

The median non-fatal **SS** was 4.67, and a comparison of fatal and non-fatal **SS** is shown in Table 8.8.3 (Appendix C.4).

Table 8.8.4 shows a tabulation of the motorcycle crash speeds for the 900 on-scene, in-depth accident cases. Recall from Section 6.8 that for these accident data the median pre-crash speed is 29.8 mph and the median crash speed is 21.5 mph. Table 8.8.5 (Appendix C.4) crosstabulates these motorcycle crash speeds with overall severities sum (**SS**) for the motorcycle rider.

TABLE 8.8.4. MOTORCYCLE CRASH SPEED SUMMARY

| Category Label | Code | Absalute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| <u>Speed, mph</u> | | | | | |
| 1-10 | 1. | a3 | 9.2 | 9.2 | 9.2 |
| 11-20 | 2. | 349 | 38.8 | 38.8 | 48.1 |
| 21-30 | 3. | 270 | 30.0 | 30.0 | 78.1 |
| 31-40 | 4. | 129 | 14.3 | 14.3 | 92.4 |
| 41-50 | 5. | 32 | 3.6 | 3.6 | 96.0 |
| 51-60 | 6. | 24 | 2.7 | 2.7 | 98.7 |
| 61-70 | 7. | 9 | 1.0 | 1.0 | 99.7 |
| 71-80 | a. | 2 | 0.2 | 0.2 | 99.9 |
| N.A. | 99. | 1 | 0.1 | 0.1 | 100.0 |
| Unknown | 98. | 1 | 0.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 8.8.6 shows a summary of crash speed and grouped Severities Sums (**SS**). The groups are taken as essentially equivalent to the related overall Abbreviated Injury Scores, e.g., the range of **SS** from 6 through 12 relates to an overall **AIS** of approximately 3, or "**severe**" injury. These summarized data show that crash speed is a critical factor relating to injury severity at all levels of injury, and a simplified examination of these various injury levels is shown inTable8.8.7.

TABLE 8.8.6. SUMMARY OF INJURY SEVERITIES SUM (SS) BY CRASH SPEED

| SS | Count Row Pct | Crash Speed, mph | | | | | | | | | Total Col Pct |
|---------------------|------------------|------------------|-------------|-------------|-----------|-----------|----------|----------|----------|--------------|------------------|
| | | 0-10 | 11-20 | 21-30 | 31-40 | 41-50 | 51-60 | 61-70 | 71-80 | Unknown | |
| c-2 (Minor) | 33 18.8 | 90 51.2 | 35 19.9 | 15 8.5 | 1 0.6 | 0 0.0 | 1 6.6 | 0 0.0 | 1 0.6 | 176 19.8 | |
| 3-5 (Moderate) | 26 9.7 | 136 50.9 | 69 25.8 | 22 8.2 | 5 1.8 | 7 2.6 | 1 0.4 | 0 0.0 | 1 0.4 | 267 29.7 | |
| 6-12 (Severe) | 17 7.0 | 88 36.1 | 93 38.1 | 31 12.7 | 8 3.3 | 6 2.4 | 1 0.4 | 0 0.0 | 0 0.0 | 244 27.1 | |
| 13-20 (Serious) | 4 5.1 | 16 20.5 | 34 43.6 | 16 20.5 | 4 5.1 | 1 1.3 | 2 2.6 | 1 1.3 | 0 0.0 | 78 8.7 | |
| 21-30 (Critical) | 2 4.4 | 5 10.9 | 20 43.5 | 12 26.1 | 5 10.9 | 1 2.2 | 0 0.0 | 1 2.2 | 0 0.0 | 46 5.1 | |
| 31-42 (Fatal) | 0 0.0 | 3 14.3 | 8 38.1 | 8 38.1 | 1 4.8 | 1 4.8 | 0 0.0 | 0 0.0 | 0 0.0 | 21 2.3 | |
| 43+ (Fatal plus) | 1 1.5 | 11 16.2 | 11 16.2 | 25 36.8 | 8 11.8 | 8 11.8 | 4 5.9 | 0 0.0 | 0 0.0 | 68 7.6 | |
| TOTAL ROW PCT | 83 9.2 | 349 38.8 | 270 30.0 | 129 14.3 | 32 3.6 | 24 2.7 | 9 1.0 | 2 0.2 | 2 0.2 | 900 100.0 | |

Table 8.8.8 shows a tabulation of the motorcycle rider alcohol and drug involvement for the 900 on-scene, in-depth accident cases. As shown here, there was a confirmed involvement of alcohol and/or drugs for 11.8% of the motorcycle riders. To be sure, there was suspicion of alcohol and drug involvement in some other cases, but only the data shown were confirmed by investigation. Table 8.8.9 (Appendix C.4) crosstabulates these motorcycle rider alcohol and/or drug involvements with overall Severities Sum (SS) for the motorcycle rider.

Table 8.8.10 shows a summary of alcohol and/or drug involvement and grouped Severities Sum (SS). The groups are taken as essentially equivalent to the related overall Abbreviated Injury Scores, e.g., the range of SS from 31 through 42 relates to an overall AIS of approximately 6, or "fatal" injury and scores greater than 43 related extreme injury. These summarized data show that alcohol/drug involvement is a critical factor relating to injury severity at all levels, especially the fatal accident injury levels (SS ≥ 30). Table 8.8.11 illustrates these factors with simplified examination at various injury levels.

Table 8.8.12 shows a summary of motorcycle engine displacement for the 900 on-scene, in-depth accident cases. The motorcycles are grouped in engine displacement as follows:

| <u>Motorcycle Size</u> | <u>Description</u> |
|------------------------|--|
| 0-100cc | Small Motorcycles, Mini-bikes and Mopeds |
| 101-250cc | Lightweight Motorcycles |
| 251-500cc | Medium Motorcycles |
| 501-750cc | Large Motorcycles |
| Over 750cc | Heavyweight Motorcycles |

TABLE 8.8.7. INJURY SEVERITY BY CRASH SPEED

| (a) | SS | Crash Speed | | Total |
|-----|-------|--------------------|---------|-------|
| | | 0-30 mph | 30+ mph | |
| | 0-5 | 389 | 52 | 441 |
| | 6+ | 313 | 144 | 457 |
| | TOTAL | 702 | 196 | 898 |
| | | $(\chi^2 = 49.99)$ | | |

| (b) | SS | Crash Speed | | Total |
|-----|-------|--------------------|---------|-------|
| | | 0-30 mph | 30+ mph | |
| | 0-12 | 587 | 98 | 685 |
| | 13+ | 115 | 98 | 213 |
| | TOTAL | 702 | 196 | 898 |
| | | $(\chi^2 = 93.86)$ | | |

| (c) | SS | Crash Speed | | Total |
|-----|-------|---------------------|---------|-------|
| | | 0-30 mph | 30+ mph | |
| | 0-20 | 641 | 122 | 763 |
| | 21+ | 61 | 74 | 135 |
| | TOTAL | 702 | 196 | 898 |
| | | $(\chi^2 = 101.34)$ | | |

| (d) | SS | Crash Speed | | Total |
|-----|-------|--------------------|---------|-------|
| | | 0-30 mph | 30+ mph | |
| | 0-30 | 688 | 141 | 809 |
| | 31+ | 34 | 55 | 89 |
| | TOTAL | 702 | 196 | 898 |
| | | $(\chi^2 = 89.93)$ | | |

| (e) | SS | Crash Speed | | Total |
|-----|-------|--------------------|---------|-------|
| | | 0-30 mph | 30+ mph | |
| | 0-42 | 679 | 151 | 830 |
| | 43+ | 23 | 45 | 68 |
| | TOTAL | 702 | 196 | 898 |
| | | $(\chi^2 = 82.02)$ | | |

TABLE 8.8.8. SUMMARY OF RIDER ALCOHOL AND DRUG INVOLVEMENT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| HBD, Not Under Influence | 1. | 35 | 3.9 | 4.0 | 4.0 |
| HBD, Under Influence | 2. | 37 | 4.1 | 4.2 | 8.2 |
| HBD, Impairment Unknown | 3. | 23 | 2.6 | 2.6 | 10.8 |
| Drug Influence | 4. | 3 | 0.3 | 0.3 | 11.2 |
| Combination | 5. | 5 | 0.6 | 0.6 | 11.8 |
| N.A. | 9. | 773 | 85.9 | 88.2 | 100.0 |
| Unknown | 8. | 24 | 2.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 8.8.10. SS AND ALCOHOL/DRUG INVOLVEMENT SUMMARY

| ss | Rider Alcohol or Drug Involvement | | | | | | | Total |
|------------------------|-----------------------------------|-----|---------|----------------|--------------|---------|------|-------|
| | Had Been Drinking | | | Drug Influence | Combi-nation | Unknown | None | |
| | NUI | DUI | Unknown | | | | | |
| c-2 (Minor) | 4 | 9 | 2 | 0 | 0 | 5 | 156 | 176 |
| 3-5 (Moderate) | 11 | 8 | 4 | 1 | 0 | 5 | 238 | 267 |
| 6-12 (Severe) | 7 | 5 | 5 | 0 | 3 | 5 | 219 | 244 |
| 13-20 (Serious) | 4 | 1 | 4 | 0 | 0 | 3 | 66 | 78 |
| 21-30 (Critical) | 2 | 1 | 4 | 0 | 0 | 1 | 38 | 46 |
| 31-42 (Fatal) | 0 | 0 | 2 | 0 | 1 | 1 | 17 | 21 |
| 43+ (Fatal +) | 7 | 13 | 2 | 2 | 1 | 4 | 39 | 68 |
| TOTAL | 35 | 37 | 23 | 3 | 5 | 24 | 773 | 900 |

NOTE: NUI: Not Under Influence, .00% < BAC < .10%
DUI: Driving Under Influence, BAC ≥ .10%

TABLE 8.8.11. INJURY SEVERITY AND ALCOHOL/DRUG INVOLVEMENT

| | | | | |
|-----|------------|--------------------|-------------|------------|
| (a) | | <u>Involvement</u> | | |
| | ss | None | HBD+ | Total |
| | 0-5 | 394 | 39 | 433 |
| | 6+ | 379 | 64 | 443 |
| | TOTAL | 773 | 103 | 876 |
| | | $(\chi^2 = 5.73)$ | | |
| (b) | | <u>Involvement</u> | | |
| | ss | None | HBD+ | Total |
| | 0-12 | 613 | 59 | 672 |
| | 13+ | 160 | 44 | 204 |
| | TOTAL | 773 | 103 | 876 |
| | | $(\chi^2 = 23.45)$ | | |
| (c) | | <u>Involvement</u> | | |
| | ss | None | HBD+ | Total |
| | 0-20 | 679 | 68 | 747 |
| | 21+ | 94 | 35 | 129 |
| | TOTAL | 773 | 103 | 876 |
| | | $(\chi^2 = 32.75)$ | | |
| (d) | | <u>Involvement</u> | | |
| | ss | None | HBD+ | Total |
| | 0-30 | 717 | 75 | 792 |
| | 31+ | 56 | 28 | 84 |
| | TOTAL | 773 | 103 | 876 |
| | | $(\chi^2 = 39.42)$ | | |
| (e) | | <u>Involvement</u> | | |
| | ss | None | HBD+ | Total |
| | 0-42 | 734 | 78 | 812 |
| | 43+ | 39 | 25 | 64 |
| | TOTAL | 773 | 103 | 876 |
| | | $(\chi^2 = 46.81)$ | | |

TABLE 8.8.12. MOTORCYCLE ENGINE DISPLACEMENT SUMMARY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Engine Displacement, cc.</u> | | | | | |
| 0-100 | 1. | 83 | 9.2 | 9.2 | 9.2 |
| 101-250 | 2. | 120 | 13.3 | 13.3 | 22.6 |
| 251-500 | 3. | 327 | 36.3 | 36.3 | 58.9 |
| 501-750 | 4. | 228 | 25.3 | 25.3 | 84.2 |
| 750+ | 5. | 141 | 15.7 | 15.7 | 99.9 |
| Unknown | 8. | 1 | 0.1 | 0.1 | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 8.8.13 (Appendix C.4) shows a crosstabulation of motorcycle engine displacement and overall severities sum (SS) for the motorcycle riders. Table 8.8.14 shows a summary of motorcycle size and grouped severities sum (SS). The SS groups are taken as essentially equivalent to the related overall AIS. These summarized data show that the large motorcycles (>500 cc) are overrepresented in the higher levels of injury severity, and a significant plateau occurs in the approximate region of SS = 12. Large and heavyweight motorcycles are significantly overrepresented above this plateau, i.e., serious and critical injuries. Table 8.8.15 illustrates these factors with simplified examination at various injury levels.

TABLE 8.8.14. SUMMARY OF SEVERITIES SUM (SS) BY MOTORCYCLE ENGINE DISPLACEMENT

| SS | Count Row Pct | Engine Displacement, cc | | | | | | Total Col Pct |
|------------------|------------------|-------------------------|-------------|-------------|-------------|----------|--------------|------------------|
| | | 0-100 | 01-250 | 251-500 | 501-750 | 751+ | Unknown | |
| 0-2 (Minor) | 20 11.4 | 21 11.9 | 59 33.5 | 49 27.8 | 27 15.3 | 0 0.0 | 176 19.6 | |
| 3-5 (Moderate) | 22 8.2 | 46 17.2 | 102 38.2 | 61 22.8 | 36 13.5 | 0 0.0 | 267 29.7 | |
| 6-12 (Severe) | 27 11.1 | 34 13.9 | 94 38.5 | 55 22.5 | 34 13.9 | 0 0.0 | 244 27.1 | |
| 13-20 (Serious) | 5 6.4 | 9 11.5 | 23 29.5 | 24 30.8 | 17 21.8 | 0 0.0 | 78 8.7 | |
| 21-30 (Critical) | 4 8.7 | 2 4.3 | 18 39.1 | 9 19.6 | 12 26.1 | 1 2.2 | 46 5.1 | |
| 31-42 (Fatal) | 1 4.8 | 1 4.8 | 7 33.3 | 9 42.9 | 3 14.3 | 0 0.0 | 21 2.3 | |
| 43+ (Fatal Plus) | 4 5.9 | 7 10.3 | 24 35.3 | 21 29.4 | 12 17.6 | 0 0.0 | 68 7.6 | |
| Total Row Pct | 83 9.2 | 120 13.3 | 327 36.3 | 228 25.3 | 141 15.7 | 1 0.1 | 900 100.0 | |

TABLE 8.8.15. SS AND MOTORCYCLE SIZE

| | | | |
|-----|------------------------|-------------------|------------|
| (a) | <u>Motorcycle Size</u> | | |
| | ss | 0-500 cc | 501+ cc |
| | Total | | |
| | 0-5 6+ | 270 260 | 173 196 |
| | TOTAL | 530 | 369 |
| | | $(\chi^2 = 1.28)$ | |
| (b) | <u>Motorcycle Size</u> | | |
| | ss | 0-500 cc | 501+ cc |
| | Total | | |
| | 0-12 13+ | 425 105 | 262 107 |
| | TOTAL | 530 | 369 |
| | | $(\chi^2 = 9.68)$ | |
| (c) | <u>Motorcycle Size</u> | | |
| | ss | 0-500 cc | 501+ cc |
| | Total | | |
| | 0-20 21+ | 462 68 | 303 66 |
| | TOTAL | 530 | 369 |
| | | $(\chi^2 = 3.99)$ | |
| (d) | <u>Motorcycle Size</u> | | |
| | ss | 0-500 cc | 501+ cc |
| | Total | | |
| | 0-30 31+ | 486 44 | 324 45 |
| | TOTAL | 530 | 369 |
| | | $(\chi^2 = 3.27)$ | |
| (e) | <u>Motorcycle Size</u> | | |
| | ss | 0-500 cc | 501+ cc |
| | Total | | |
| | 0-42 43+ | 495 35 | 336 33 |
| | TOTAL | 530 | 369 |
| | | $(\chi^2 = 1.38)$ | |

8.9 Groin Injuries

Early in the course of data collection, it became apparent that a substantial number of riders (and **some** passengers) complained of injury to the groin and often diffuse abdominal pain. In most instances this was associated with a characteristic pattern of damage to the motorcycle in which the top and sides at the back of the fuel tank was deformed inwards. Indeed, it was often possible **to** tell the type of cloth of the rider's pants (such as corduroy) from the cloth marks left on the paint. Handlebars typically showed signs of rider contact such as bending or forward rotation in the clamps.

A total of 117 riders sustained groin injuries (13% of the 900 cases) which ranged from simple complaints of pain to rupture of the urinary and severe **lacera-**tions of the penis. Basic information defining the injury is shown in Table 8.9.1, which shows the distribution of lesion type and the system **or** organ involved. The large majority of groin injuries involved no external bleeding; contusion of the genitals accounted for 87.22 of the groin injuries. The lack of external trauma often led treating **physicans** to overlook the groin injury. Many of the riders were hospitalized for testing for internal injuries (testing was usually negative) when they were simply suffering referred pain from groin impact.

TABLE 8.9.1. GROIN INJURY LESION TYPE AND SYSTEM/ORGAN INVOLVED

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------|----------|--------------------|------------------------|------------------------|
| <u>Lesion Type</u> | | | | |
| Contusion | C | 102 | 87.2 | 87.2 |
| Laceration | L | 12 | 10.3 | 10.3 |
| Pain | P | 1 | 0.9 | 0.9 |
| Rupture | R | 1 | 0.9 | 0.9 |
| Avulsion | V | 1 | 0.9 | 0.9 |
| | TOTAL | 117 | 100.0 | 100.0 |
| <u>System/Organ</u> | | | | |
| Urogenital | G | 115 | 98.3 | 99.1 |
| Integument | I | 1 | 0.9 | 0.9 |
| Unknown | U | 1 | 0.9 | Missing |
| | TOTAL | 117 | 100.0 | 100.0 |

The distribution of groin injury severity is shown in Table 8.9.2. The majority of groin injuries were of a minor nature, at least as far as **AIS** scores are concerned. The severe and serious injuries demonstrated injury not only to the external genitalia, but involved pelvic and perineal structures as well, e.g., pelvic fractures and ruptures of the urinary bladder.

TABLE 8.9.2. GROIN INJURY SEVERITY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|------|--------------------|------------------------|------------------------|--------------------------|
| Minor | 1. | 92 | 78.6 | 78.6 | 78.6 |
| Moderate | 2. | 17 | 14.5 | 14.5 | 93.2 |
| Severe | 3. | 6 | 5.1 | 5.1 | 98.3 |
| Serious | 4. | 2 | 1.7 | 1.7 | 100.0 |
| TOTAL | | 117 | 100.0 | 100.0 | |

Collision Characteristics

The impact region on the motorcycle was defined for those accidents in which the rider sustained groin injuries. The distribution of impact regions is shown in Table 8.9.3. Two-thirds of the groin injury accidents were direct frontal collisions; frontal and angular-frontal (**F** + **RF** + **LF**) collisions **totalled** 89.7% of the groin injury accidents.

TABLE 8.9.3 COLLISION CONTACT LOCATION ON MOTORCYCLE GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|
| Left center | LC | 6 | 5.1 | 5.1 |
| Left Front | LF | 16 | 13.7 | 13.7 |
| Right Back | RB | 1 | 0.9 | 0.9 |
| Right Center | RC | 3 | 2.6 | 2.6 |
| Right Front | RF | 11 | 9.4 | 9.4 |
| Back | OB | 2 | 1.7 | 1.7 |
| Front | OF | 78 | 66.7 | 66.7 |
| TOTAL | | 117 | 100.0 | 100.0 |

While 74.1% of the 900 accidents were multiple-vehicle collisions, an unusually high proportion (91.5%) of the groin injury accidents involved another vehicle, as shown in Table 8.9.4.

TABLE 8.9.4. SINGLE OR MULTIPLE VEHICLE COLLISION GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|
| Single Vehicle Collision | 1. | 10 | 8.5 | 8.5 |
| Multi-Vehicle Collision | 2. | 107 | 91.5 | 91.5 |
| | TOTAL | 117 | 100.0 | 100.0 |

The distribution of crash speeds in groin injury accidents is shown in Table 8.9.5. The median speed shown in the table is 26.7 mph. This is substantially higher than the median crash speed of the 900 OSID cases, which was 21.5 mph.

TABLE 8.9.5. MOTORCYCLE CRASH SPEED IN GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Speed, mph</u> | | | | | |
| 0-10 | 1. | 3 | 2.6 | 2.6 | 2.6 |
| 11-20 | 2. | 25 | 21.4 | 21.4 | 23.9 |
| 21-30 | 3. | 45 | 38.5 | 38.5 | 62.4 |
| 31-40 | 4. | 36 | 30.8 | 30.8 | 93.2 |
| 41-50 | 5. | 5 | 4.3 | 4.3 | 97.4 |
| 51-60 | 6. | 2 | 1.7 | 1.7 | 99.1 |
| 61-70 | 7. | 1 | 0.9 | 0.9 | 100.0 |
| | TOTAL | 117 | 100.0 | 100.0 | |

The object(s) impacting the rider's groin region were defined for each accident. As can be seen in Table 8.9.6, the fuel tank is the predominating contact surface; of 117 riders suffering groin injury, 103 (88%) made contact with the fuel tank while 48.7% impacted the handlebars. The pattern of damage to the fuel tank was so typical that one could virtually predict the presence of groin injury on the basis of tank deformation.

TABLE 8.9.6. GROIN INJURY CONTACT SURFACES

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------------|--------------------|------------------------|------------------------|--------------------------|
| Car Bumper | CF01 | 1 | 0.5 | 0.5 | 0.5 |
| Headlamp, Front Corner | CF03 | 1 | 0.5 | 0.5 | 1.0 |
| Front Fender | CS02 | 1 | 0.5 | 0.5 | 1.5 |
| Front Door | CS06 | 1 | 0.5 | 0.5 | 2.0 |
| Rear Door | CS12 | 1 | 0.5 | 0.5 | 2.6 |
| Rear Fender | cs14 | 1 | 0.5 | 0.5 | 3.1 |
| Asphalt Pavement | EA01 | 2 | 1.0 | 1.0 | 4.1 |
| concrete Pavement | EC01 | 1 | 0.5 | 0.5 | 4.6 |
| Flat Soil | ES13 | 1 | 0.5 | 0.5 | 5.1 |
| Tree, Wooden Pole | EW02 | 1 | 0.5 | 0.5 | 5.6 |
| Tank Cap | MC01 | 2 | 1.0 | 1.0 | 6.6 |
| Fuel Tank | MC02 | 103 | 52.6 | 52.6 | 59.2 |
| Steering Head Assembly | MC03 | a | 4.1 | 4.1 | 63.3 |
| Handlebars | MC05 | 57 | 29.1 | 29.1 | 92.3 |
| Instruments | MC06 | 8 | 4.1 | 4.1 | 96.4 |
| Windshield | MC07 | 1 | 0.5 | 0.5 | 96.9 |
| Front Forks, Suspension | MC08 | 2 | 1.0 | 1.0 | 98.0 |
| Fairing | MC17 | 2 | 1.0 | 1.0 | 99.0 |
| Other Motorcycle Parts | MC97 | 2 | 1.0 | 1.0 | 100.0 |
| | TOTAL | 196 | 100.0 | 100.0 | |

The very high incidence of fuel tank involvement in groin injuries does not mean that the fuel tank is the grim destroyer of rider groin regions. In general, there is no more benign surface on the motorcycle; the fuel tank deforms readily under loading and thus tends to reduce the severity of injury relative to other surfaces on the motorcycle. The high level of fuel tank and handlebar involvement simply reflects the fact that 91.5% of the groin injury accidents are frontal or angular-frontal collisions and that--as elementary physics suggests--the rider tends to keep moving forward when the motorcycle stops, coming into contact with the objects immediately in front of him.

Motorcycle Characteristics

The manufacturers of motorcycles involved in groin injury accidents are shown in Table 8.9.7. The last column of numbers in the table shows the adjusted frequency of overall accident involvement for the same manufacturers in the 900 on-scene, in-depth investigations.

The displacements of motorcycles involved in groin injury accidents are shown in Table 8.9.8. The median displacement in the table is **480cc**. This is somewhat higher than the **420cc** median for the 900 OSID cases, but considerably less than the **650cc** median for the 54 fatal cases.

TABLE 8.9.7. MOTORCYCLE MANUFACTURERS, GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | OSID Adj. Frequency (%) |
|-------------------|-------|--------------------|------------------------|-------------------------|
| BMW | 3. | 3 | 2.6 | 1.6 |
| BSA | 4. | 2 | 1.7 | 0.9 |
| Ducati | 14. | 1 | 0.9 | 0.2 |
| Harley-Davidson | 20. | 18 | 15.4 | 10.6 |
| Honda | 23. | 59 | 50.4 | 55.7 |
| Kawasaki | 28. | 6 | 5.1 | 8.1 |
| Moto Guzzi | 35. | 2 | 1.7 | 0.8 |
| Norton | 40. | 3 | 2.6 | 0.7 |
| Suzuki | 54. | 6 | 5.1 | 4.4 |
| Triumph | 55. | 3 | 2.6 | 2.0 |
| Vespa | 60. | 1 | 0.9 | 0.8 |
| Yamaha | 62. | 13 | 11.1 | 12.2 |
| | TOTAL | 117 | 100.0 | 98.0 |

TABLE 8.9.8. MOTORCYCLE DISPLACEMENT, GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Engine Displacement, cc. | | | | | |
| 0 thru 100 | 1. | 6 | 5.1 | 5.1 | 5.1 |
| 101 thru 250 | 2. | 14 | 12.0 | 12.0 | 17.1 |
| 251 thru 500 | 3. | 42 | 35.9 | 35.9 | 53.0 |
| 501 thru 750 | 4. | 33 | 28.2 | 28.2 | 81.2 |
| >750 | 5. | 22 | 18.8 | 18.8 | 100.0 |
| | TOTAL | 117 | 100.0 | 100.0 | |

Of the 117 motorcycles involved in rider groin injury accidents, 21 (17.9%) were equipped with crash bars. This percentage is virtually identical to the 18.1% crash bar use in the 900 OSID cases and suggests that crash bars have no effect on groin injuries. This is a factor of importance which relates the uniqueness of motorcycle crash dynamics. The data are shown in Table 8.9.9.

TABLE 8.9.9. CRASH BAR USE IN GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 96 | 82.1 | 82.1 |
| Yes | 1. | 21 | 17.9 | 17.9 |
| | TOTAL | 117 | 100.0 | 100.0 |

The presence of a passenger behind the rider during a frontal collision might be expected to push the rider's groin more forcefully into the fuel tank and other Structures on the forward part of the motorcycle and to increase the incidence of groin injury. Indeed, films of laboratory crash tests conducted by **Bothwell** suggest that the passenger tends to "ramp" up over the rider during impact. Passengers were involved in 21 of the 117 accidents (17.9%) involving groin injury to the rider. This proportion is not substantially different than the 17.1% passenger involvement in the 900 OSID **cases**, and suggests that passengers have little to do with the incidence of groin injury in motorcycle accidents. These data are shown in Table 8.9.10.

TABLE 8.9.10. PASSENGER INVOLVEMENT IN RIDER GROIN INJURY ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------------|-----------|--------------------|------------------------|
| Number of Passengers | 0. | 96 | 82.1 |
| | 1. | 21 | 17.9 |
| | TOTAL | 117 | 100.0 |

Groin Injury Severity Factors

Groin injury severity was cross-tabulated with a number of factors to evaluate those which may affect severity. Collision contact on the motorcycle was thus cross-tabulated with severity and the data are shown in Table 8.9.11. Basically, the table shows no unusual relationship between groin injury severity and the location of impact to the motorcycle. For example, 23 of 25 (92%) groin injuries with **AIS-2** or higher occurred in frontal or angular-frontal collisions, which accounted for 87.9% of the groin injury accidents.

The cross-tabulation of groin injury severity with the injury contact surface is shown in Table 8.9.12 (Appendix C.4). Absolute frequencies in the table reflect the severity count by contact surface; since a single groin injury might have two contact surfaces, some groin injuries are counted twice. While fuel tank versus groin impacts accounted for 52.6% of the total groin impact surfaces, the fuel tank accounted for less than its share of **AIS-3** and **AIS-4** groin injuries, only 26.7%. This is consistent with the suggestion that the deformability and compliance of the fuel tank may contribute to lessening the severity of groin injury.

The relationship between crash speeds and groin injury severity is shown in Table 8.9.13 (Appendix C.4). Generally speaking, the severity of groin injury tends to increase as speeds increase. For example, the median speed at each severity level is as follows: **AIS-1:** 26.1 mph, **AIS-2:** 28.6 mph, **AIS-3:** 30.5 mph and **AIS-4:** 35 mph. Paradoxically, however, seven of the eight groin injury accidents with a crash speed over 40 mph were **AIS-1** (minor) severity.

TABLE 8.9.11. MOTORCYCLE COLLISION CONTACT BY GROIN INJURY SEVERITY

| Collision Contact | Count Row Pct Col Pct Tot Pct | Groin Injury Severity | | | | Row Total |
|---------------------|--|-----------------------|----------|--------|---------|-----------|
| | | Minor | Moderate | Severe | Serious | |
| Left Center | 5 | | 1 | 0 | 0 | 6 |
| | 83.3 | 16.7 | 0.0 | 0.0 | 5.1 | |
| | 5.4 | 5.9 | 0.0 | 0.0 | | |
| | 4.3 | 0.9 | 0.0 | 0.0 | | |
| Left Front | 10 | 5 | 1 | 0 | 16 | |
| | 62.5 | 31.3 | 6.3 | 0.0 | 13.7 | |
| | 10.9 | 29.4 | 16.7 | 0.0 | | |
| | 8.5 | 4.3 | 0.9 | 0.0 | | |
| Right Back | 1 | 0 | 0 | 0 | 1 | |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.9 | |
| | 1.1 | 0.0 | 0.0 | 0.0 | | |
| | 0.9 | 0.0 | 0.0 | 0.0 | | |
| Right Center | 3 | 0 | 0 | 0 | 3 | |
| | 100.0 | 0.0 | 0.0 | 0.0 | 2.6 | |
| | 3.3 | 0.0 | 0.0 | 0.0 | | |
| | 2.6 | 0.0 | 0.0 | 0.0 | | |
| Right Front | 9 | 1 | 1 | 0 | 11 | |
| | 81.8 | 9.1 | 9.1 | 0.0 | 9.4 | |
| | 9.8 | 5.9 | 16.7 | 0.0 | | |
| | 7.7 | 0.9 | 0.9 | 0.0 | | |
| Back | 1 | 0 | 1 | 0 | 2 | |
| | 50.0 | 0.0 | 50.0 | 0.0 | 1.7 | |
| | 1.1 | 0.0 | 16.7 | 0.0 | | |
| | 0.9 | 0.0 | 0.9 | 0.0 | | |
| Front | 63 | 10 | 3 | 2 | 78 | |
| | 80.8 | 12.8 | 3.8 | 2.6 | 66.7 | |
| | 68.5 | 58.8 | 50.0 | 100.0 | | |
| | 53.8 | 8.5 | 2.6 | 1.7 | | |
| Column Total | 92 | 17 | 6 | 2 | 117 | |
| | 78.6 | 14.5 | 5.1 | 1.7 | 100.0 | |

Injury severity was cross-tabulated with motorcycle manufacturer as shown in Table 8.9.14 (Appendix C.4). Honda, Kawasaki, Suzuki and Yamaha accounted for 80.4% of the 900 OSID accidents, 71.7% of the 117 groin injuries and only 52% of the groin injuries with AIS-2 or above. On the other hand, other motorcycles shown in this table accounted for 17.6% of the 900 OSID cases, 28.4% of the groin injuries and 48% of the groin injuries with AIS-2 or more. Honda, Kawasaki, Suzuki and Yamaha motorcycles are under-represented in groin injuries, while other motorcycles (as a group) are overrepresented, and this is statistically significant as shown below.

| | <u>AIS = 0</u> | <u>AIS ≥ 1</u> | TOTAL |
|------------------------------------|----------------|----------------|------------|
| Honda, Kawasaki, Suzuki, Yamaha | 640 | a4 | 724 |
| All Others | <u>143</u> | <u>33</u> | <u>176</u> |
| TOTAL | 783 | 117 | 900 |

$$(\chi^2 = 5.78)$$

| | <u>AIS = 1</u> | <u>AIS ≥ 2</u> | TOTAL |
|------------------------------------|----------------|----------------|-----------|
| Honda, Kawasaki, Suzuki, Yamaha | 71 | 13 | 84 |
| All Others | <u>21</u> | <u>12</u> | <u>33</u> |
| TOTAL | 92 | 25 | 117 |

$$(\chi^2 = 4.97)$$

Engine displacement was cross-tabulated with groin injury severity and the results are shown in Table 8.9.15. The data show that large motorcycles--those **over 500cc--accounted** for **more** than their share of serious and severe groin injuries.

Groin injuries rarely present any serious threat **to** the rider's life, but they **have** a peculiar poignancy that should not be overlooked. It is also worth noting that the long-term effects of groin injury in motorcycle accidents have not been studied here; serious long-term effects could belie the minor severity currently assigned to most groin injuries, which places them in a category with skinned knees and broken toes.

Bothwell's crash-testing of motorcycles years ago pointed out the necessity for considering rider groin impact in the design of fuel tanks; the suggestion is borne out by the current findings. Rider collision kinematics and human anatomy have not changed since that time and the design of fuel tanks must consider the minimization of groin injuries to the rider.

Any motorcycle rider considering modifications to his motorcycle that will raise the tank, steering head, etc., above seat height--either by installing a new tank, extending the front forks, lowering the seat or some combination of these--should consider that anything he puts in front of his groin region may contribute significant injury.

A final observation is that the groin injury is a signature characteristic of frontal impact on the motorcycle., The unrestrained motorcycle rider is expected to make groin area contact with those motorcycle surfaces immediately ahead of that body region. This situation is similar to the mechanism of chest impact with the steering wheel in automobile collisions. The analogy demands that modern motorcycle design minimize injury and provide smooth energy absorbing surfaces similar to modern automotive steering wheel design.

TABLE 8.9.15. GROIN INJURY SEVERITY BY ENGINE DISPLACEMENT (cc's)

| Count Row Pct Col Pct Tot Pct | 0-100 | 101-250 | 251-500 | 501-750 | 750+ | Row Total |
|--|---|--------------------------|---------------------------------|--|--|----------------------------|
| | Minor | 4 4.3 66.7 3.4 | 11 12.0 78.6 9.4 | 35 38.0 83.3 29.9 | 27 29.3 81.8 23.1 | 15 1b.3 68.2 12.8 |
| Moderate | 1 5.9 1b.7 0.9 | 3 17.6 21.4 2.6 | 6 35.3 14.3 5.1 | 4 23.5 12.1 3.4 | 3 17.6 13.6 2.6 | 17 14.5 |
| serious | 1 16.7 1b.7 0.9 | 0 0.0 0.0 0.0 | 1 1b.7 2.4 0.9 | 1 1b.7 3.0 0.9 | 3 50.0 13.6 2.6 | 6 5.1 |
| Severe | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 50.0 3.0 0.9 | 1 50.0 4.5 0.9 | 2 1.7 |
| Column Total | 6 5.1 | 14 12.0 | 42 35.9 | 33 28.2 | 22 18.8 | 117 100.0 |

9.0 HUMAN FACTORS-PROTECTION SYSTEMS EFFECTIVENESS

Because of the exposed position of the motorcycle rider, accident events provide great opportunity for **injury; hence protection** is necessary. This section deals with the various protection equipment, appliances and clothing which **is** available to motorcyclists, and evaluates the effectiveness of those materials in preventing or reducing injury. The accident data are analyzed to answer questions about safety helmet effectiveness, eye protection, leather jackets, heavy boots, etc., as well as distinguish those items which are most effective and which should be used by prudent motorcyclists.

9.1 Protection Systems - General Characteristics

The voluntary use of protection equipment by the motorcycle rider is the prudent thing to do simply because of the high probability of injury **in** the event of a motorcycle accident. The one item of protective equipment which is unique to the **motorcycle** is the safety helmet; no other vehicle in traffic use has an associated demand for head protection. Of course, a great quantity of **data** were collected to describe the use and performance of the safety helmets involved in these accidents, then associate that use with the detailed information on injuries. This sort of analysis can provide an adequate measure of helmet effectiveness in preventing head and neck **injury**, and then determine the value of safety helmet use as an injury countermeasure.

Table 9.1.1 shows the frequency of injury severity for the most severe injury experienced by the motorcycle riders in the 900 on-scene, in-depth accident cases. Distinction is made for those-900 cases for the motorcycle riders with a safety helmet (**355**), and those without a safety helmet (537). The population-at-risk shows voluntary helmet use of approximately **50%**, and those motorcycle riders involved in these accidents are approximately 40%. The distribution of helmeted and unhelmeted riders throughout the data of Table 9.1.1 at specific injury levels provides interesting but artificial contradictions. When the most severe injury is minor, the distribution according to helmet use is essentially that of the overall distribution, simply because that group is 50.8% of the total. When the **most** severe injury is moderate, severe and serious, the helmeted riders comprise more than the 40%; but when the **most** severe injury is critical or fatal, the helmeted riders comprise less than the 40%. This sort of comparison simply defines the contrast and does not specify the benefit or give explanation. Table 9.1.2 provides the equivalent data for the **most** severe injury for the 152 motorcycle passengers involved in the 900 on-scene, in-depth accident cases.

Table 9.1.3 provides the data for the **most** severe injury region for the motorcycle riders in the 900 on-scene, in-depth accident cases. As before, the population-at-risk has defined that voluntary helmet use in the study area is approximately **50%**, and the helmeted riders are approximately 40% of the accident population. The data of Table 9.1.3 have the potential logical conflict that two or more body regions could have the same highest level of injury severity, so priority is given that the most important of most severe injuries would be ranked in the following order: head, neck, face, chest, abdomen, pelvis and extremities. In this sort of comparison of helmeted and unhelmeted motorcycle riders, any contribution of the helmet use to injury to regions other than the head, face and neck must be

TABLE 9.1.1. FREQUENCY OF INJURY SEVERITY FOR MOST SEVERE INJURY, ALL REGIONS BY HELMET USE (900 MOTORCYCLE RIDERS)

| Most Severe Injury | Count Row Pct Col Pct Tot Pct | Helmet Use | | | ROW Total |
|---------------------|--|-------------|----------------|-----------|-----------|
| | | With Helmet | Without Helmet | Unknown | |
| None | 4 | 16 | 1 | 21 | |
| | 19.0 | 76.2 | 4.8 | 2.3 | |
| | 1.1 | 3.0 | 12.5 | | |
| | 0.4 | 1.8 | 0.1 | | |
| Minor | 180 | 274 | 3 | 457 | |
| | 39.4 | 60.0 | 0.7 | 50.8 | |
| | 50.7 | 51.0 | 37.5 | | |
| | 20.0 | 30.4 | 0.3 | | |
| Moderate | a4 | 111 | 2 | 197 | |
| | 42.6 | 56.3 | 1.0 | 21.9 | |
| | 23.7 | 20.7 | 25.0 | | |
| | 9.3 | 12.3 | 0.2 | | |
| Severe | 46 | 58 | 1 | 105 | |
| | 43.8 | 55.2 | 1.0 | 11.7 | |
| | 13.0 | 10.8 | 12.5 | | |
| | 5.1 | 6.4 | 0.1 | | |
| serious | 25 | 26 | 0 | 51 | |
| | 49.0 | 51.0 | 0.0 | 5.7 | |
| | 7.0 | 4.8 | 0.0 | | |
| | 2.8 | 2.9 | 0.0 | | |
| Critical | 7 | 29 | 1 | 37 | |
| | 18.9 | 78.4 | 2.7 | 4.1 | |
| | 2.0 | 5.4 | 12.5 | | |
| | 0.8 | 3.2 | 0.1 | | |
| Fatal | 9 | 21 | 0 | 30 | |
| | 30.0 | 70.0 | 0.0 | 3.3 | |
| | 2.5 | 3.9 | 0.0 | | |
| | 1.0 | 2.3 | 0.0 | | |
| Unknown | 0 | 2 | 0 | 2 | |
| | 0.0 | 100.0 | 0.0 | 0.2 | |
| | 0.0 | 0.4 | 0.0 | | |
| | 0.0 | 0.2 | 0.0 | | |
| Column Total | 355 | 537 | a | 900 | |
| | 39.4 | 59.7 | 0.9 | 100.0 | |

TABLE 9.1.2. FREQUENCY OF INJURY SEVERITY FOR HOST SEVERE INJURY, ALL REGIONS BY HELMET USE (152 MOTORCYCLE PASSENGERS)

| Most Severe Injury | Count Row Pct Col Pct Tot Pct | Helmet Use | | | ROW Total |
|--------------------|--|-------------|----------------|---------|-----------|
| | | With Helmet | Without Helmet | Unknown | |
| None | 2 | 2 | 1 | 5 | |
| | 40.0 | 40.0 | 20.0 | 3.3 | |
| | 8.3 | 1.6 | 100.0 | | |
| | 1.3 | 1.3 | 0.7 | | |
| Minor | 16 | 78 | 0 | 94 | |
| | 17.0 | 83.0 | 0.0 | 61.8 | |
| | 66.7 | 61.4 | 0.0 | | |
| | 10.5 | 51.3 | 0.0 | | |
| Moderate | 4 | 20 | 0 | 24 | |
| | 16.7 | 83.3 | 0.0 | 15.8 | |
| | 16.7 | 15.7 | 0.0 | | |
| | 2.6 | 13.2 | 0.0 | | |
| Severe | 2 | 15 | 0 | 17 | |
| | 11.8 | 88.2 | 0.0 | 11.2 | |
| | 8.3 | 11.8 | 0.0 | | |
| | 1.3 | 9.9 | 0.0 | | |
| Serious | 0 | 4 | 0 | 4 | |
| | 0.0 | 100.0 | 0.0 | 2.6 | |
| | 0.0 | 3.1 | 0.0 | | |
| | 0.0 | 2.6 | 0.0 | | |
| Critical | 0 | 7 | 0 | 7 | |
| | 0.0 | 100.0 | 0.0 | 4.6 | |
| | 0.0 | 5.5 | 0.0 | | |
| | 0.0 | 4.6 | 0.0 | | |
| Fatal | 0 | 1 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.7 | |
| | 0.0 | 0.8 | 0.0 | | |
| | 0.0 | 0.7 | 0.0 | | |
| | Column Total | 24 | 127 | 1 | 152 |
| | | 15.8 | 83.6 | 0.7 | 100.0 |

TABLE 9.1.3. REGION OF MOST **SEVERE** INJURY BY
HELMET USE
(900 MOTORCYCLE RIDERS)

| Region | Count Row Pct Col Pct Tot Pct | With Helmet | Without Helmet | Unknown | Row Total |
|-------------------------|--|-----------------------------|-------------------------|--------------|--------------|
| No Injury | 4 19.0 1.1 0.4 | 16 76.2 3.0 1.8 | 1 4.0 12.5 0.1 | 21 2.3 | |
| Extremities | 207 49.4 58.3 23.0 | 207 49.4 38.5 23.0 | 5 1.2 62.5 0.6 | 419 46.6 | |
| Pelvis | 28 45.2 7.9 3.1 | 33 53.2 6.1 3.7 | 1 1.6 12.5 0.1 | 62 6.9 | |
| Abdomen | 23 47.9 6.5 2.6 | 25 52.1 4.7 2.0 | 0 0.0 0.0 0.0 | 48 5.3 | |
| chest | 40 41.2 11.3 4.4 | 56 57.7 10.4 6.2 | 1 1.0 12.5 0.1 | 97 10.8 | |
| Face | 18 34.0 5.1 2.0 | 35 66.0 6.5 3.9 | 0 0.0 0.0 0.0 | 53 5.9 | |
| Neck | 11 36.7 3.1 1.2 | 19 63.3 3.5 2.1 | 0 0.0 0.0 0.0 | 30 3.3 | |
| Head | 23 13.7 6.5 2.6 | 145 86.3 27.0 16.1 | 0 0.0 0.0 0.0 | 168 18.7 | |
| unknown | 0 0.0 0.0 0.0 | 1 100.0 0.2 0.1 | 0 0.0 0.0 0.0 | 1 0.1 | |
| Whole Body | 1 100.0 0.3 | 0 0.0 0.0 | 0 0.0 0.0 | 1 0.1 | |
| Column Total | 355 39.4 | 537 59.7 | 8 0.9 | 900 100.0 | |

evaluated carefully. The major factor shown by the data of Table 9.1.3 is that **safety** helmet "se **isclearly** associated with reduced head, neck and face injuries.

Table 9.1.4 shows the **same** type of data for the region of most severe injuries to the 900 motorcycle riders, but all highest Injury severity duplicates are counted. Note the much larger count for the extremities injuries where it would be typical for the accident-involved motorcycle rider to experience abrasion, contusion and laceration in many areas of the extremities and each injury has **AIS = 1**. Also, note that the distribution of injuries counted for helmeted and unhelmeted riders now appears essentially the same as the accident population. **When** the effect of helmet "se **is** examined for the counted **most** severe head, neck and face injuries, the same approximate advantage is shown for helmeted riders having less head injuries, and less neck and face injuries.

Table 9.1.5 shows the data equivalent to that of Table 9.1.3, with the most severe injury region for the 152 passengers in the on-scene, in-depth accident cases. In the cases of duplicate most severe injuries, only one is counted with the priority of head, neck, face, chest, abdomen, pelvis and extremities. Because of the numerical requirements for significant dlstrubutinns, these data are useful only to show the distribution of those most severe injuries to the body regions for both helmeted and unhelmeted passengers. The only important distinction for helmet "se available from this comparison is that helmeted passengers have notably fewer cases of head injury.

The data of Tables 9.1.3 and 9.1.5 demonstrate the need for more specific separation of the factors associated with injury to the riders and passengers so that specific effects of protective equipment can be evaluated.

Table 9.1.6 shows the distribution of helmeted and unhelmeted motorcycle riders and passengers in the 900 on-scene, in-depth accident cases who suffered FATAL injuries. These 59 fatalities clearly demonstrate a general advantage for the use of the safety helmet: helmeted riders were 50% of the population-at-risk, 40% of the accident population, but only 20% of the fatal cases! Since the data are presented for FATAL cases only, the distinction of helmet "se is not significant. The **purposeisto** show that a characteristic of fatally injured motorcycle riders and passengers is that approximately 60% have critical or fatal head injuries.

Further analysis within this section will expose the specific factors of various Items of protective equipment.

9.2 Eye Protection

Table 9.2.1 shows the eye protection worn by the riders in the 900 accident cases; 73.2% of those riders had no eye protection at all! The predominating eye protection equipment (18.1%) was the wrap-around face shield which, of course, was a helmet appliance. The wrap-around face shield generally has only one curvature and has no significant optical quality problems. The bubbleshield, which has double curvature and the accompanying low optical quality, was 4.7% of the eye protection worn.

TABLE 9.1.4. REGION OF MOST SEVERE INJURIES
 BY HELMET USE
 (900 MOTORCYCLE RIDERS)
 HIGHEST INJURY SEVERITY DUPLICATES COUNTED

| Region | count Row Pct Col Pct Tot Pct | With Helmet | Without Helmet | unknown | Row Total |
|-------------------------|--|----------------|-------------------|---------|--------------|
| No Injury | 4 | 16 | 1 | 21 | |
| | 19.0 | 76.2 | 4.8 | 1.0 | |
| | 0.5 | 1.2 | 7.1 | | |
| | 0.2 | 0.7 | 0.0 | | |
| Extremities | 573 | 808 | 11 | 1392 | |
| | 41.2 | 58.0 | 0.8 | 65.0 | |
| | 72.0 | 60.3 | 78.6 | | |
| | 76.8 42 | 37.8 | 0.5 | | |
| Pelvis | 38.5 | 66 | 1 | 109 | |
| | | 60.6 | 0.9 | 5.1 | |
| | 5.3 | 4.9 | 7.1 | | |
| | 2.0 | 3.1 | 0.0 | | |
| Abdomen | 37 | 53 | 0 | 90 | |
| | 41.1 | 58.9 | 0.0 | 4.2 | |
| | 4.7 | 4.0 | 0.0 | | |
| | 1.7 | 2.5 | 0.0 | | |
| Chest | 65 | 95 | 1 | 161 | |
| | 40.4 | 59.0 | 0.6 | 7.5 | |
| | a.3 | 7.1 | 7.1 | | |
| | 3.0 | 4.4 | 0.0 | | |
| Face | 28 | 96 | 0 | 124 | |
| | 22.6 | 77.4 | 0.0 | 5.8 | |
| | 3.6 | 7.2 | 0.0 | | |
| | 1.3 | 4.5 | 0.0 | | |
| Neck | 12 | 34 | 0 | 46 | |
| | 26.1 | 73.9 | 0.0 | 2.1 | |
| | 1.5 | 2.5 | 0.0 | | |
| | 0.6 | 1.6 | 0.0 | | |
| Head | 24 | 167 | 0 | 191 | |
| | 12.6 | 87.4 | 0.0 | a.9 | |
| | 3.0 | 12.5 | 0.0 | | |
| | 1.1 | 7.8 | 0.0 | | |
| Unknown | 0 | 4 | 0 | 4 | |
| | 0.0 | 100.0 | 0.0 | 0.2 | |
| | 0.0 | 0.3 | 0.0 | | |
| | 0.0 | 0.2 | 0.0 | | |
| Whole Body | 2 | 0 | 0 | 2 | |
| | 100.0 | 0.0 | 0.0 | 0.1 | |
| | 0.3 | 0.0 | 0.0 | | |
| | 0.1 | 0.0 | 0.0 | | |
| Column Total | 787 | 1339 | 4 | 2140 | |
| | 36.8 | 62.6 | 0.7 | 100.0 | |

TABLE 9.1.5. REGION OF MOST SEVERE INJURY BY HELMET USE
(152 MOTORCYCLE PASSENGERS)

| Region | Count Row Pct Col Pct Tot Pct | With Helmet | Without Helmet | Unknown | Row Total |
|-------------------------|--|----------------|-------------------|--------------|--------------|
| No Injury | 2 | 2 | 1 | 5 | |
| | 40.0 | 40.0 | 20.0 | 3.3 | |
| | a.3 | 1.6 | 100.0 | | |
| | 1.3 | 1.3 | 0.7 | | |
| Extremities | 11 | 49 | 0 | 60 | |
| | 18.3 | a1.7 | 0.0 | 39.5 | |
| | 45.8 | 38.6 | 0.0 | | |
| | 7.2 | 32.2 | 0.0 | | |
| Pelvis | 1 | 7 | 0 | 8 | |
| | 12.5 | 87.5 | 0.0 | 5.3 | |
| | 4.2 | 5.5 | 0.0 | | |
| | 0.7 | 4.6 | 0.0 | | |
| Abdomen | 1 | 3 | 0 | 4 | |
| | 25.0 | 75.0 | 0.0 | 2.6 | |
| | 4.2 | 2.4 | 0.0 | | |
| | 0.7 | 2.0 | 0.0 | | |
| Chest | 4 | 21 | 0 | 25 | |
| | 16.0 | 84.0 | 0.0 | 16.4 | |
| | 16.7 | 16.5 | 0.0 | | |
| | 2.6 | 13.8 | 0.0 | | |
| Face | 1 | 9 | 0 | 10 | |
| | 10.0 | 90.0 | 0.0 | 6.6 | |
| | 4.2 | 7.1 | 0.0 | | |
| | 0.7 | 5.9 | 0.0 | | |
| Neck | 1 | 6 | 0 | 7 | |
| | 14.3 | 85.7 | 0.0 | 4.6 | |
| | 4.2 | 4.7 | 0.0 | | |
| | 0.7 | 3.9 | 0.0 | | |
| Head | 3 | 29 | 0 | 32 | |
| | 9.4 | 90.6 | 0.0 | 21.1 | |
| | 12.5 | 22.8 | 0.0 | | |
| | 2.0 | 19.1 | 0.0 | | |
| Whole Body | 0 | 1 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.7 | |
| | 0.0 | 0.8 | 0.0 | | |
| | 0.0 | 0.7 | 0.0 | | |
| Column Total | 24 15.8 | 127 83.6 | 1 0.7 | 152 100.0 | |

TABLE 9.1.6. MOTORCYCLE RIDERS AND PASSENGERS FATALLY INJURED WITH CRITICAL OR FATAL HEAD INJURIES

| Helmet Use | count Row Pct Col Pct Tot Pct | Head Injuries - AIS = 5 or 6 | | ROW Total |
|---------------------|--|------------------------------|-------|-----------|
| | | Yes | NO | |
| With Helmet | 7 | 5 | 12 | |
| | 58.3 | 41.7 | 20.3 | |
| | 20.6 | 20.0 | | |
| Without Helmet | 11.9 | 8.5 | | |
| | 27 | 19 | 4b | |
| | 58.7 | 41.3 | 78.0 | |
| Unknown | 79.4 | 76.0 | | |
| | 45.8 | 32.2 | | |
| | 0 | 1 | 1 | |
| | 0.0 | 100.0 | 1.7 | |
| | 0.0 | 4.0 | | |
| | 0.0 | 1.7 | | |
| Column Total | 34 | 25 | 59 | |
| | 57.6 | 42.4 | 100.0 | |

(54 riders; 5 passengers)

TABLE 9.2.1. MOTORCYCLE RIDER EYE PROTECTION (OSIDs)

| category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------|--------------|--------------------|------------------------|------------------------|
| None | 0. | 595 | 66.1 | 73.2 |
| Goggles | 1. | 28 | 3.1 | 3.4 |
| Wrap Shield | 2. | 114 | 12.7 | 14.0 |
| Bubble Shield | 3. | 38 | 4.2 | 4.7 |
| Visor and Shield | 4. | 33 | 3.7 | 4.1 |
| Other | 5. | 5 | 0.6 | 0.6 |
| Unknown | 8. | 49 | 5.4 | Missing |
| N.A. | 9. | 38 | 4.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 9.2.2 shows the color of the eye protection worn by the motorcycle riders in the 900 accident cases. The color was noted so that evaluation could be made to determine if shading would affect hazard detection in low light conditions.

Table 9.2.3 shows the type of glasses worn by the motorcycle riders in the 900 accident cases. Eye glass use data was collected independent of eye protection (Table 9.2.1). Non-prescription sunglasses were the most commonly used (17.1%)

TABLE 9.2.2. MOTORCYCLE RIDER BYE PROTECTION COLOR (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Clear | 1. | 140 | 15.6 | 63.3 |
| Green | 2. | 4 | 0.4 | 1.8 |
| Amber | 3. | 27 | 3.0 | 12.3 |
| Smoke | 4. | 38 | 4.2 | 17.3 |
| Blue | 5. | 8 | 0.9 | 3.6 |
| Other | 6. | 3 | 0.3 | 1.4 |
| Unknown | 8. | 42 | 4.7 | Missing |
| N.A. | 9. | 638 | 70.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 9.2.3. MOTORCYCLE RIDER EYEGLASSES WORE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------|-----------|--------------------|------------------------|------------------------|
| None | 0. | 521 | 57.9 | 64.5 |
| Prescription Glasses | 1. | 114 | 12.7 | 14.1 |
| Contact Lenses | 2. | 11 | 1.2 | 1.4 |
| Prescription Sunglasses | 3. | 21 | 2.3 | 2.6 |
| Contacts and Sunglasses | 4. | 1 | 0.1 | 0.1 |
| Non-Prescription Sunglasses | 5. | 138 | 15.3 | 17.1 |
| Non-Prescription Clear Glass | 6. | 2 | 0.2 | 0.2 |
| Unknown | 8. | 79 | 8.8 | Missing |
| N.A. | 9. | 13 | 1.4 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Prescription glasses, sunglasses and contact lenses were encountered with 18.2% of the accident-involved riders, and 6.0% of the riders required but did not wear corrective lenses at the time of the accident.

The lack of eye protection has some serious implications for accident involvement. If the motorcycle rider has no eye protection, the wind blast onto the bare eyes can cause tearing, squinting, blinking, accommodation, etc., and an overall impairment of vision which could delay hazard detection and degrade collision avoidance performance.

Table 9.2.4 provides a crosstabulation of motorcycle eye protection and eyeglass use for the 900 on-scene, in-depth accident cases. The outstanding feature of these data is that 39.8% of the accident-involved riders had neither eye protection nor eyeglasses. This group of motorcycle riders has been isolated for analysis and Tables 9.2.5, 6 and 7 show the **collision avoidance** performance of these 358 accident-involved motorcycle riders. This group without eye protection or eyeglasses is shown to perform just as badly as the other accident-involved riders but with inferior execution and choice of evasive action. Also, Table 9.2.8

TABLE 9.2.4. RIDER NE PROTECTION WORN BY TYPE OF GLASSES WORN BY RIDER (OSIDs)

| Count Row Pct Col Pct Tot Pct | None | Pre- scrip. Glasses | Con- tact Lenses | Pre- scrip. Sun- glasses | Con- tacts and Sun- glasses | Non- Pre. Sun- glasses | Non- Pre. Clear Glasses | Unknown | N.A. | Row Total |
|--|------|---------------------------|------------------------|-----------------------------------|--------------------------------------|---------------------------------|----------------------------------|---------|------|--------------|
| None | 358 | 61 | 6 | 17 | 1 | 114 | 2 | 33 | 3 | 595 |
| | 60.2 | 10.3 | 1.0 | 2.9 | 0.2 | 19.2 | 0.3 | 5.5 | 0.5 | 66.1 |
| | 68.7 | 53.5 | 54.5 | 81.0 | 100.0 | 82.6 | 100.0 | 41.8 | 23.1 | |
| | 39.8 | 6.8 | 0.7 | 1.9 | 0.1 | 12.7 | 0.2 | 3.7 | 0.3 | |
| Goggles | 24 | 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 28 |
| | 85.7 | 14.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.1 |
| | 4.6 | 3.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.7 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Wrap Shield | 76 | 23 | 3 | 4 | 0 | 7 | 0 | 1 | 0 | 114 |
| | 66.7 | 20.2 | 2.6 | 3.5 | 0.0 | 6.1 | 0.0 | 0.9 | 0.0 | 12.7 |
| | 14.6 | 20.2 | 27.3 | 19.0 | 0.0 | 5.1 | 0.0 | 1.3 | 0.0 | |
| | 8.4 | 2.6 | 0.3 | 0.4 | 0.0 | 0.8 | 0.0 | 0.1 | 0.0 | |
| Bubble Shield | 27 | 6 | 1 | 0 | 0 | 4 | 0 | 0 | 0 | 38 |
| | 71.1 | 15.8 | 2.6 | 0.0 | 0.0 | 10.5 | 0.0 | 0.0 | 0.0 | 4.2 |
| | 5.2 | 5.3 | 9.1 | 0.0 | 0.0 | 2.9 | 0.0 | 0.0 | 0.0 | |
| | 3.0 | 0.7 | 0.1 | 0.0 | 0.0 | 0.4 | 0.0 | 0.0 | 0.0 | |
| Visor and Shield | 21 | 5 | 1 | 0 | 0 | 6 | 0 | 0 | 0 | 33 |
| | 63.6 | 15.2 | 3.0 | 0.0 | 0.0 | 18.2 | 0.0 | 0.0 | 0.0 | 3.7 |
| | 4.0 | 4.4 | 9.1 | 0.0 | 0.0 | 4.3 | 0.0 | 0.0 | 0.0 | |
| | 2.3 | 0.6 | 0.1 | 0.0 | 0.0 | 0.7 | 0.0 | 0.0 | 0.0 | |
| Other | 2 | 1 | 0 | 0 | 0 | 2 | 0 | 0 | 0 | 5 |
| | 40.0 | 20.0 | 0.0 | 0.0 | 0.0 | 40.0 | 0.0 | 0.0 | 0.0 | 0.6 |
| | 0.4 | 0.9 | 0.0 | 0.0 | 0.0 | 1.4 | 0.0 | 0.0 | 0.0 | |
| | 0.2 | 0.1 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.0 | |
| Unknown | 3 | 5 | 0 | 0 | 0 | 0 | 0 | 41 | 0 | 49 |
| | 6.1 | 10.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 83.7 | 0.0 | 5.4 |
| | 0.6 | 4.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 51.9 | 0.0 | |
| | 0.3 | 0.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.6 | 0.0 | |
| N.A. | 10 | 9 | 0 | 0 | 0 | 5 | 0 | 4 | 10 | 38 |
| | 26.3 | 23.7 | 0.0 | 0.0 | 0.0 | 13.2 | 0.0 | 10.5 | 26.3 | 4.2 |
| | 1.9 | 7.9 | 0.0 | 0.0 | 0.0 | 3.6 | 0.0 | 5.1 | 76.9 | |
| | 1.1 | 1.0 | 0.0 | 0.0 | 0.0 | 0.6 | 0.0 | 0.4 | 1.1 | |
| Column Total | 521 | 114 | 11 | 21 | 1 | 138 | 2 | 79 | 13 | 900 |
| | 57.9 | 12.7 | 1.2 | 2.3 | 0.1 | 15.3 | 0.2 | 8.8 | 1.4 | 100.0 |

shows that this group without eye protection had their attention more directed to surrounding traffic and less directed to their own traffic situation.

Table 9.2.9 shows the accident cases where the rider eye coverage - either protection or glasses - was a factor in accident causation. The faulty eye protection (5 cases) consisted of the use of a scratched or tinted shield with sunglasses in low light conditions. The one case of eye protection limiting vision involved a rider wearing a set of 22 mm wire frame granny glasses with a 3 diopter correction, who did not see the pickup truck entering from a side street.

Table 9.2.10 shows the damage to the face shield, and the location of that damage. The great majority of the face shields are constructed from acetate sheet, approximately .040 thick and AA finish, in order to provide the necessary optical quality. The primary function is the protection of vision and there should not be high expectations for injury protection. The structural strength of the face shield can not compare with the protection function of the rigid helmet shell with an energy absorbing liner. As a result, the face shield can act only as abrasion protection and minor load spreading at impact sites. Table 9.2.10

TABLE 9.2.5. **MOTORCYCLE RIDER EVASIVE ACTION (UNPROTECTED EYES) (OSIDs)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|
| None | 0. | 106 | 29.6 | 30.0 |
| Rear Brake | 1. | 74 | 20.7 | 21.0 |
| Front Brake | 2. | 6 | 1.7 | 1.7 |
| Both Brakes | 3. | 50 | 14.0 | 14.2 |
| swerve | 4. | 35 | 9.8 | 9.9 |
| Lay Down-slide | 5. | 2 | 0.6 | 0.6 |
| Accelerate | 6. | 4 | 1.1 | 1.1 |
| land 4 | 7. | 44 | 12.3 | 12.5 |
| 2 and 4 | 8. | 3 | 0.8 | 0.8 |
| 3 and 4 | 9. | 25 | 7.0 | 7.1 |
| 4 and 6 | 10. | 1 | 0.3 | 0.3 |
| Other | 12. | 3 | 0.8 | 0.8 |
| Unknown | 98. | 5 | 1.4 | Missing |
| | TOTAL | 358 | 100.0 | 100.0 |

TABLE 9.2.6. **PROPER EXECUTION OF MOTORCYCLE EVASIVE ACTION (UNPROTECTED EYES)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|
| Yes | 1. | 47 | 13.1 | 19.3 |
| No | 2. | 196 | 54.7 | 80.7 |
| Unknown | 8. | 6 | 1.7 | Missing |
| N.A. | 9. | 109 | 30.4 | Missing |
| | TOTAL | 358 | 100.0 | 100.0 |

TABLE 9.2.7. **PROPER EVASIVE ACTION SELECTED ? (UNPROTECTED EYES)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|
| Yes | 1. | 98 | 27.4 | 39.8 |
| Probable | 2. | 4 | 1.1 | 1.6 |
| Improbable | 4. | 2 | 0.6 | 0.8 |
| No | 5. | 142 | 39.7 | 57.7 |
| Unknown | 8. | 4 | 1.1 | Missing |
| N.A. | 9. | 108 | 30.2 | Missing |
| | TOTAL | 358 | 100.0 | 100.0 |

TABLE 9.2.8. RIDW ATTENTION TO DRIVING TASK (UNPROTECTED EYES)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------------------|--------------|--------------------|------------------------|------------------------|
| Traffic | 1. | 31 | a.7 | 22.3 |
| Non-Traffic | 2. | 22 | 6.1 | 15.8 |
| Motorcycle operations | 3. | 15 | 4.2 | 10.8 |
| Inattentive Mode | 4. | 71 | 19.8 | 51.1 |
| Unknown | a. | 20 | 5.6 | Missing |
| N.A. | 9. | 199 | 55.6 | Missing |
| | TOTAL | 358 | 100.0 | 100.0 |

TABLE 9.2.9. RIDER FAILURE TO SEE BECAUSE OF NE COVERAGE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------|--------------|--------------------|------------------------|------------------------|
| None | 0. | 366 | 40.7 | 98.4 |
| Eye Pro. Faulty | 4. | 5 | 0.6 | 1.3 |
| Eye Pro. Limited | 5. | 1 | 0.1 | 0.3 |
| Unknown | a. | 37 | 4.1 | Missing |
| N.A. | 9. | 491 | 54.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 9.2.10. DAMAGE TO RIDER FACE SHIELD (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------------|--------------|--------------------|------------------------|------------------------|
| Type | | | | |
| None | 0. | 96 | 10.7 | 51.3 |
| Abrasion | 1. | 75 | 8.3 | 40.1 |
| Puncture | 2. | 1 | 0.1 | 0.5 |
| Crack | 3. | 9 | 1.0 | 4.8 |
| Shatter | 4. | 6 | 0.7 | 3.2 |
| Unknown | 8. | 39 | 4.3 | Missing |
| N.A.-No Face Shield | 9. | 674 | 74.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| Location | | | | |
| Center | 1. | 21 | 2.3 | 23.9 |
| Upper Right | 2. | 26 | 2.9 | 29.5 |
| Upper Left | 3. | 19 | 2.1 | 21.6 |
| Lower Right | 4. | 11 | 1.2 | 12.5 |
| Lower Left | 5. | 11 | 1.2 | 12.5 |
| Unknown | 8. | 41 | 4.6 | Missing |
| N.A.-No Damage or No Face Shield | 9. | 771 | 85.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

shows the abrasion absorption, and that the location of face shield damage is essentially **symmetrical** but **more** in the upper regions than lower regions.

In a few cases it was noted that the bubble shield offered slightly greater protection by virtue of the higher rigidity, which was due to the double curvature.

Table 9.2.11 shows that 6 cases involved injuries to the motorcycle rider from the eye protection. **Two** of the cases involved shattering of the lenses of eyeglasses and lacerations due to those fragments. The other four cases involved lacerations and abrasions due to the frames of eyeglasses worn.

TABLE 9.2.11. MOTORCYCLE RIDER RYE INJURIES DUE TO EYE PROTECTION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 241 | 26.8 | 97.6 |
| Yes | 1. | 6 | 0.7 | 2.4 |
| Unknown | a. | 25 | 2.8 | Missing |
| N.A. | 9. | 628 | 69.8 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

9.3 Safety Helmet Use

The study area for accident data collection had no laws for mandatory helmet use by motorcycle riders. Whatever forces affect helmet use were free to act upon the motorcycle riders and determine **the actual** use by those riders involved in accidents. During the interview after the accident, the motorcycle rider was questioned to distinguish several factors relating to safety helmet use. **For** example, the motorcycle rider was asked to relate the frequency of helmet use, and the results are shown in Table 9.3.1 (Appendix C.5). The riders stated a frequency of helmet use which is difficult to relate to actual use. The median use stated is approximately **74%**, and approximately 40% of the accident-involved riders were actually using a safety helmet at the accident occurrence. In the extremes, 28.1% stated that they **NEVER wear** a safety helmet but 32.8% stated that they **ALWAYS** wear a safety helmet. Note in Table 9.3.1 the frequencies of riders stating that they wore a safety helmet 90 through 99% of the time, and the only time they had not worn a helmet was that one short trip on which the accident occurred.

Table 9.3.2 shows the safety helmet use by the motorcycle riders in the 900 on-scene, in-depth accident cases. Of the 355 motorcycle riders wearing helmets, 261 were acquired primarily after the offer of replacement with a new helmet furnished by members of the Safety Helmet Council of America. Most of the 94 helmets not acquired were made available for examination and evaluation of crash performance. The data show that 39.8% of the accident-involved motorcycle riders were wearing safety helmets. Preliminary data for the **population-at-risk** showed approximately 50% of the motorcycle riders in the study were wearing safety helmets. A preliminary hypothesis to explain this difference

TABLE 9.3.2. MOTORCYCLE RIDER HELMET USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes, acquired by USC | 1. | 261 | 29.0 | 29.3 | 29.3 |
| Yes, not acquired by USC | 2. | 94 | 10.4 | 10.5 | 39.8 |
| NO | 3. | 537 | 59.7 | 60.2 | 100.0 |
| Unknown | a. | a | 0.9 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

proposed that motorcycle riders who voluntarily use safety helmets are less accident involved, in a way comparable to the lower accident involvement of voluntary seat belt users and alcohol non-users. Also, another explanation proposed was that the voluntary helmet users are less injured and more likely to depart the scene without medical treatment and without the completion of a police traffic accident report. The accident data unfortunately do not confirm or deny either proposition to explain the lower accident involvement of the helmeted riders.

The data of Table 9.3.3 show the equivalent helmet use data for the 3600 police traffic accident report cases. The accident forms for all law enforcement jurisdictions in the study area did not include requirements for noting helmet use. Consequently, the police traffic accident report would not include helmet use information unless the investigating officer made narrative note of that fact; such information usually resulted from the investigating officer's observation that head injuries resulted from failure to wear a safety helmet, or head injuries were prevented by the use of a safety helmet. For those cases including such information (23.2%), the accident-involved motorcycle rider was wearing a helmet in 42.0% of those cases.

TABLE 9.3.3. MOTORCYCLE RIDER HELMET USE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 351 | 9.7 | 42.0 | 42.0 |
| NO | 2. | 484 | 13.4 | 58.0 | 100.0 |
| Not Reported | 8. | 2765 | 76.8 | Missing | 100.0 |
| | TOTAL | 3600 | 100.0 | 100.0 | |

Table 9.3.4 shows the safety helmet use by the passengers in the 900 on-scene, in-depth accident cases. These data show the passenger use (15.9%) is far less than the rider use (39.8%). Table 9.3.5 shows the equivalent data for the 3600 traffic accident report cases and shows reporting for only 22.7% of the cases, and passenger helmet use in 19.7% of those.

TABLE 9.3.4. PASSENGER HELMET USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------|-----------|--------------------|------------------------|------------------------|--------------------------|
| Yes, acquired | 1. | 12 | 1.3 | 7.9 | 7.9 |
| Yes, not acquired | 2. | 12 | 1.3 | 7.9 | 15.9 |
| NO | 3. | 127 | 14.1 | 84.1 | 100.0 |
| Unknown | 8. | 1 | 0.1 | Missing | 100.0 |
| N.A. (No Passenger) | 9. | 748 | 83.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.3.5. PASSENGER HELMET USE (TARs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 25 | 0.7 | 19.7 | 19.7 |
| No | | | | | |
| Unknown-Not Reported | 2. 8. | 434 102 | 12.1 2.8 | Missing 80.3 | 100.0 100.0 |
| N.A. (No Passenger) | 9. | 3039 | 84.4 | Missing | 100.0 |
| | TOTAL | 3600 | 100.0 | 100.0 | |

Table 9.3.6 shows the motorcycle rider safety helmet use for the 54 fatal accidents within the 900 on-scene, in-depth accident cases. In these cases 22.6% of the fatally injured riders were wearing safety helmets. Of course, the fatal injuries ate not exclusively due to head injuries. But the advantage of the safety helmet was obvious in many ways. Many fatal accidents without helmet use involved low **energy yet** exceptional injury to the unprotected head; a few fatal accidents with helmet use involved very high energy and rare fatal injury to the helmeted head. For example, an **unhelmeted** rider fell while standing on the seat riding his new Sportster at low speed, and suffered a depressed fracture of the left side of the unprotected skull. In contrast, a rare case was the alcohol-involved rider who ran off the toad at high speed and whose helmeted head (and chest) were crushed between the tumbling Cold Wing and concrete curb.

TABLE 9.3.6. MOTORCYCLE RIDER **HELMET** USE-FATAL ACCIDENTS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 12 | 22.2 | 22.6 | 22.6 |
| NO | 3. | 41 | 75.9 | 77.4 | 100.0 |
| Unknown | a. | 1 | 1.9 | Missing | 100.0 |
| | TOTAL | 54 | 100.0 | 100.0 | |

Table 9.3.7 lists the reasons Stated by the motorcycle rider for not wearing a safety helmet. "No expectation of accident involvement" and "**helmet not** in possession" have essentially identical foundations and total 53.1% of those cases. A typical situation in this category is the motorcycle rider who **states** that he has a helmet at home but did not "**se it** because he **was going** lust for a short ride. "Inconvenient and uncomfortable" is a common complaint **on** hot-days, and is given support by the fact that helmet use declines significantly with high ambient temperatures. Table 9.3.8 lists the reasons stated by the passengers for not wearing a safety helmet, and the lack of expected accident involvement is the principal factor.

TABLE 9.3.7. **REASON** RIDER DID NOT WEAR HELMET

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Inconvenient | 1. | 115 | 12.8 | 25.6 | 25.6 |
| Excessive Cost | 2. | 30 | 3.3 | 6.7 | 32.2 |
| Reduce Awareness | 3. | 36 | 4.0 | 8.0 | 40.2 |
| No Expectation | 4. | 171 | 19.0 | 38.0 | 78.2 |
| Not in Possession | 5. | 68 | 7.6 | 15.1 | 93.3 |
| Wary of Helmet Injury | 6. | 17 | 1.9 | 3.8 | 97.1 |
| Other | 7. | 13 | 1.4 | 2.9 | 100.0 |
| Unknown | 8. | 96 | 10.7 | Missing | 100.0 |
| N.A. | 9. | 354 | 39.3 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.3.9 shows the conditions stated by the rider for wearing a helmet: 28.9% stated never; 36.7% Stated always. The response of "highway, freeway" should be combined with "other" for full consideration of expectation of accident involvement. The greatest part of "other" response was that the rider Stated helmet "Se for all but short trips". For example, a trip plan involving highway travel for great distance portends of possible hazard So a helmet would be used; but a short trip for recreation or errand would not relate threat So a helmet would not be worn.

TABLE 9.3.8. REASON PASSENGER DID NOT WEAR HELMET

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Inconvenient | 1. | 13 | 1.4 | 12.0 | 12.0 |
| Excessive Cost | 2. | 9 | 1.0 | 8.3 | 20.4 |
| Reduce Awareness | 3. | 2 | 0.2 | 1.9 | 22.2 |
| No Expectation | 4. | 48 | 5.3 | 44.4 | 66.7 |
| Not in Possession | 5. | 18 | 2.0 | 16.7 | 83.3 |
| Wary of Helmet Injury | 6. | 3 | 0.3 | 2.8 | 86.1 |
| Other | 7. | 15 | 1.7 | 13.9 | 100.0 |
| Unknown | 8. | 20 | 2.2 | Missing | 100.0 |
| N.A. (No Passenger) | 9. | 772 | 85.8 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.3.9. MOTORCYCLE RIDER CONDITIONS FOR WEARING HELMET

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Never | 0. | 204 | 22.7 | ~28.9 | 28.9 |
| Surface Roads | 1. | 8 | 0.9 | 1.1 | 30.0 |
| Highway, Freeway | 2. | 131 | 14.6 | 18.6 | 48.6 |
| Always | 3. | 259 | 28.8 | 36.7 | 85.3 |
| Other* | 4. | 104 | 11.6 | 14.7 | 100.0 |
| Unknown | 8. | 194 | 21.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

* Usually, "All But Short Trips."

In order to investigate the actual conditions under which safety helmets were worn by the accident-involved motorcycle riders, several crosstabulations were developed. Table 9.3.10 compares motorcycle rider helmet use and accident time of day for the 892 on-scene, in-depth cases where helmet use was identified. Note that the accident-involved riders have higher than average helmet use in the time span between 0601 and 1301, but this group consists of only 32.2% of the accidents. The accident-involved riders have average or below average use in the high frequency accident times.

Another factor in these data is that the accident-involved motorcycle riders have lower helmet use in the nighttime (34.9% from 1901 to 0701) than in the daytime (41.0% from 0701 to 1901).

Table 9.3.11 provides a crosstabulation of weather conditions at the time of the accident and motorcycle rider helmet use. These data show that these

TABLE 9.3.10. SAFETY HELMET USE BY ACCIDENT TIME OF DAY (OSIDs)

| Time | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total | Time | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|-----------------|--|--------------------------|--------------------------|--------------|-----------------|--|---------------------------|---------------------------|--------------|
| | | Yes | No | | | | Yes | No | |
| 0 thru 100 | 1. | 4 33.3 1.1 0.4 | 8 66.7 1.5 0.9 | 12 1.3 | 1201 thru 1300 | 13. | 39 42.4 11.0 4.4 | 53 57.6 9.9 5.9 | 92 10.3 |
| 101 thru 200 | 2. | 1 16.7 0.3 0.1 | 5 83.3 0.9 0.6 | 6 0.7 | 1301 thru 1400 | 14. | 21 31.3 5.9 2.4 | 46 68.7 8.6 5.2 | 67 7.5 |
| 201 thru 300 | 3. | 1 9.1 0.3 0.1 | 10 90.9 1.9 1.1 | 11 1.2 | 1401 thru 1500 | 15. | 28 35.0 7.9 3.1 | 52 65.0 9.7 5.8 | 80 9.0 |
| 301 thru 400 | 4. | 4 57.1 1.1 0.4 | 3 42.9 0.6 0.3 | 7 0.8 | 1501 thru 1600 | 16. | 36 38.7 10.1 4.0 | 57 61.3 10.6 6.4 | 93 10.4 |
| 401 thru 500 | 5. | 0 0.0 0.0 0.0 | 2 100.0 0.4 0.2 | 2 0.2 | 1601 thru 1700 | 17. | 27 31.0 7.6 3.0 | 60 69.0 11.2 6.7 | 87 9.8 |
| 501 thru 600 | 6. | 0 0.0 0.0 0.0 | 1 100.0 0.2 0.1 | 1 0.1 | 1701 thru 1800 | 18. | 29 38.7 8.2 3.3 | 46 61.3 8.6 5.2 | 75 8.4 |
| 601 thru 700 | 7. | 7 50.0 2.0 0.8 | 7 50.0 1.3 0.8 | 14 1.6 | 1801 thru 1900 | 19. | 18 42.9 5.1 2.0 | 24 57.1 4.5 2.7 | 42 4.7 |
| 701 thru 800 | 8. | 9 52.9 2.5 1.0 | 8 47.1 1.5 0.9 | 17 1.9 | 1901 thru 2000 | 20. | 14 31.1 3.9 1.6 | 31 68.9 5.8 3.5 | 45 5.0 |
| 801 thru 900 | 9. | 20 60.6 5.6 2.2 | 13 39.4 2.4 1.5 | 33 3.7 | 2001 thru 2100 | 21. | 9 27.3 2.5 1.0 | 24 72.7 4.5 2.7 | 33 3.7 |
| 901 thru 1000 | 10. | 22 64.7 6.2 2.5 | 12 35.3 2.2 1.3 | 34 3.8 | 2101 thru 2200 | 22. | 16 69.6 4.5 1.8 | 7 30.4 1.3 0.8 | 23 2.6 |
| 1001 thru 1100 | 11. | 15 44.1 4.2 1.7 | 19 55.9 3.5 2.1 | 34 3.8 | 2201 thru 2300 | 23. | 2 22.2 0.6 0.2 | 7 77.8 1.3 0.8 | 9 1.0 |
| 1101 thru 1200 | 12. | 30 47.6 8.5 3.4 | 33 52.4 6.1 3.7 | 63 7.1 | 2301 thru 2400 | 24. | 3 25.0 0.8 0.3 | 9 75.0 1.7 1.0 | 12 1.3 |
| Column Total | | 355 39.8 | 537 60.2 | 892 100.0 | Column Total | | 355 39.8 | 537 60.2 | 892 100.0 |

TABLE 9.3.11. **SAFETY** HELMET USE BY AMBIENT WEATHER CONDITIONS (OSIDs)

| Weather | count Row Pct Col Pct Tot Pct | Helmet | | ROW Total |
|------------------|--|--------|------|--------------|
| | | Yes | No | |
| Clear | | 290 | 454 | 744 |
| | | 39.0 | 61.0 | 83.4 |
| | | al.7 | 84.5 | |
| | | 32.5 | 50.9 | |
| Rain | | 4 | 5 | 9 |
| | | 44.4 | 55.6 | 1.0 |
| | | 1.1 | 0.9 | |
| | | 0.4 | 0.6 | |
| Drizzle | | 7 | 4 | 11 |
| | | 63.6 | 36.4 | 1.2 |
| | | 2.0 | 0.7 | |
| | | 0.8 | 0.4 | |
| Cloudy or Partly | | 42 | 47 | 89 |
| | | 47.2 | 52.8 | 10.0 |
| | | 11.8 | a.0 | |
| | | 4.7 | 5.3 | |
| Overcast | | 12 | 27 | 39 |
| | | 30.8 | 69.2 | 4.4 |
| | | 3.4 | 5.0 | |
| | | 1.3 | 3.0 | |
| | Column Total | 355 | 537 | 892 |
| | | 39.8 | 60.2 | 100.0 |

accident-involved motorcycle riders used helmets only slightly more than average (43.9% vs. 39.8%) when therewereactual or possible adverse weather conditions.

Table 9.3.12 shows a comparison of ambient temperature at the accident site and motorcycle rider helmet use. These data show **that** the accident-involved motorcycle riders used helmets slightly more than average (42.9% vs. 39.9%) when the ambient temperatures were less than 70°F.

Table 9.3.13 provides a summary of motorcycle rider age and helmet use for the 900 on-scene, in-depth accident cases. These data show a significant effect of age on helmet use with the youngest accident-involved riders having the lowest helmet use. Those motorcycle riders less than 27 years of age show significantly less than average helmet use (34.9% vs. 39.9%). The detailed crosstabulation of motorcycle rider age and helmet use is shown in Table 9.3.14 (Appendix c5).

TABLE 9.3.12. SAFETY HELMET USE BY AMBIENT TEMPERATURE (OSIDs)

| Temperature | COUNT Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|-----------------|--|-----------|-------------|--------------|
| | | Yes | No | |
| 41 thru 50 | 6 | 7 | 13 | |
| | 46.2 | 53.8 | 1.5 | |
| | 1.7 | 1.3 | | |
| | 0.7 | 0.8 | | |
| 51 thru 60 | 52 | 66 | 118 | |
| | 44.1 | 55.9 | 13.6 | |
| | 15.0 | 12.6 | | |
| | 6.0 | 7.6 | | |
| 61 thru 70 | 134 | 184 | 318 | |
| | 42.1 | 57.9 | 36.6 | |
| | 38.6 | 35.2 | | |
| | 15.4 | 21.1 | | |
| 71 thru 80 | 117 | 204 | 321 | |
| | 36.4 | 63.6 | 36.9 | |
| | 33.7 | 39.0 | | |
| | 13.4 | 23.4 | | |
| 81 thru 90 | 35 | 54 | 89 | |
| | 39.3 | 60.7 | 10.2 | |
| | 10.1 | 10.3 | | |
| | 4.0 | 6.2 | | |
| 91 thru 100 | 3 | a | 11 | |
| | 27.3 | 72.7 | 1.3 | |
| | 0.9 | 1.5 | | |
| | 0.3 | 0.9 | | |
| Column Total | 347 | 523 | 870 | |
| | 39.9 | 60.1 | 100.0 | |

Table 9.3.15 shows motorcycle rider sex and helmet use. While it is shown that the accident-involved female motorcycle riders had higher than average frequency of helmet use, the data are not sufficient in number to provide a significant result.

Table 9.3.16 provides a crosstabulation of motorcycle rider education and helmet use for the 900 on-scene, in-depth accident cases. These data portray a powerful effect of the educational experience of the accident-involved motorcycle rider; the voluntary helmet use is the highest at the highest level of education. It is highly significant that college education experienced riders had much higher than average helmet use (50.1% vs. 41.1%). This effect of educational experience reflects the beneficial consciousness of security associated with higher education,

TABLE 9.3.13. SUMMARY OF SAFETY HELMET USE BY MOTORCYCLE RIDER AGE (OSIDs)

| Age | count Row Pct Col Pct Tot Pct | Helmet | | | Row Total |
|-------------------------|--|-------------|----------|--------------|--------------|
| | | Yes | No | Unknown | |
| 0 thru 16 | 4 | 10 | 0 | 14 | |
| | 28.6 | 71.4 | 0.0 | 1.6 | |
| | 1.1 | 1.9 | 0.0 | | |
| | 0.4 | 1.1 | 0.0 | | |
| 17 thru 20 | 53 | 101 | 1 | 155 | |
| | 34.2 | 65.2 | 0.6 | 17.2 | |
| | 14.9 | 18.8 | 12.5 | | |
| | 5.9 | 11.2 | 0.1 | | |
| 21 thru 26 | 119 | 217 | 3 | 339 | |
| | 35.1 | 64.0 | 0.9 | 37.7 | |
| | 33.5 | 40.4 | 37.5 | | |
| | 13.2 | 24.1 | 0.3 | | |
| 27 thru 39 | 125 | 169 | 2 | 296 | |
| | 42.2 | 57.1 | 0.7 | 32.9 | |
| | 35.2 | 31.5 | 25.0 | | |
| | 13.9 | 18.8 | 0.2 | | |
| 40 thru 49 | 29 | 21 | 1 | 51 | |
| | 56.9 | 41.2 | 2.0 | 5.7 | |
| | 8.2 | 3.9 | 12.5 | | |
| | 3.2 | 2.3 | 0.1 | | |
| 50 thru 59 | 18 | 8 | 0 | 26 | |
| | 69.2 | 30.8 | 0.0 | 2.9 | |
| | 5.1 | 1.5 | 0.0 | | |
| | 2.0 | 0.9 | 0.0 | | |
| 60 thru 97 | 5 | 5 | 0 | 10 | |
| | 50.0 | 50.0 | 0.0 | 1.1 | |
| | 1.4 | 0.9 | 0.0 | | |
| | 0.6 | 0.6 | 0.0 | | |
| unknown | 2 | 5 | 1 | 8 | |
| | 25.0 | 62.5 | 12.5 | 0.9 | |
| | 0.6 | 0.9 | 12.5 | | |
| | 0.2 | 0.6 | 0.1 | | |
| N.A. | 0 | 1 | 0 | 1 | |
| | 0.0 | 100.0 | 0.0 | 0.1 | |
| | 0.0 | 0.2 | 0.0 | | |
| | 0.0 | 0.1 | 0.0 | | |
| Column Total | 355 39.4 | 537 59.7 | 8 0.9 | 900 100.0 | |

TABLE 9.3.15. SAFETY HELMET USE BY
MOTORCYCLE RIDER **SEX (OSIDs)**

| Sex | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|-------------------------|--|--------|------|--------------|
| | | Yes | No | |
| Male | | 340 | 518 | 858 |
| | | 39.6 | 60.4 | 96.2 |
| | | 95.8 | 96.5 | |
| | | 38.1 | 58.1 | |
| Female | | 15 | 19 | 34 |
| | | 44.1 | 55.9 | 3.8 |
| | | 4.2 | 3.5 | |
| | | 1.7 | 2.1 | |
| Column Total | | 355 | 537 | 892 |
| | | 39.8 | 60.2 | 100.0 |

and presents the formidable problem for K-12 education to establish personal priorities for protective equipment.

Table 9.3.17 shows the motorcycle rider helmet use as a function of occupation. The "unemployed" riders demonstrate the lowest helmet use of any group, with the helmet use rate of 17.6% being outstanding and significantly below the average of all accident-involved riders. The "laborers" involved in these accidents also demonstrated low helmet use (32.4%) which was significantly below the average (40.6%). The majority of the "unemployed" riders were "laborers" when employed.

Table 9.3.18 shows the crosstabulation of motorcycle rider training with helmet use for the 900 on-scene, in-depth accident cases. Those accident-involved motorcycle riders who were "self-taught" or taught by "friends-family" represent **the greatest** part of the accidents (91.9%). However, this group of untrained riders represents far more than their fair share of unprotected heads. The trained motorcycle riders (although they are scarce) show very high rates of helmet use and the comparison with untrained riders is highly significant. As an example, an Air Force airman who was a recent graduate of the Norton Air Force Base Motorcycle Training Program was passing through the study area and contributed to the accident data with a crash on the freeway. The airman was well protected with a heavy jacket, gloves, boots and a highly qualified full **facial coverage** helmet. The helmet was badly **damaged** in the high speed crash and fall, but all injuries were minor and the benefit of the training was clear.

Table 9.3.19 shows the **crosstabulation** of the street motorcycle rider experience and helmet use. These data show a great difference in safety helmet use at the 2 year experience level. It is significant that riders with less than 2 years experience average 35.3% helmet use, but riders with more than 2 years experience have a much higher average - 46.9% - of helmet use.

TABLE 9.3.16. SAFETY HELMET USE BY
MOTORCYCLE RIDER EDUCATION (OSIDs)

| Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|--|----------------------------------|------------------------------------|---------------------|
| | Yes | NO | |
| Grad School | 18 78.3 5.3 2.2 | 5 21.7 1.0 0.6 | 23 2.8 |
| College Graduate | 21 48.8 6.2 2.5 | 22 51.2 4.5 1.7 | 43 5.2 |
| Partial College | 143 48.1 42.2 17.3 | 154 51.9 31.7 18.7 | 297 36.0 |
| High School Graduate | 92 40.2 27.1 11.2 | 137 59.8 28.2 16.6 | 229 27.8 |
| Partial High School | 58 28.7 17.1 7.0 | 144 71.3 29.6 17.5 | 202 24.5 |
| Junior High School | 4 23.5 1.2 0.5 | 13 76.5 2.7 1.6 | 17 2.1 |
| Less than 7 Yrs | 3 21.4 0.9 0.4 | 11 78.6 2.3 1.3 | 14 1.7 |
| Column Total | 339 41.1 | 486 58.9 | 825 100.0 |

TABLE 9.3.17. SAFETY HELMET USE BY RIDER OCCUPATION (OSIDs)

| Count Row Pct Col Pct Tot Pct | Helmet | | Row Total | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|--|---------------------------|--------------------------|--------------|--|---------------------------|-----------------------------|--------------|
| | Yes | NO | | | Yes | No | |
| Professional | 38 60.3 10.8 4.4 | 25 39.7 4.8 2.9 | 63 7.3 | Laborers | 44 32.4 12.5 5.1 | 92 67.6 17.8 10.6 | 136 15.7 |
| Mgr, Administrator | 15 62.5 4.3 1.7 | 9 37.5 1.7 1.0 | 24 2.8 | Service Workers | 42 49.4 11.9 4.8 | 43 50.6 8.3 5.0 | 85 9.8 |
| Sales Worker | 4 30.8 1.1 0.5 | 9 69.2 1.7 1.0 | 13 1.5 | Housewife | 2 66.7 0.6 0.2 | 1 33.3 0.2 0.1 | 3 0.3 |
| Clerical | 28 45.2 8.0 3.2 | 34 54.8 6.6 3.9 | 62 7.1 | Student | 72 39.1 20.5 8.3 | 112 60.9 21.7 12.9 | 184 21.2 |
| Craftsman | 72 46.8 20.5 8.3 | 1538: 15.9 9.4 | 154 17.7 | Military | 53. ; 2.0 0.8 | 6 1.2 0.7 | 13 1.5 |
| operatives | 2 25.0 0.6 0.2 | 6 75.0 1.2 0.7 | 8 0.9 | Retired | 1 20.0 0.3 0.1 | 4 80.0 0.8 0.5 | 5 0.6 |
| Transport Operators | 9 33.3 2.6 1.0 | 18 66.7 3.5 2.1 | 27 3.1 | Unemployed | 16 17.6 4.5 1.8 | 75 82.4 14.5 8.6 | 91 10.5 |
| Column Total | 352 40.6 | 516 59.4 | 868 100.0 | Column Total | 352 40.6 | 516 59.4 | 868 100.0 |

| | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|--------------------------|--|--------|-------------|--------------|
| | | Yes | No | |
| Self Taught | 151 | 248 | 399 | |
| | 37.8 | 62.2 | 49.4 | |
| | 45.1 | 52.5 | | |
| | 18.7 | 30.7 | | |
| Friends - Family | 139 | 204 | 343 | |
| | 40.5 | 59.5 | 42.5 | |
| | 41.5 | 43.2 | | |
| | 17.2 | 25.3 | | |
| Motorcycle Course | 28 | 13 | 41 | |
| | 68.3 | 31.7 | 5.1 | |
| | 8.4 | 2.8 | | |
| | 3.5 | 1.6 | | |
| By Professionals | 15 | 5 | 20 | |
| | 75.0 | 25.0 | 2.5 | |
| | 4.5 | 1.1 | | |
| | 1.9 | 0.6 | | |
| Other | 2 | 2 | | |
| | 50.0 | 50.0 | 0.: | |
| | 0.6 | 0.4 | | |
| | 0.2 | 0.2 | | |
| Column Total | 3 3 5 | 4 7 2 | 807 | |
| | 41.5 | 58.5 | 100.0 | |

TABLE 9.3.18. SAFETY HELMET USE
BY MOTORCYCLE RIDER
TRAINING (OSIDs)

TABLE 9.3.19. SAFETY HELMET USE BY
MOTORCYCLE RIDER STREET RIDING
EXPERIENCE (OSIDs)

| | Count Row Pct Col Pct Tot Pct | Helmet | | |
|--------------------------|--|-------------|-------|--|
| | | Yes | No | |
| 0 to 6 months | 54 | 102 | 156 | |
| | 34.6 | 65.4 | 19.1 | |
| | 15.7 | 21.5 | | |
| | 6.6 | 12.5 | | |
| 7 to 12 months | 26 | 57 | 83 | |
| | 31.3 | 68.7 | 10.2 | |
| | 7.6 | 12.0 | | |
| | 3.2 | 7.0 | | |
| 1 to 2 years | 42 | 65 | 107 | |
| | 39.3 | 60.7 | 13.1 | |
| | 12.2 | 13.7 | | |
| | 5.1 | 8.0 | | |
| 2 to 3 years | 44 | 48 | 92 | |
| | 47.8 | 52.2 | 11.3 | |
| | 12.8 | 10.1 | | |
| | 5.4 | 5.9 | | |
| 3 to 4 years | 28 | 36 | 64 | |
| | 43.8 | 56.3 | 7.8 | |
| | 8.2 | 7.6 | | |
| | 3.4 | 4.4 | | |
| More than 4 years | 149 | 166 | 315 | |
| | 47.3 | 52.7 | 38.6 | |
| | 43.4 | 35.0 | | |
| | 18.2 | 20.3 | | |
| Column Total | 3 4 3 | 474 | 817 | |
| | 42.0 | 58.0 | 100.0 | |

Table 9.3.20 distinguishes the particular experience on the accident-involved motorcycle. These data show an outstanding contribution by the accident-involved riders with less than 6 months experience with the accident motorcycle. All other levels of experience greater than 6 months show higher than average helmet use.

TABLE 9.3.20. SAFETY HELMET USE BY MOTORCYCLE RIDER EXPERIENCE ON ACCIDENT-INVOLVED MOTORCYCLE (OSIDs)

| count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|--|-----------------------------|-----------------------------|--------------|
| | Yes | No | |
| 0 to 6 months | 166 33.9 47.6 19.5 | 323 66.1 64.2 37.9 | 489 57.4 |
| 7 to 12 months | 65 47.8 18.6 7.6 | 71 52.2 14.1 8.3 | 136 16.0 |
| 1 to 2 years | 58 51.8 16.6 6.8 | 54 48.2 10.7 6.3 | 112 13.1 |
| 2 to 3 years | 35 56.5 10.0 4.1 | 27 43.5 5.4 3.2 | 62 7.3 |
| 3 to 4 years | 11 42.3 3.2 1.3 | 15 57.7 3.0 1.8 | 26 3.1 |
| More than 4 years | 14 51.9 4.0 1.6 | 13 48.1 2.6 1.5 | 27 3.2 |
| Column Total | 349 41.0 | 503 59.0 | 852 100.0 |

Table 9.3.21 shows the crosstabulation of dirt bike experience and helmet use in the 900 accident cases. In these data the motorcycle riders with stated dirt bike experience have only slightly higher than average helmet use rate. If dirt bike riding experience is a beneficial training or experience effect, it is not significantly related to helmet use by these data.

TABLE 9.3.21. SAFETY HELMET USE BY DIRT BIKE EXPERIENCE (OSIDs)

| | count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|-------------------------|--|--------|------------|--------------|
| | | Yes | NO | |
| Dirt Bike Experience | Yes | 106 | 132 | 238 |
| | | 44.5 | 55.5 | 28.6 |
| | NO | 30.8 | 27.1 | |
| | | 12.8 | 15.9 | |
| Column Total | 238 | 355 | 593 | |
| | | 40.1 | 59.9 | 71.4 |
| | | 69.2 | 72.9 | |
| | | 28.6 | 42.7 | |
| | | 344 | 487 | 831 |
| | | 41.4 | 58.6 | 100.0 |

Table 9.3.22 provides one of the **most** important aspects of helmet use: the length of the intended trip. These data portray the highest helmet use for long trips (which may portend hazard or threat) and the lowest helmet **use** for the short trip (where no threat or hazard is related). Approximately half the accident cases show trip lengths less than five miles, and the lack of safety helmet use for these short trips is outstanding and far below the average. Note that helmet use for long trips is very high and implies that helmet use would tend to be high on long distance traffic ways, e.g., interstate highways, freeways, etc., and helmet use would tend to be low in urban and suburban traffic where short trips are common.

Table 9.3.23 shows safety helmet use as a function of trip origin. The highest rates of helmet **use are** associated with "work" as the origin. Table 9.3.24 shows that same highest helmet use associated with "work" as the destination.

Tables 9.3.25 (Appendix C.5) and 9.3.26 (Appendix C.5) show the trip plans for the helmeted (25) and **unhelmeted** (26) riders involved in the 900 on-scene, **in-**depth accident cases. These data portray a high rate of helmet use for the home-work trip plan, but low rates of helmet use for trip plans involving recreation and visiting friend and *relatives*, especially when that recreation, etc. is the origin.

Table 9.3.27 shows the type of helmet coverage used by the motorcycle riders in the 900 on-scene, in-depth accident cases.

TABLE 9.3.22. SAFETY HELMET USE BY RIDER
TRIP LENGTH (OSIDs)

| count Row Pct Col Pct Tot Pct | Helmet | | ROW Total |
|--|------------------------------------|-----------------------------|--------------|
| | Yes | NO | |
| 0 to 1 mile | 46 28.6 13.0 5.2 | 115 71.4 21.4 12.9 | 161 18.0 |
| 1.1 to 5 miles | 103 36.4 29.0 11.5 | 180 63.6 33.5 20.2 | 283 31.7 |
| 5 to 50 miles | 163 53.4 45.9 18.3 | 142 46.6 26.4 15.9 | 305 34.2 |
| Over 50 miles | 20 74.1 5.6 2.2 | 7 25.9 1.3 0.8 | 27 3.0 |
| Unknown | 23 19.8 6.5 2.6 | 93 80.2 17.3 10.4 | 116 13.0 |
| Column Total | 355 39.8 | 537 60.2 | 892 100.0 |

TABLE 9.3.23. SAFETY HELMET USE BY TRIP
ORIGIN (OSIDs)

| Origin | Count Row Pct Col Pct Tot Pct | Helmet | | Row Total |
|-------------------------|--|-------------|-------------|--------------|
| | | Yes | No | |
| Home | 140 | 174 | 314 | |
| | 44.6 | 55.4 | 38.3 | |
| | 40.7 | 36.6 | | |
| | 17.1 | 21.2 | | |
| Work | 99 | 64 | 163 | |
| | 60.7 | 39.3 | 19.9 | |
| | 28.8 | 13.4 | | |
| | 12.1 | 7.8 | | |
| Shopping | 28 | 61 | 89 | |
| | 31.5 | 68.5 | 10.9 | |
| | 8.1 | 12.8 | | |
| | 3.4 | 7.4 | | |
| Recreation | 19 | 56 | 75 | |
| | 25.3 | 74.7 | 9.1 | |
| | 5.5 | 11.8 | | |
| | 2.3 | 6.8 | | |
| Friends, Relative | 30 | 90 | 120 | |
| | 25.0 | 75.0 | 14.6 | |
| | 8.7 | 18.9 | | |
| | 3.7 | 11.0 | | |
| Bar, Drinking Party | 5 | 13 | 18 | |
| | 27.8 | 72.2 | 2.2 | |
| | 1.5 | 2.7 | | |
| | 0.6 | 1.6 | | |
| School | 23 | 18 | 41 | |
| | 56.1 | 43.9 | 5.0 | |
| | 6.7 | 3.8 | | |
| | 2.8 | 2.2 | | |
| Column Total | 344 | 476 | 820 | |
| | 42.0 | 58.0 | 100.0 | |

TABLE 9.3.24. SAFETY HELMET USE BY,
DESTINATION (OSIDs)

| Destination | COUNT | | Helmet | | Row Total |
|---------------------|---------|---------|--------|-------|-----------|
| | Row Pct | Col Pct | Yes | No | |
| Home | | | | 168 | 274 |
| | | | 38.7 | 61.3 | 33.1 |
| | | | 30.9 | 34.6 | |
| | | | 12.8 | 20.3 | |
| Work | | | 92 | 60 | 152 |
| | | | 60.5 | 39.5 | 18.3 |
| | | | 26.8 | 12.3 | |
| | | | 11.1 | 7.2 | |
| Shopping | | | 61 | 81 | 142 |
| | | | 43.0 | 57.0 | 17.1 |
| | | | 17.8 | 16.7 | |
| | | | 7.4 | 9.8 | |
| Recreation | | | 20 | 92 | 120 |
| | | | 23.3 | 76.7 | 14.5 |
| | | | 8.2 | 18.9 | |
| | | | 3.4 | 11.1 | |
| Friends, Relative | | | 46 | 69 | 115 |
| | | | 40.0 | 60.0 | 13.9 |
| | | | 13.4 | 14.2 | |
| | | | 5.5 | 8.3 | |
| Bar, Drinking Party | | | 0 | 1 | 1 |
| | | | 0.0 | 100.0 | 0.1 |
| | | | 0.0 | 0.2 | |
| | | | 0.0 | 0.1 | |
| School | | | 10 | 15 | 25 |
| | | | 40.0 | 60.0 | 3.0 |
| | | | 2.9 | 3.1 | |
| | | | 1.2 | 1.8 | |
| Column Total | | 343 | 486 | 829 | |
| | | 41.4 | 58.6 | 100.0 | |

TABLE 9.3.27. HELMET TYPE USED

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Partial | 1. | 32 | 3.6 | 9.4 | 9.4 |
| Full | 2. | 197 | 21.9 | 57.6 | 67.0 |
| Full Face 105° | 3. | 14 | 1.6 | 4.1 | 71.1 |
| Full Face 120° | 4. | 99 | 11.0 | 28.9 | 100.0 |
| unknown | 8. | 22 | 2.4 | Missing | 100.0 |
| N.A., No Helmet | 9. | 536 | 59.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

These data portray the helmet user in these accidents as distinctly different from the non-user. That accident-involved rider without head protection is young and without motorcycle experience and *training*, has low job skills and may be unemployed, and is on a short trip involving errands, recreation, and visits.

9.4 Helmet Manufacturer and Construction

Table 9.4.1 shows the manufacturer of the helmets worn by the motorcycle riders involved in the 900 **on-scene**, in-depth accident cases. In many instances, identification of the helmet was difficult and required consulting with the Safety Helmet Council of America and its membership to determine the origin. In spite of intensive examination of each helmet, positive identification of the helmet was not possible for 22.3% of the helmets. Of course, modern helmets complying with FMVSS 218 **were** readily **identified**. In addition, well **known** major brands of helmets were easily identified, and helmets made by members of the Safety Helmet Council of America were identified by the SHCA label and that reference provided date of manufacture. Also, those high performance helmets with labels specifying **the** Snell Memorial Foundation approval could be identified and dated by that reference.

Table 9.4.2 shows the year of manufacture for the motorcycle riders helmet. 48.6% of these accident-involved helmets could not be identified sufficiently for date of manufacture, and these helmets appeared to be more than just a few years old. Most of the unidentified and undated helmets appeared to be manufactured in the early 1970's, or late 1960's.

Table 9.4.3 shows the qualifications for the motorcycle riders helmets, **as** determined by labeling or manufacturer. Of the 364 accident-involved helmets, 62 (17.0%) had labels relating WT-FMVSS-218 qualification. Most of these helmets with "DOT" labels **were** of recent manufacture. SHCA labels were on 49.3% of the accident-involved helmets, and 53.1% of the helmets had notation of ANSI Z-90 qualification. The Snell Memorial Foundation qualification represents the highest qualification of protection performance, and various years of Snell labels were present on 22.8% of the accident helmets.

TABLE 9.4.1. MOTORCYCLE RIDER **HELMET** MANUFACTURER (OSIDs)

| category Level | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|--------------|--------------------|------------------------|------------------------|
| Accessory Dist. | 1. | 4 | 0.4 | 1.4 |
| American Safety | 2. | 21 | 2.3 | 7.4 |
| American sports | 7. | 9 | 1.0 | 3.2 |
| Ralph Barnes | 4. | 9 | 1.0 | 3.2 |
| Bell | 5. | 93 | 10.3 | 32.9 |
| Cycraft Mfg. | 8. | 1 | 0.1 | 0.4 |
| Electrofilm | 9. | 5 | 0.6 | 1.8 |
| Falcon | 10. | 2 | 0.2 | 0.7 |
| Lear Siegler | 13. | 10 | 1.1 | 3.5 |
| McHal | 14. | 6 | 0.7 | 2.1 |
| Premier Pacific | 17. | 7 | 0.8 | 2.5 |
| Premier Seat | 18. | 2 | 0.2 | 0.7 |
| Rebcor | 19. | 14 | 1.6 | 4.9 |
| Roper | 20. | 8 | 0.9 | 2.8 |
| Safetech | 21. | 18 | 2.0 | 6.4 |
| Shoei | 23. | 42 | 4.7 | 14.8 |
| T&C Mfg. | 25. | 5 | 0.6 | 1.8 |
| Trabaca | 26. | 3 | 0.3 | 1.1 |
| Yoder | 27. | 4 | 0.4 | 1.4 |
| Daytona Sports | 29. | 3 | 0.3 | 1.1 |
| Royal Industries | 31. | 5 | 0.6 | 1.8 |
| NJL-Abadon Prods. | 33. | 1 | 0.1 | 0.4 |
| Others | 97. | 11 | 1.2 | 3.9 |
| Unknown | 98. | 81 | 9.0 | Missing |
| N.A., No Helmet | 99. | 536 | 59.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 9.4.2. MOTORCYCLE RIDER HELMET YEAR OF MANUFACTURE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| 19__ | 68. | 1 | 0.1 | 0.5 | 0.5 |
| | 70. | 5 | 0.6 | 2.7 | 3.2 |
| | 71. | 6 | 0.7 | 3.2 | 6.4 |
| | 72. | 12 | 1.3 | 6.4 | 12.8 |
| | 73. | 24 | 2.7 | 12.8 | 25.7 |
| | 74. | 49 | 5.4 | 26.2 | 51.9 |
| | 75. | 39 | 4.3 | 20.9 | 72.7 |
| | 76. | 41 | 4.6 | 21.9 | 94.7 |
| | 77. | 10 | 1.1 | 5.3 | 100.0 |
| | Unknown | 98. | 177 | 19.7 | Missing |
| N.A. | 99. | 536 | 59.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.4.4 shows that the majority of the accident-involved helmets (76.6%) had fiberglass shell construction. The liner material at the location of the most severe impact is shown in Table 9.4.5. Ordinarily this liner material at the most severe impact site is the major energy absorbing material of the crown, but some impacts occurred where there was only comfort padding, chin padding, or nothing at all. The crushable expanded polystyrene foam was the liner material most usually found during helmet examination. Table 9.4.6 (Appendix C.5) shows the liner thickness measured at the most severe impact site. Those areas of impact with less than 5/8 inch liner thickness were areas of comfort padding, chin padding, or at areas near the edge of the liner. Very few helmets had basic liner thicknesses less than 5/8 inch, and these helmets were very old designs or equestrian helmets or moped helmets not intended for traffic use. The median liner thickness was almost .78 inch and approximately one-third of the helmets had liner thickness of one inch or more. Table 9.4.7 (Appendix C.5) shows the liner density at the most severe impact site, with the median density of 3.84 lbs. per cubic foot. Of course, the Styrofoam bead materials are essentially the only liner materials available at low density, and represent the greatest part of those liners of density less than 4 lbs. per cubic foot.

Approximately 15% of the liners had density greater than 6 lbs. per cubic foot. The liner materials in this range of density were ethafoam, nitrile-vinyl rubber, and polyurethane.

Table 9.4.8 shows the precrash condition of the motorcycle rider helmets involved in the 900 on-scene, in-depth accident cases. As shown with these data, 25.0% of the accident-involved helmets showed evidence of significant damage in advance of the accident. The damage to the fiberglass shell helmets was innocuous and did not affect accident performance. Typical damage involved punctures and lacerations of the liner interior surface from contact with motorcycle components and accessories, i.e., mirrors and sissybars. Damage to the fiberglass shell consisted mainly of superficial abrasions and chipping of the gelcoat and small delaminations at the vertex of the shell (from handling and dropping the helmet).

TABLE 9.4.3. MOTORCYCLE RIDER **HELMET** QUALIFICATION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---|--------------|--------------------|------------------------|------------------------|--------------------------|
| FMVSS-218 Labeled Helmet | | | | | |
| Yes | 1. | 62 | 6.9 | 20.0 | |
| No | 2. | 221 | 24.6 | 74.7 | |
| No, Disclaimer Attached | 3. | 13 | 1.4 | 4.4 | |
| Unknown | 8. | 68 | 7.6 | Missing | |
| N.A. | 9. | 536 | 59.5 | Missing | |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Safety Helmet Council of America Qualified | | | | | |
| Yes | 1. | 146 | 16.2 | 49.3 | 49.3 |
| No | 2. | 150 | 16.7 | 50.7 | 100.0 |
| Unknown | 8. | 68 | 7.6 | Missing | 100.0 |
| N.A. | 9. | 536 | 59.5 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| ANSI z-90 Qualification | | | | | |
| Yes, 1966 | 1. | 33 | 3.7 | 11.2 | 11.2 |
| Yes, 1971 | 2. | 123 | 13.7 | 41.8 | 53.1 |
| NO | 3. | 138 | 15.3 | 46.9 | 100.0 |
| Unknown | a. | 70 | 7.8 | Missing | 100.0 |
| N.A. | 9. | 536 | 59.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| Snell Foundation Qualification | | | | | |
| Yes, 1962 | 1. | 2 | 0.2 | 0.7 | 0.7 |
| Yes, 1968 | 2. | 17 | 1.9 | 5.8 | 6.5 |
| Yes, 1970 | 3. | 47 | 5.2 | 16.0 | 22.5 |
| Yes, 1975 | 4. | 1 | 0.1 | 0.3 | 22.8 |
| No | 5. | 227 | 25.2 | 77.2 | 100.0 |
| Unknown | a. | 70 | 7.8 | Missing | 100.0 |
| N.A. | 9. | 536 | 59.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.4.4. MOTORCYCLE RIDER HELMET SHELL MATERIAL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|
| Fiberglass | 1. | 249 | 27.7 | 76.6 |
| Polycarbonate | 2. | 76 | 8.4 | 23.4 |
| Unknown | 8. | 39 | 4.3 | Missing |
| N.A. | 9. | 536 | 59.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 9.4.5. HELMET LINER MATERIAL AT MOST SEVERE IMPACT SITE (OSIDs)

| Category Label | Code. | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 4 | 0.4 | 1.5 |
| Lg. Bd. Styrofoam | 1. | 32 | 3.6 | 12.2 |
| sm. Bd. Styrofoam | 2. | 183 | 20.3 | 69.6 |
| Polyurethane | 3. | 18 | 2.0 | 6.8 |
| Ethafoam | 4. | 15 | 1.7 | 5.7 |
| Neoprene Sponge | 5. | 5 | 0.6 | 1.9 |
| Polypropylene | 7. | 4 | 0.4 | 1.5 |
| Other | 8. | 2 | 0.2 | 0.8 |
| Unknown | | 52 | 5.8 | Missing |
| N.A. | 9. | 585 | 65.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

TABLE 9.4.8. PRECRASH CONDITION OF MOTORCYCLE RIDER SAFETY HELMET (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Damaged | 1. | 80 | 8.9 | 25.0 |
| Not Damaged | 2. | 240 | 26.7 | 75.0 |
| Unknown | 8. | 43 | 4.8 | Missing |
| N.A. | 9. | 537 | 59.7 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

The precrash damage evident in some polycarbonate shell helmets was more serious and affected crash performance. Craze and cracking in areas of high residual tensile **stress, particularly** at retention system rivet holes, were associated with premature shell fracture at impact with resultant retention failure or impact attenuation failure. Even this problem was very rare and the usual accident performance of the polycarbonate shell helmet was satisfactory and no other type of precrash damage affected accident performance.

9.5 Safety Helmet Retention System Performance

The retention system has the function of containing the head within the envelope of protection when the crash impact occurs. It is widely accepted that the helmet must fit well and the retention system must be securely fastened for the helmet to be retained on the head during crash impact. If the helmet fits loosely, the crash impact **may** cause the helmet to rotate and slip off the head **even** though the retention system is fastened. If the retention system **is not** fastened, the most minor impact is sure to dislodge the helmet and leave the head unprotected. Table 9.5.1 shows that 5.9% of the accident-involved motorcycle riders who wore a helmet did not have the retention system fastened.

TABLE 9.5.1. MOTORCYCLE RIDER HELMET RETENTION SYSTEM (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---|-------|--------------------|------------------------|------------------------|
| <u>Retention Systems Fastened-Rider</u> | | | | |
| Yes | 1. | 319 | 35.4 | 94.1 |
| No | 2. | 20 | 2.2 | 5.9 |
| Unknown | 8. | 25 | 2.8 | Missing |
| N.A. | 9. | 536 | 59.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Type Retention System-Rider</u> | | | | |
| None | 0. | 1 | 0.1 | 0.3 |
| D-Rings | 1. | 311 | 34.6 | 92.8 |
| snaps | 2. | 5 | 0.6 | 1.5 |
| 1 and 2 | 3. | 5 | 0.6 | 1.5 |
| Quick Release | 4. | 5 | 0.6 | 1.5 |
| Other | 5. | 8 | 0.9 | 2.4 |
| Unknown | 8. | 29 | 3.2 | Missing |
| N.A. | 9. | 536 | 59.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Also shown in Table 9.5.1 is the type of retention system on those motorcycle rider helmets. "D-rings" is the most typical configuration encountered, and experience has **shown** this configuration to have the highest reliability and strength. The one helmet without retention system had the conventional webbing and D-rings removed.

Table 9.5.2 shows that 5.3% of the helmets were not retained on the head during the crash impact. The **most** frequent cause of these helmet ejections was the unfastened retention system, which would seem to guarantee loss of the helmet during crash impact. Incredibly, some of the riders did retain the unfastened helmet during the accident.

TABLE 9.5.2. **MOTORCYCLE RIDER HELMET RETENTION PERFORMANCE (OSIDs)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------------------|-------|--------------------|------------------------|------------------------|
| <u>Helmet Stay on Head-Rider</u> | | | | |
| Yes | 1. | 324 | 36.0 | 94.7 |
| NO | 2. | 18 | 2.0 | 5.3 |
| Unknown | 8. | 22 | 2.4 | Missing |
| N.A. | 9. | 536 | 59.6 | Missing |
| | TOTAL | 900 | 100.0. | 100.0 |
| <u>Type Retention Failure-Rider</u> | | | | |
| D-Rings | 1. | 5 | 0.6 | 55.6 |
| Broke Rivet | 4. | 1 | 0.1 | 11.1 |
| Webbing Failed | 5. | 2 | 0.2 | 22.2 |
| Shell Failure at Rivet Hole | 6. | 1 | 0.1 | 11.1 |
| unknown | 8. | 25 | 2.8 | Missing |
| N.A. | 9. | 866 | 96.2 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Most of the retention system failures noted in Table 9.5.2 were associated with severe forces applied to the retention system. For example, one helmeted rider was run over after the initial crash impact and the D-rings were pulled open as the helmet was snagged by the undercarriage of the automobile. In this case, the damage to the retention system occurred during or after the impact attenuation and the failure did not relate to helmet ejection and injury causation.

Premature failure of the retention system due to inadequate strength or defect was rare. Cracking of the polycarbonate shell at the rivet hole caused premature shell fracture and subsequent retention failure for that one helmet.

The requirements of retention strength and stiffness specified in DOT-FMVSS-218 appear to be adequate. There appears to be no **need** for higher or lower retention strength. Also, no accident cases showed helmet ejection due to some unusual impact dynamic problem which would require dynamic testing of the retention

system. The accident data show that a correctly fitting full or full facial coverage helmet which is securely fastened will be retained during crash impact.

Table 9.5.3 shows the crosstabulation of type of helmet coverage and fastening of the retention system. Riders wearing the full facial coverage helmet were the **most** lax about fastening the retention system. However, the retention effect of the greater coverage did prevent some of these unfastened helmets from being ejected at crash impact.

TABLE 9.5.3. RETENTION SYSTEM FASTENED BY TYPE OF HELMET COVERAGE (OSIDs)

| Helmet Type | Count | | Retention System Fastened? | | | | ROW Total |
|----------------------------|---------|---------|----------------------------|------|---------|-------|-----------|
| | Row Col | Pct Tot | Yes | NO | Unknown | N.A. | |
| Partial | | 29 | 1 | 2 | 0 | 32 | |
| | | 90.6 | 3.1 | 6.3 | 0.0 | 3.6 | |
| | | 9.1 | 5.0 | 8.0 | 0.0 | | |
| | | 3.2 | 0.1 | 0.2 | 0.0 | | |
| Full | | 184 | 9 | 4 | 0 | 197 | |
| | | 93.4 | 4.6 | 2.0 | 0.0 | 21.9 | |
| | | 57.7 | 45.0 | 16.0 | 0.0 | | |
| | | 20.4 | 1.0 | 0.4 | 0.0 | | |
| Full Face 105 ^o | | 12 | 2 | 0 | 0 | 14 | |
| | | 85.7 | 14.3 | 0.0 | 0.0 | 1.6 | |
| | | 3.8 | 10.0 | 0.0 | 0.0 | | |
| | | 1.3 | 0.2 | 0.0 | 0.0 | | |
| Full Face 120 ^o | | 90 | 8 | 1 | 0 | 99 | |
| | | 90.9 | 8.1 | 1.0 | 0.0 | 11.0 | |
| | | 28.2 | 40.0 | 4.0 | 0.0 | | |
| | | 10.0 | 0.9 | 0.1 | 0.0 | | |
| Unknown | | 4 | 0 | 18 | 0 | 22 | |
| | | 18.2 | 0.0 | 81.8 | 0.0 | 2.4 | |
| | | 1.3 | 0.0 | 72.0 | 0.0 | | |
| | | 0.4 | 0.0 | 2.0 | 0.0 | | |
| N.A. | | 0 | 0 | 0 | 536 | 536 | |
| | | 0.0 | 0.0 | 0.0 | 100.0 | 59.6 | |
| | | 0.0 | 0.0 | 0.0 | 100.0 | | |
| | | 0.0 | 0.0 | 0.0 | 59.6 | | |
| Column Total | | 319 | 20 | 25 | 536 | 900 | |
| | | 35.4 | 2.2 | 2.8 | 59.6 | 100.0 | |

Table 9.5.4 shows a crosstabulation of type of helmet coverage and helmet retention. Comparison with Table 9.5.3 shows that the unfastened partial or full coverage helmet will make helmet ejection likely but the full facial coverage assists retention and fastening the retention system essentially insures retention.

TABLE 9.5.4. HELMET RETENTION PERFORMANCE BY TYPE OF HELMET COVERAGE (OSIDs)

| Helmet Type | Count Row Pct Col Pct Tot Pct | Helmet Retained? | | | | Row Total |
|----------------------------|--|------------------|------|---------|-----------|-----------|
| | | Yes | NO | Unknown | N.A. | |
| Partial | 27 | 3 | 2 | 0 | 32 | |
| | 84.4 | 9.4 | 6.3 | 0.0 | 3.6 | |
| | a.3 | 16.7 | 9.1 | 0.0 | | |
| | 3.0 | 0.3 | 0.2 | 0.0 | | |
| Full | 187 | 9 | 1 | 0 | 197 | |
| | 94.9 | 4.6 | 0.5 | 0.0 | 21.9 | |
| | 57.7 | 50.0 | 4.5 | 0.0 | | |
| | 20.8 | 1.0 | 0.1 | 0.0 | | |
| Full Face 105 ^o | 12 | 2 | 0 | 0 | 14 | |
| | 85.7 | 14.3 | 0.0 | 0.0 | 1.6 | |
| | 3.7 | 11.1 | 0.0 | 0.0 | | |
| | 1.3 | 0.2 | 0.0 | 0.0 | | |
| Full Face 120 ^o | 94 | 4 | 1 | 0 | 99 | |
| | 94.9 | 4.0 | 1.0 | 0.0 | 11.0 | |
| | 29.0 | 22.2 | 4.5 | 0.0 | | |
| | 10.4 | 0.4 | 0.1 | 0.0 | | |
| Unknown | 4 | 0 | 18 | 0 | 22 | |
| | 18.2 | 0.0 | 81.8 | 0.0 | 2.4 | |
| | 1.2 | 0.0 | 81.8 | 0.0 | | |
| | 0.4 | 0.0 | 2.0 | 0.0 | | |
| N.A. | 0 | 0 | 0 | 536 | 536 | |
| | 0.0 | 0.0 | 0.0 | 100.0 | 59.6 | |
| | 0.0 | 0.0 | 0.0 | 100.0 | | |
| | 0.0 | 0.0 | 0.0 | 59.6 | | |
| Column Total | 324 | 18 | 22 | 536 | 900 | |
| | 36.0 | 2.0 | 2.4 | 59.6 | 100.0 | |

Table 9.5.5 shows the evaluation of the helmet fit and that evaluation indicated no difficulty for 84.1% of the accident-involved riders. Retention or injury problems were associated with helmets that were loose; crash impact would allow the helmet to slip and **rotate** causing ejection or Injury due to interaction with eyeglasses.

Table 9.5.6 (Appendix C.5) provides a crosstabulation of helmet fit evaluation and **ethnicity**. There are no significant helmet fit problems shown related to **ethnicity**. However, it should be recalled that these are the accident-involved riders who were wearing helmets voluntarily.

TABLE 9.5.5. MOTORCYCLE RIDER HELMET FIT EVALUATION (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Too Tight | 1. | 14 | 1.6 | 4.5 | 4.5 |
| Correct | 2. | 260 | 28.9 | 84.1 | 88.7 |
| Large | 3. | 30 | 3.3 | 9.7 | 98.4 |
| Extra Loose | 4. | 3 | 0.3 | 1.0 | 99.4 |
| Contour Problems | 5. | 2 | 0.2 | 0.6 | 100.0 |
| Unknown | 8. | 58 | 6.4 | Missing | 100.0 |
| N.A. No Helmet | 9. | 533 | 59.2 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

9.6 Safety Helmet Weight

Table 9.6.1 shows the weight of the safety helmet worn by the motorcycle riders in the 900 on-scene, **in-depth** accident cases. The median **weight** is **approximately 2½** pounds and this represents the typical medium size full coverage safety helmet. Those three helmets weighing less than 1.75 lbs were not conventional motorcycle safety helmets but were lightweight equestrian or moped helmets generally unsuitable for traffic use.

TABLE 9.6.1. MOTORCYCLE RIDER HELMET WEIGHT (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <1.75 | 1. | 3 | 0.3 | | 1.2 |
| 1.75-1.99 | 2. | 12 | 1.3 | 2.0 | 5.8 |
| 2.00-2.24 | 3. | 24 | 2.7 | 9.3 | 15.2 |
| 2.25-2.49 | 4. | 52 | 5.8 | 20.2 | 35.4 |
| 2.50-2.74 | 5. | 61 | 6.8 | 23.7 | 59.1 |
| 2.75-2.99 | 6. | 41 | 4.6 | 16.0 | 75.1 |
| 3.00-3.24 | 7. | 35 | 3.9 | 13.6 | 88.7 |
| >3.25 | 8. | 29 | 3.2 | 11.3 | 100.0 |
| Unknown | 98. | 106 | 11.8 | Missing | 100.0 |
| N.A. | 99. | 537 | 59.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.6.2 shows a crosstabulation of the safety helmet type and weight. The general tendency shown is that the heavier helmets are those with full facial coverage. Since there are no appliances of significant weight, the higher weight helmets correspond to **more** shell and more liner for **more** complete coverage, and implied greater protection.

TABLE 9.6.2. HELMET WEIGHT BY HELMET TYPE (OSIDs)

| Weight | Count Row Pct Col Pct Tot Pct | Helmet Type | | | | | Row Total |
|------------------|--|-------------|------|------------------------|------------------------|---------|--------------|
| | | Partial | Full | Full Facial- 105 | Full Facial- 120 | Unknown | |
| < 1.75 lbs | 3 | 0 | 0 | 0 | 0 | 0 | 3 |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 |
| | 9.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| 1.75 to 1.99 lbs | a | 4 | 0 | 0 | 0 | 0 | 12 |
| | 66.7 | 33.3 | 0.0 | 0.0 | 0.0 | 0.0 | 1.3 |
| | 25.0 | 2.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.9 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | |
| 2.00 to 2.24 lbs | 6 | 17 | 0 | 1 | 0 | 0 | 24 |
| | 25.0 | 70.8 | 0.0 | 4.2 | 0.0 | 0.0 | 2.7 |
| | 18.8 | 8.6 | 0.0 | 1.0 | 0.0 | 0.0 | |
| | 0.7 | 1.9 | 0.0 | 0.1 | 0.0 | 0.0 | |
| 2.25 to 2.49 lbs | 3 | 46 | 0 | 3 | 0 | 0 | 52 |
| | 5.8 | 88.5 | 0.0 | 5.8 | 0.0 | 0.0 | 5.8 |
| | 9.4 | 23.4 | 0.0 | 3.0 | 0.0 | 0.0 | |
| | 0.3 | 5.1 | 0.0 | 0.3 | 0.0 | 0.0 | |
| 2.50 to 2.74 lbs | 2 | 40 | 0 | 19 | 0 | 0 | 61 |
| | 3.3 | 65.6 | 0.0 | 31.1 | 0.0 | 0.0 | 6.8 |
| | 6.3 | 20.3 | 0.0 | 19.2 | 0.0 | 0.0 | |
| | 0.2 | 4.4 | 0.0 | 2.1 | 0.0 | 0.0 | |
| 2.75 to 2.99 lbs | 0 | 23 | 1 | 17 | 0 | 0 | 41 |
| | 0.0 | 56.1 | 2.4 | 41.5 | 0.0 | 0.0 | 4.6 |
| | 0.0 | 11.7 | 7.1 | 17.2 | 0.0 | 0.0 | |
| | 0.0 | 2.6 | 0.1 | 1.9 | 0.0 | 0.0 | |
| 3.00 to 3.24 lbs | 0 | 12 | 2 | 21 | 0 | 0 | 35 |
| | 0.0 | 34.3 | 5.7 | 60.0 | 0.0 | 0.0 | 3.9 |
| | 9.0 | 6.1 | 14.3 | 21.2 | 0.0 | 0.0 | |
| | 0.0 | 1.3 | 0.2 | 2.3 | 0.0 | 0.0 | |
| 3.25 and Over | 0 | 2 | 8 | 19 | 0 | 0 | 29 |
| | 0.0 | 6.9 | 27.6 | 65.5 | 0.0 | 9.0 | 3.2 |
| | 0.0 | 1.0 | 57.1 | 19.2 | 0.0 | 0.0 | |
| | 0.0 | 0.2 | 0.9 | 2.1 | 0.0 | 0.0 | |
| Unknown | 10 | 53 | 3 | 18 | 22 | 0 | 106 |
| | 9.4 | 50.0 | 2.8 | 17.0 | 20.8 | 0.0 | 11.6 |
| | 31.3 | 26.9 | 21.4 | 18.2 | 100.0 | 0.0 | |
| | 1.1 | 5.9 | 0.3 | 2.0 | 2.4 | 0.0 | |
| N.A. | 0 | 0 | 0 | 1 | 0 | 536 | 537 |
| | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | 99.8 | 59.7 |
| | 0.0 | 0.0 | 0.0 | 1.0 | 0.0 | 100.0 | |
| | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 59.6 | |
| Column Total | 32 | 197 | 14 | 99 | 2 | 5 3 6 | 900 |
| | 3.6 | 21.9 | 1.6 | 11.0 | 2.4 | 59.6 | 100.0 |

9.7 Safety Helmet Color

Table 9.7.1 shows the predominating color of the motorcycle rider safety helmet. White helmets predominate as 37.7% of the total. Helmet color is not expected to be a significant factor affecting conspicuity because the helmet surface presented to the other vehicle involved in collision is the (open) **facial** region. Because of the large open space required for vision, only a small part of the helmet surface is available to contribute to conspicuity. If conspicuity treatments were to be applied to the safety helmet, the effective treatments must be applied to the front of the helmet, visor and face shield without limiting required visual space,

TABLE 9.7.1. SAFETY HELMET COLOR (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| White | 1. | 125 | 13.9 | 37.7 | 37.7 |
| Yellow | 2. | 11 | 1.2 | 3.3 | 41.0 |
| Orange | 3. | 36 | 4.0 | 10.8 | 51.8 |
| Black | 4. | 20 | 2.2 | 6.0 | 57.8 |
| Brown | 5. | 13 | 1.4 | 3.9 | 61.7 |
| Blue | 6. | 42 | 4.7 | 12.7 | 74.4 |
| Red | 7. | 46 | 5.1 | 13.9 | 88.3 |
| Purple | 8. | 3 | 0.3 | 0.9 | 89.2 |
| Green | 9. | 5 | 0.6 | 1.5 | 90.7 |
| Silver | 10. | 17 | 1.9 | 5.1 | 95.8 |
| Grey | 11. | 3 | 0.3 | 0.9 | 96.7 |
| Gold | 12. | 8 | 0.9 | 2.4 | 99.1 |
| Metal Flake | 13. | 1 | 0.1 | 0.3 | 99.4 |
| Other | 14. | 2 | 0.2 | 0.6 | 100.0 |
| Unknown | 98. | 29 | 3.2 | Missing | 100.0 |
| N.A. | 99. | 539 | 59.9 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

9.8 Safety Helmet Impact Analysis

The accident performance of a motorcycle safety helmet can be evaluated by detailed examination of that accident-involved helmet. Of course, the helmet must be available for the close and detailed examination and the helmet must be disassembled so that complete details of shell and liner damage are exposed. Most of the safety helmets involved in the 900 on-scene in-depth accident cases were acquired and retained by the research teams, primarily through the offer of replacement with a new helmet from SHCA membership. These acquired helmets were completely disassembled then inspected for evidence of shell and liner performance and those data recorded. In those cases where the helmet was not acquired, disassembly was done for a few helmets, external examination and photography was done for most helmets, but some helmets simply could not be examined. Interference and limitation by attorneys was encountered often. There are significant

differences in the techniques required for thorough examination of the helmet components. The signatures of Impact on the helmet shell exterior differ with shell material and type of surface contacted. The signatures of impact on the liner surfaces differ with shell construction and liner material. Comparison of accident signatures with compliance test signatures and crash test signatures was vital to the identification of helmet performance.

The accident-involved helmet usually gave evidence of a variety of impacts, the majority of which were not life-threatening. The impacts were evaluated and only the two most severe impacts were coded for data purposes.

Table 9.8.1 show the type of impact surface for the most severe impact to the motorcycle rider helmet. A flat surface predominates and represents 87.0% of all the most severe impacts to the safety helmet. The type of material of the impacting surface shows the expected contribution of pavement (71.6%) of the accident roadway and metal (21.8%) of the involved automobile or environment.

TABLE 9.8.1. TYPE OF IMPACT SURFACE FOR MOST SEVERE HELMET IMPACT (OSIDs)

| Category Label | Cede | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--|-------|--------------------|------------------------|------------------------|
| <u>Geometry of Struck Object-Rider</u> | | | | |
| Flat | 1. | 241 | 26.8 | 87.0 |
| Blunt Edge | 2. | 15 | 1.7 | 5.4 |
| Sharp Edge | 3. | 5 | 0.6 | 1.8 |
| Blunt Object | 4. | 9 | 1.0 | 3.2 |
| Sharp Object | 5. | 7 | 0.8 | 2.5 |
| Unknown | 8. | 30 | 3.3 | Kissing |
| N.A., No Helmet or No Helmet Impact | 9. | 593 | 65.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Material of Object Struck-Rider</u> | | | | |
| Metal | 1. | 59 | 6.6 | 21.8 |
| Glass | 2. | 7 | 0.8 | 2.6 |
| Wood | 3. | 2 | 0.2 | 0.7 |
| Soil | 4. | 7 | 0.8 | 2.6 |
| Pavement | 5. | 194 | 21.6 | 71.6 |
| Other | 6. | 2 | 0.2 | 0.7 |
| Unknown | 8. | 36 | 4.0 | Missing |
| N.A., No Helmet or No Helmet Impact | 9. | 593 | 65.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

Table 9.8.2 shows the direction of impact for the first and second most severe impacts to the safety helmet. In this table, "Impact 1" is that most severe impact applied to the helmet and "Impact 2" is the second most severe impact applied to the helmet. If the impact occurred with a direct blow with

TABLE 9.8.2. **IMPACT DIRECTIONS FOR MOST SEVERE HELMET IMPACTS (OSIDs)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|---------------------------------------|-------|--------------------|------------------------|------------------------|
| <u>Type of Impact, Impact 1-rider</u> | | | | |
| Normal | 1. | 135 | 15.0 | 50.0 |
| Tangential | 2. | 131 | 14.6 | 48.5 |
| Crushing | 3. | 3 | 0.3 | 1.1 |
| Other (Snagging) | 7. | 1 | 0.1 | 0.4 |
| Unknown | 8. | 37 | 4.1 | Missing |
| N.A. | 9. | 593 | 65.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Type of Impact, Impact 2-rider</u> | | | | |
| Normal | 1. | 65 | 7.2 | 40.4 |
| Tangential | 2. | 92 | 10.2 | 57.1 |
| Crushing | 3. | 4 | 0.4 | 2.5 |
| unknown | 8. | 38 | 4.2 | Missing |
| N.A. | 9. | 701 | 77.9 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

the greatest component perpendicular to the helmet surface,, it was classified as a predominantly "normal" (or perpendicular impact). To be sure, such a **normal** impact has the prospect of transmitting the greatest threat to the head. If the impact occurred with a glancing blow with *the greatest* component tangential to the helmet surface. it was classified as predominantly "tangential" impact. In comparison to the predominantly **normal** impact, the predominantly tangential impact has the prospect of transmitting far less severe threat to the head. Table 9.8.2 shows that for the most severe "impact 1", the **normal** and tangential impacts have approximately equal contribution but it is clear that those **normal** impacts offer far greater threat. Crushing loads on the helmet were rare but involved severe forces such as impact between the motorcycle and the roadway or an automobile and the roadway. "**Impact 2**" shows less frequent impacts, and less frequent severe **normal** impacts.

Table 9.8.3 shows the number of discrete impacts on the motorcycle rider helmet at the two **most** severe impact sites. In most cases (91.1%), the **most** severe impact was a simple single critical impact at **that** location. A second - but far less severe - impact occurred at that general location in 6.3% of those same impact sites. There was **NO** case where a second impact of the same severity was super-imposed on the **original** most severe impact site. As an example, the motorcycle rider collides with the automobile and strikes the left side of his helmeted head on the windshield and header then falls to the roadway, perhaps striking the back of his helmeted head on the roadway. The two impact sites are at different locations on the helmet, the impacts are with different surfaces, and the impacts are of different severity.

TABLE 9.8.3. NUMBER OF HELMET IMPACTS ON MOTORCYCLE RIDER HELMET (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) | |
|----------------------------------|-----------|--------------------|------------------------|------------------------|--------------------------|-------|
| <u>Most severe Impact</u> | 1. | 245 | 27.2 | 91.1 | 91.1 | |
| | 2. | 17 | 1.9 | 6.3 | 97.4 | |
| | 3. | 5 | 0.6 | 1.9 | 99.3 | |
| | 4. | 2 | 0.2 | 0.7 | 100.0 | |
| | Unknown | 8. | 38 | 4.2 | Missing | 100.0 |
| N.A. | 9. | 593 | 65.9 | Missing | 100.0 | |
| | TOTAL | 900 | 100.0 | 100.0 | | |
| <u>Second Most Severe Impact</u> | 1. | 143 | 15.9 | 88.8 | 88.8 | |
| | 2. | 18 | 2.0 | 11.2 | 100.0 | |
| | Unknown | a. | 38 | 4.2 | Missing | 100.0 |
| | N.A. | 9. | 701 | 77.9 | Missing | 100.0 |
| | | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.8.4 shows the type of impact damage to the helmet shell at the **two** most severe impact sites. Of course, the more severe damage to the helmet shell is associated with the more severe impact conditions, relating the higher impact energy and greater requirement of energy absorption for impact attenuation. Delamination **is** a characteristic of fiberglass deformation and energy absorption, and is a measure of damage applicable only to fiberglass shell helmets. The helmet shell cracked, shattered and split at 1.8% of the most severe impact sites. In general, this extreme damage was related simply to the impact severity and the extreme impact forces. In a rare instance, shell fracture was related to defect and this was isolated to crazing and premature cracking of polycarbonate shell due to residual stress, e.g., crazing at retention system rivet holes.

Abrasion **was** the dominant damage **to** the shell at the two most severe impact sites, i.e., at least two-thirds of the shell damage recorded. In general, this abrasion was resisted well by the helmet shell and there were no injuries caused by any helmet failing to resist this abrasive loading. Puncture or penetration of the helmet shell was rare because such loads were resisted well. The usual result of helmet impact with a sharp edge was resistance to penetration and simply an abrasion at that location.

The impact sites on the safety helmets were located by descriptions of **clock-**face position from the top and left side of the helmet. For example, an impact site just above the right forehead would be located by **1** o'clock from the top and **10** o'clock from the left side. Table 9.8.5 shows the locations of the **two** most severe impacts to the motorcycle rider helmet with the locator as a clock-face position from a top view. Table 9.8.6 shows the locations of the two most severe impacts to the motorcycle rider helmet with the locator as a clock-face position from a left side view. Generally, those side locators in the clock-face positions of 4, 5, 6, 7, and 8 o'clock imply impacts on the helmet which are below the regions

TABLE 9.8.4. TYPE OF IMPACT DAMAGE TO RIDER HELMET SHELL (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------------|-------|--------------------|------------------------|------------------------|
| <u>Most Severe Impact</u> | | | | |
| None | 0. | 18 | 2.0 | 6.4 |
| Abrasion | 1. | 193 | 21.4 | 68.9 |
| Puncture | 2. | 2 | 0.2 | 0.7 |
| Crack, Shatter, Split | 3. | 5 | 0.6 | 1.8 |
| Delamination | 5. | 58 | 6.4 | 20.7 |
| Fire | 8. | 1 | 0.1 | 0.4 |
| Multiple | 9. | 1 | 0.1 | 0.4 |
| Other | 10. | 2 | 0.2 | 0.7 |
| Unknown | 98. | 35 | 3.9 | Missing |
| N.A. | 99. | 585 | 65.0 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |
| <u>Second Most Severe Impact</u> | | | | |
| None | 0. | 15 | 1.7 | 8.7 |
| Abrasion | 1. | 124 | 13.8 | 72.1 |
| Crack, Shatter, Split | 3. | 4 | 0.4 | 2.3 |
| Resin Fracture | 4. | 1 | 0.1 | 0.6 |
| Delamination | 5. | 25 | 2.8 | 14.5 |
| Other | 10. | 3 | 0.3 | 1.7 |
| Unknown | 98. | 39 | 4.3 | Missing |
| N.A. | 99. | 689 | 76.6 | Missing |
| | TOTAL | 900 | 100.0 | 100.0 |

of specified protection. From these data it is shown that this "below-the-belt" impact occurred in 11.5% of the most severe and 11.2% of the next most severe impacts.

Table 9.8.7 (Appendix C.5) provides a crosstabulation of locators for the rider most severe "impact 1". Table 9.8.8 (Appendix C.5) provides a crosstabulation of locators for the rider second most severe "impact 2".

Table 9.8.9 (Appendix C.5) provides a crosstabulation of locators for the passenger most severe "impact 1". Table 9.8.10 (Appendix C.5) provides a crosstabulation of locators for the passenger second most severe "impact 2".

Table 9.8.11 provides a crosstabulation of top and left side locators for the sum of all first and second most severe helmet impacts for both motorcycle riders and passengers. Table 9.8.12 illustrates the distribution of this sum of helmet impacts for the top and left side locators.

Before further consideration of these data on helmet impacts, it is important to note that these data represent only those impact sites on the helmet and do not include those impacts to the uncovered or unprotected areas of the head and

TABLE 9.8.5. IMPACT LOCATIONS ON THE MOTORCYCLE RIDER HELMET
 MOST SEVERE IMPACTS - TOP VIEW (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---|------------|--------------------|------------------------|------------------------|--------------------------|
| <u>Clock Position Top View- Most Severe Impact</u> | 1. | 22 | 2.4 | a.1 | a.1 |
| | 2. | 17 | 1.9 | 6.3 | 14.4 |
| | 3. | 17 | 1.9 | 6.3 | 20.7 |
| | 4. | 20 | 2.2 | 7.4 | 28.1 |
| | 5. | 1a | 2.0 | 6.7 | 34.8 |
| | 6. | 32 | 3.6 | 11.9 | 46.7 |
| | 7. | 25 | 2.8 | 9.3 | 55.9 |
| | a. | 26 | 2.9 | 9.6 | 65.6 |
| | 9. | 26 | 2.9 | 9.6 | 75.2 |
| | 10. | 15 | 1.7 | 5.6 | 80.7 |
| | 11. | 26 | 2.9 | 9.6 | 90.4 |
| | 12. | 26 | 2.9 | 9.6 | 100.0 |
| | Unknown | 98. | 31 | 3.4 | Missing |
| N.A. | 99. | 599 | 66.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Clock Position TOP View- Second Most Severe Impact</u> | 1. | 9 | 1.0 | 5.6 | 5.6 |
| | 2. | 7 | 0.8 | 4.3 | 9.9 |
| | 3. | 12 | 1.3 | 7.5 | 17.4 |
| | 4. | 12 | 1.3 | 7.5 | 24.8 |
| | 5. | 11 | 1.2 | 6.8 | 31.7 |
| | 6. | 24 | 2.7 | 14.9 | 46.6 |
| | 7. | 16 | 1.8 | 9.9 | 56.5 |
| | a. | 15 | 1.7 | 9.3 | 65.8 |
| | 9. | 13 | 1.4 | a.1 | 73.9 |
| | 10. | 13 | 1.4 | 8.1 | 82.0 |
| | 11. | 13 | 1.4 | 8.1 | 90.1 |
| | 12. | 16 | 1.8 | 9.9 | 100.0 |
| | Unknown | 98. | 36 | 4.0 | Missing |
| N.A. | 99. | 703 | 78.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.8.6. IMPACT LOCATIONS ON MOTORCYCLE RIDER HELMET
 MOST SEVERE IMPACTS - LEFT SIDE VIEW (OSIDs)

| Category Label | Code | Absolute requeency | Relative requeency (%) | Adjusted 'requeency (%) | Cumulative Frequency (%) |
|--|-------|-----------------------|------------------------------|-------------------------------|--------------------------------|
| <u>Clock Position Left Side View-Mast Severe Impact</u> | | | | | |
| | 1. | 40 | 4.4 | 14.8 | 14.5 |
| | 2. | 37 | 4.1 | 13.7 | 28.4 |
| | 3. | 43 | 4.8 | 15.9 | 44.3 |
| | 4. | 14 | 1.6 | 5.2 | 49.4 |
| | 5. | 1 | 0.1 | 0.4 | 49.8 |
| | 6. | 2 | 0.2 | 0.7 | 50.6 |
| | 7. | 4 | 0.4 | 1.5 | 52.0 |
| | 8. | 10 | 1.1 | 3.7 | 55.7 |
| | 9. | 7 | 0.8 | 2.6 | 58.3 |
| | 10. | 52 | 5.8 | 19.2 | 77.5 |
| | 11. | 33 | 3.7 | 12.2 | 89.7 |
| | 12. | 28 | 3.1 | 10.3 | 100.0 |
| Unknown | 98. | 35 | 3.9 | Missing | 100.0 |
| N.A. | 99. | 594 | 66.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Clock Position Left Sfde View-Second Most Severe Impact</u> | | | | | |
| | 1. | 29 | 3.2 | 18.0 | 18.0 |
| | 2. | 20 | 2.2 | 12.4 | 30.4 |
| | 3. | 31 | 3.4 | 19.3 | 49.7 |
| | 4. | 8 | 0.9 | 5.0 | 54.7 |
| | 6. | 1 | 0.1 | 0.6 | 55.3 |
| | 7. | 3 | 0.3 | 1.9 | 57.1 |
| | 8. | 6 | 0.7 | 3.7 | 60.9 |
| | 9. | 4 | 0.4 | 2.5 | 63.4 |
| | 10. | 19 | 2.1 | 11.8 | 75.2 |
| | 11. | 25 | 2.8 | 15.5 | 90.7 |
| | 12. | 15 | 1.7 | 9.3 | 100.0 |
| Unknown | 98. | 38 | 4.2 | Missing | 100.0 |
| N.A. | 99. | 701 | 77.9 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.8.11. SUM OF ALL **HELMET** IMPACT SITES

| Frequency | Top Clock Position Locator | | | | | | | | | | | | Total (Percent) | |
|---------------------------|----------------------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|-------------|-------------|--------------------|----------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | | |
| <u>Left Side</u> | 1 | 0 | 2 | 4 | 17 | 3 | 14 | 12 | 13 | 4 | 0 | 0 | 0 | 69 (15.2) |
| <u>Clock</u> | 2 | 0 | 1 | 1 | 8 | 9 | 11 | 8 | 14 | 6 | 1 | 1 | 0 | 60 (13.2) |
| <u>Position</u> | 3 | 0 | 0 | 4 | 6 | 11 | 24 | 17 | 10 | 7 | 1 | 0 | 0 | 80 (17.7) |
| <u>Locator</u> | 4 | 0 | 0 | 0 | 1 | 5 | 3 | 7 | 4 | 0 | 0 | 0 | 1 | 21 (4.6) |
| | 5 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 2 (0.4) |
| | 6 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 3 (0.7) |
| | 7 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 3 | 3 | 0 | 8 (1.8) |
| | 8 | 5 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 5 | 5 | 16 (3.5) |
| | 9 | 2 | 0 | 2 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 5 | 11 (2.4) |
| | 10 | 15 | 9 | 0 | 0 | 2 | 2 | 0 | 0 | 1 | 8 | 20 | 19 | 76 (16.8) |
| | 11 | 10 | 12 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 14 | 11 | 11 | 60 (13.2) |
| | 12 | 0 | 2 | 18 | 0 | 0 | 2 | 0 | 1 | 19 | 2 | 0 | 3 | 47 (10.4) |
| TOTAL (Percent) | | 32 (7.1) | 27 (6.0) | 32 (7.1) | 32 (7.1) | 30 (6.6) | 58 (12.8) | 45 (9.9) | 43 (9.5) | 41 (9.1) | 29 (6.4) | 40 (8.8) | 44 (9.7) | 453 (100.0) |

neck. For example, impact sites shown with a left side locator of 7 or 8 o'clock clearly represent impacts **on** the chin piece of a full facial coverage helmet. Of course, many impacts occurred to the chin, jaw, teeth, cheek, mouth, etc. of those motorcycle riders who were wearing a partial or full coverage helmet, or were not wearing any helmet at all. In addition, a motorcycle rider could experience an impact low at the back of the head and have no *helmet* impact site recorded if no helmet were in use, or if a partial coverage helmet did not extend coverage to that area. These factors must be considered when evaluating the frequency of impacts to those areas which are generally below areas of specified protection.

In these data of Table 9.8.12, the impacts below areas of traditional specified coverage **are** approximately 13.4% of the total. This has implications regarding helmet qualification since impacts clearly occur in regions which are not required to provide protection. The regions of the face acquire exposure to impact because of visual space requirements but the back of the head has no such mandatory exposure. In this way, some impact protection and coverage needs to be specified for the back of the head below current requirements.

The distribution of all impacts shows a slight lack of symmetry with a higher frequency of impacts at the left rear of the helmets. The upper rear quadrant has 39.1% of the impacts; the upper front quadrant (including the side bands at 9 o'clock) has 38.1%; the left hemisphere has almost 10% more impacts than the right hemisphere (43.4% to 33.9%).

TABLE 9.8.12. **SUMMARY** OF ALL RIDER AND PASSENGER HELMET IMPACTS (OSIDs)

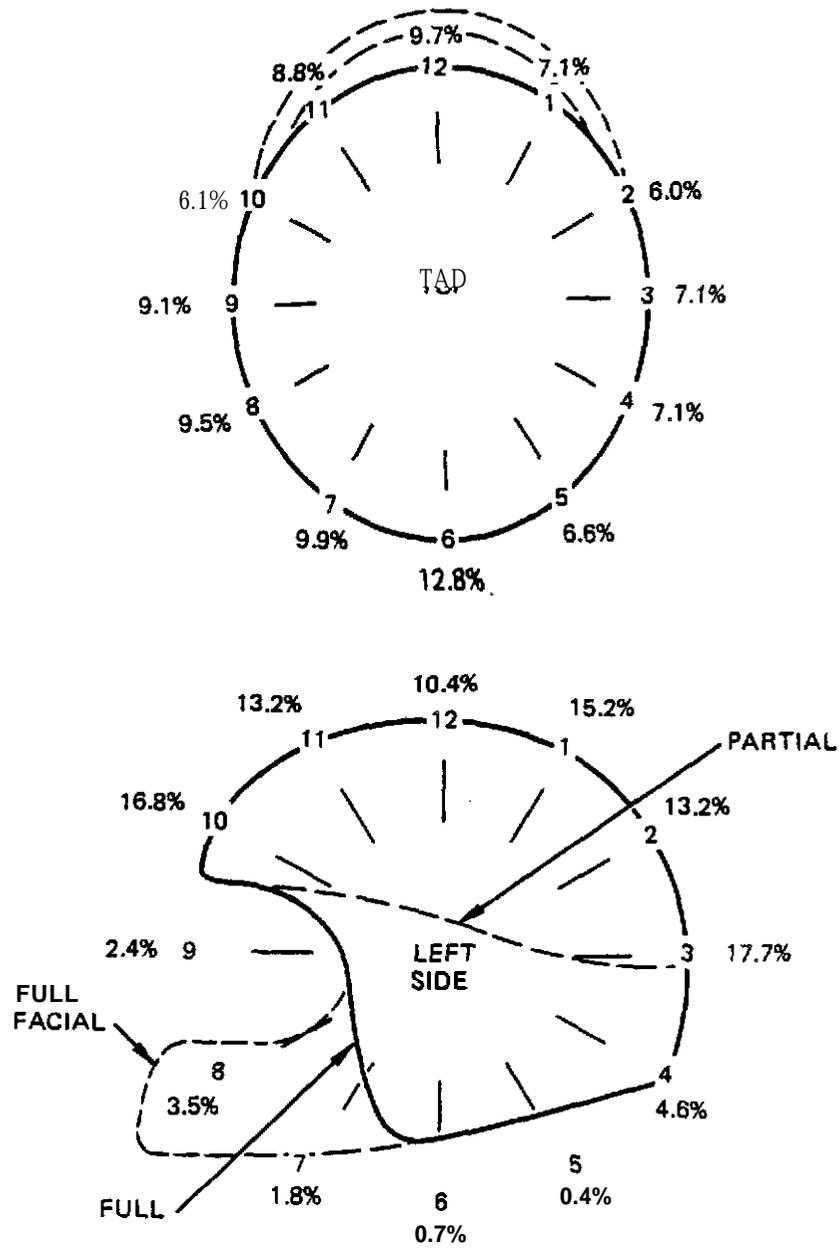


Table 9.8.13 (Appendix c.5) shows the **measured** liner crush, or **compression** permanent deformation, **at** the **two** most severe impact points on the motorcycle rider helmet. **Because** of the variation of recovery of the many different liner **materials**, it **was** difficult to relate this single measurement to **impact severity**. Only the **styrofoam** liner with low recovery gave consistent indications of impact severity.

The area of impact signature seemed to be the most reliable indicator of impact severity, since the area of liner compression could be distinguished for **most** all liner **materials**. The area measured and recorded was that area of liner loaded by impact to the shell and thereby flattened, softened, crushed, decorated, etc., so as to absorb the energy of the impact and attenuate the impact. Table 9.8.14 (Appendix C.5) shows the distribution of the impact signature areas for the two most severe impact sites for the motorcycle rider helmet. Combination of these two sets of signature areas gives the approximate cumulative frequencies:

| <u>Signature Area, in²</u> | <u>Cumulative Frequency, %</u> |
|---------------------------------------|--------------------------------|
| 6.0 | 83.7 |
| 7.0 | 88.1 |
| 8.0 | 92.0 |
| 9.0 | 94.5 |

These specific points are of concern because the conventional flat anvil drop test height of 72 inches generally produces a liner decoration and signature area between 6 and 9 **in.²** for a single drop test. Of course, this signature area is variable with shell and liner construction, as well as location on the helmet. The important point is that the single test impact approximates the 90% level of impact severity, i.e., the single **test** impact is severe enough to exceed approximately 90% of the accident impacts.

9.9 Safety Helmet Effectiveness: Head and Neck Injury Type of Lesion

Table 9.9.1 shows the type of lesion for the 861 discrete head and neck injuries experienced by the motorcycle riders in the 900 on-scene, in-depth accident cases. Recall from previous data that 39.4% of these riders were using some type of safety helmet. The overall effect of helmet use is powerful with the helmeted riders experiencing only 22.8% of all head and neck injuries. The helmeted riders show significantly lower injury frequency in all types of lesions.

Of course, there are limits to the effectiveness of safety helmets, and it is not possible to eliminate head and **neck, injury** by safety helmet use. First, it should be **obvious** that a safety helmet can not protect areas of the head and neck which are not covered. For example, the simplest function of the safety helmet is to **provide the** smooth, hard surface to prevent abrasion. According to those data of Table 9.9.1, that function was well done with the helmeted riders experiencing 17.7% of the abrasion. However, if the motorcycle rider is using a partial or full coverage helmet and slides face **down** on the pavement, facial abrasions are likely to occur on those unprotected regions. In the same circumstances, the use of the full facial coverage helmet would provide the more complete coverage and

TABLE 9.9.1. RIDER HEAD AND NECK INJURY LESION TYPE BY HELMET USE

| Count Row Pct Col Pct Tot Pct | Abrasion | Burn | Contusion | Dislocation | Fracture | Swelling | Hemorrhage | Hematoma | Concussion | Laceration | Row Total |
|--|----------|------|-----------|-------------|----------|----------|------------|----------|------------|------------|-----------|
| With Helmet | 28 | 1 | 12 | 1 | 32 | 0 | 10 | 9 | 27 | 50 | 196 |
| | 14.3 | 0.5 | 6.1 | 0.5 | 16.3 | 0.0 | 5.1 | 4.6 | 13.8 | 25.5 | 22.8 |
| | 17.7 | 50.0 | 14.3 | 50.0 | 23.7 | 0.0 | 26.3 | 20.5 | 30.3 | 24.3 | |
| | 3.3 | 0.1 | 1.4 | 0.1 | 3.7 | 0.0 | 1.2 | 1.0 | 3.1 | 5.8 | |
| Without Helmet | 130 | 1 | 71 | 1 | 102 | 4 | 28 | 35 | 62 | 156 | 663 |
| | 19.6 | 0.2 | 10.7 | 0.2 | 15.4 | 0.6 | 4.2 | 5.3 | 9.4 | 23.5 | 77.0 |
| | 82.3 | 50.0 | 84.5 | 50.0 | 75.6 | 100.0 | 73.7 | 79.5 | 69.7 | 75.7 | |
| | 15.1 | 0.1 | 8.2 | 0.1 | 11.8 | 0.5 | 3.3 | 4.1 | 7.2 | 18.1 | |
| Unknown | 0 | 0 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 2 |
| | 0.0 | 0.0 | 50.0 | 0.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.0 | 0.0 | 1.2 | 0.0 | 0.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.1 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 158 | 2 | 84 | 2 | 135 | 4 | 38 | 44 | 89 | 206 | 861 |
| | 18.4 | 0.2 | 9.8 | 0.2 | 15.7 | 0.5 | 4.4 | 5.1 | 10.3 | 23.9 | 100.0 |

| Count Row Pct Col Pct Tot Pct | Amputation | Crushing | Other | Pain | Maceration | Rupture | Sprain | Herniation | Unknown | Avulsion | Row Total |
|--|------------|----------|-------|------|------------|---------|--------|------------|---------|----------|-----------|
| With Helmet | 0 | 0 | 1 | 21 | 0 | 0 | 2 | 0 | 0 | 2 | 196 |
| | 0.0 | 0.0 | 0.5 | 10.7 | 0.0 | 0.0 | 1.0 | 0.0 | 0.0 | 1.0 | 22.8 |
| | 0.0 | 0.0 | 100.0 | 34.4 | 0.0 | 0.0 | 20.0 | 0.0 | 0.0 | 16.7 | |
| | 0.0 | 0.0 | 0.1 | 2.4 | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.2 | |
| Without Helmet | 2 | 3 | 0 | 40 | 4 | 4 | 8 | 1 | 1 | 10 | 663 |
| | 0.3 | 0.5 | 0.0 | 6.0 | 0.6 | 0.6 | 1.2 | 0.2 | 0.2 | 1.5 | 77.0 |
| | 100.0 | 100.0 | 0.0 | 65.6 | 100.0 | 100.0 | 80.0 | 100.0 | 100.0 | 83.3 | |
| | 0.2 | 0.3 | 0.0 | 4.6 | 0.5 | 0.5 | 0.9 | 0.1 | 0.1 | 1.2 | |
| Unknown | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 2 | 3 | 1 | 61 | 4 | 4 | 10 | 1 | 1 | 12 | 861 |
| | 0.2 | 0.3 | 0.1 | 7.1 | 0.5 | 0.5 | 1.2 | 0.1 | 0.1 | 1.4 | 100.0 |

eliminate such facial abrasions. Essentially the same situation is true for all of the other lesions of high frequency, i.e., contusion, fracture, hemorrhage, **hematoma**, concussion, laceration and **avulsion**. An exception was pain, which was a **diffused, non-specific complaint** typical of all accident-involved motorcycle riders.

Because of the frontal orientation of the motorcycle crash impact, there is the threat of facial impact and many facial injuries were experienced by both unhelmeted and helmeted riders. In this regard, the expectation of facial injury in the motorcycle accident would be essentially the same for helmeted and unhelmeted riders, unless the helmet was full facial coverage thereby offering some protection to the facial regions.

Another factor related to helmet coverage is a comparison of the partial and full coverage helmets. The partial coverage helmet leaves a large area of the temporal and occipital regions exposed without coverage. Impacts do occur in these areas, and injuries result where there is no coverage and no protection. There is no adverse effect regarding hearing, surely no relation to the visual field, and a definite advantage of protection by including that additional coverage offered by the full coverage helmet.

A final limit to the effectiveness of the safety helmets in these accident data is the extreme severity of the motorcycle accidents. Consider some of the following most severe motorcycle accidents investigated in this research:

- (1) Rider face-first into a power pole at 34 mph.
- (2) Rider run-over, snagged and dragged underneath an automobile on the freeway.
- (3) Rider crushed between tumbling 700 lb. motorcycle and concrete curb.
- (4) Rider head first into a concrete curb at 28 mph.
- (5) Rider head first into an automobile windshield at a relative speed of 40 mph.
- (6) Rider head first into posts and **Armco** barrier at 44 mph.
- (7) Rider frontal impact on side of VW at 38 mph.

These extreme conditions present a formidable problem for head protection and the expectations of survival must have physical and practical limitations. However, contemporary helmets often provide spectacular results, i.e., incredibly, cases 2, 4, and 5 involved helmeted riders who survived those severe accident circumstances with only minor head and neck injuries.

These data show a special advantage to the motorcycle rider wearing a safety helmet. The helmet reduces or prevents most of the injury to protected regions, but does not exclude injury to unprotected regions or injury in very severe accident configurations.

Table 9.9.2 shows the type of lesion for the 136 discrete head and neck injuries experienced by the passengers in the 900 on-scene, in-depth accident cases. Recall from previous data that 15.9% of these passengers were using some type of safety helmet. The overall effect of helmet use is powerful, with the helmeted passengers experiencing only 9.6% of all head and neck injuries. **These** helmeted passengers show significantly lower injury frequency in all types of lesions.

TABLE 9.9.2. PASSENGER HEAD AND NECK INJURY LESION TYPE BY HELMET USE (OSIDs)

| Count Row Pct Col Pct Tot Pct | Abrasion | Contusion | Fracture | Hemorrhage | Hematoma | Concussion | Laceration | Pain | Sprain | Avulsion | Row Total |
|--|----------------------------|----------------------------|----------------------------|-------------------------|--------------------------|----------------------------|----------------------------|--------------------------|--------------------------|--------------------------|--------------|
| With Helmet | 4 30.8 14.8 2.9 | 1 7.7 5.0 0.7 | 1 7.7 5.9 0.7 | 1 7.7 12.5 0.7 | 0 0.0 0.0 0.0 | 3 23.1 16.7 2.2 | 2 15.4 8.0 1.5 | 1 7.7 9.1 0.7 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 13 9.6 |
| Without Helmet | 23 18.7 85.2 16.9 | 19 15.4 95.0 14.0 | 16 13.0 94.1 11.8 | 7 5.7 87.5 5.1 | 8 6.5 100.0 5.9 | 15 12.2 83.3 11.0 | 23 18.7 92.0 16.9 | 10 8.1 90.9 7.4 | 1 0.8 100.0 0.7 | 1 0.8 100.0 0.7 | 123 90.4 |
| Column Total | 27 19.9 | 20 14.7 | 17 12.5 | 8 5.9 | 8 5.9 | 18 13.2 | 25 18.4 | 11 8.1 | 1 0.7 | 1 0.7 | 136 100.0 |

As with the motorcycle rider head and neck injury analysis, helmet coverage essentially excluded injury to protected regions. The head and neck injuries experienced by helmeted passengers were injuries to unprotected regions or occurred in accident configurations of extreme severity.

9.10 Safety Helmet Effectiveness: Head and Neck Injury Severity

Table 9.10.1 shows the severity of the 861 discrete head and neck injuries experienced by the motorcycle riders in the 900 on-scene, in-depth accident cases. Recall that 39.4% of these riders were using some type of **safety** helmet. These data show that the helmeted riders have significantly lower injury frequency at all levels of injury severity.

TABLE 9.10.1. RIDER **HEAD** AND NECK INJURY SEVERITY BY HELMET USE (OSIDs)

| Count Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Serious | Critical | Fatal | Unknown | Row Total |
|--|-------|----------|--------|---------|----------|-------|---------|--------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 8 | |
| With Helmet | 134 | 27 | 12 | 7 | 10 | 6 | 0 | 196 |
| | 68.4 | 13.8 | 6.1 | 3.6 | 5.1 | 3.1 | 0.0 | 22.8 |
| | 23.4 | 24.1 | 16.2 | 23.3 | 20.4 | 26.1 | 0.0 | |
| | 15.6 | 3.1 | 1.4 | 0.8 | 1.2 | 0.7 | 0.0 | |
| Without Helmet | 437 | a4 | 62 | 23 | 39 | 17 | 1 | 663 |
| | 65.9 | 12.7 | 9.4 | 3.5 | 5.9 | 2.6 | 0.2 | 77.0 |
| | 76.4 | 75.0 | 63.6 | 76.7 | 79.6 | 73.9 | 100.0 | |
| | 50.8 | 9.8 | 7.2 | 2.7 | 4.5 | 2.0 | 0.1 | |
| Unknown | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 2 |
| | 50.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 |
| | 0.2 | 0.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 572 | 112 | 74 | 30 | 49 | 23 | 1 | 861 |
| | 66.4 | 13.0 | a.6 | 3.5 | 5.7 | 2.7 | 0.1 | 100.0 |

Table 9.10.2 shows the severity of the 136 discrete head and neck injuries experienced by the passengers in the 900 on-scene, in-depth accident cases. Recall that 15.9% of these passengers were using some type of safety helmet. These data show that the helmeted passengers have significantly lower injury frequency at all levels of injury severity.

9.11 Safety Helmet Effectiveness: Overall Severities Sum (SS) and Head and Neck Severities Sum (SS2)

Table 9.11.1 (Appendix C.5) shows the overall Severities Sum (SS)^{*} for the motorcycle riders in the 900 on-scene, in-depth accident cases. These overall Severities Sums are obtained from the addition of the somatic severities sum (SS1) and the head and neck severities sum (SS2). The overall severities sum is **cross-**tabulated with the type of helmet coverage.

*N.B. All "Severities Sums" are in fact sums of the individual injury severities squared.

TABLE 9.10.2. PASSENGER HEAD AND NECK INJURY SEVERITY BY HELMET USE (OSIDs)

| Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | ROW Total |
|--|----------------------------|--------------------------|-------------------------------|-------------------------------|-------------------------------|--------------|
| With Helmet | 11 84.6 11.3 8.1 | 1 7.7 8.3 0.7 | 1 7.7 7.7 0.7 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 13 9.6 |
| Without Helmet | 86 69.9 88.7 63.2 | 11 8.9 91.7 8.1 | 12 9.8 92.3 8.8 | 1 0.8 100.0 0.7 | 13 10.6 100.0 9.6 | 123 90.4 |
| Column Total | 97 71.3 | 12 8.8 | 13 9.6 | 1 0.7 | 13 9.6 | 136 100.0 |

Table 9.11.2 (Appendix C.5) shows the head and neck severities sum (SS2) crosstabulated with the type of helmet coverage.

Table 9.11.3 (Appendix C.5) provides the head and neck severities sum (SS2) for the 54 fatal accidents for comparison. The fatally injured motorcycle riders wearing helmets are approximately one-fourth of the fatalities at all levels of head and neck severities sum (SS2).

The data of Table 9.11.1 do not distinguish the advantages of helmet use as concisely as do the data of Table 9.11.2. When the data of Table 9.11.2 are summarized, there is a special **measure** of helmet effectiveness, and these results are shown in Table 9.11.4.

The effectiveness of helmets in the 900 **cases** of on-scene, in-depth investigations is illustrated by the criterion of **NO** head and neck injury, i.e., SS2 = 0. Table 9.11.4(A) shows the data for the helmeted and **unhelmeted** riders with NO head and neck Injury. The significance of these data is extremely high and shows that a very high level of head and neck protection from all injuries is afforded to those helmeted motorcycle riders.

Table 9.11.4(B) utilizes the criterion of head and neck injuries which exceed the severities sum of 10, i.e., SS2 \geq 10. For purposes of comparison, a cerebral concussion which causes unconsciousness for a period of one hour would have AIS = 3 or SS2 = 9. The boundary of SS2 = 10 represents the fact that helmeted riders receive a high level of head and neck protection from severe injuries.

Table 9.11.4(C) utilizes the criterion of head and neck injuries which exceed the severities **sum** of 25, i.e., SS2 \geq 25. For purposes of comparison, a temporal bone skull fracture with hemorrhage would have AIS = 5, or SS2 = 25.

TABLE 9.11.4. HELMET EFFECTIVENESS AT VARIOUS LEVELS OF HEAD AND NECK SEVERITY SUM, SS2 (OSIDs)

| | | | |
|------------------------------------|--------------------|-------------------|--------------|
| A) At the level of <u>SS2 = 0</u> | | | |
| | <u>SS2 = 0</u> | <u>SS2 > 0</u> | <u>TOTAL</u> |
| Helmet | 245 | 97 | 342 |
| No Helmet | 247 | 284 | 536 |
| TOTAL | 492 | 386 | 878 |
| | $(\chi^2 = 54.3)$ | | |
| B) At the level of <u>SS2 = 10</u> | | | |
| | <u>SS2 < 10</u> | <u>SS2 ≥ 10</u> | <u>TOTAL</u> |
| Helmet | 325 | 17 | 342 |
| No Helmet | 473 | 63 | 536 |
| TOTAL | 798 | 80 | 878 |
| | $(\chi^2 = 10.8)$ | | |
| C) At the level of <u>SS2 = 25</u> | | | |
| | <u>SS2 < 25</u> | <u>SS2 ≥ 25</u> | <u>TOTAL</u> |
| Helmet | 330 | 12 | 342 |
| No Helmet | 492 | 44 | 536 |
| TOTAL | 822 | 56 | 878 |
| | $(\chi^2 = 6.96)$ | | |
| D) At the level of <u>SS2 = 50</u> | | | |
| | <u>SS2 < 50</u> | <u>SS2 ≥ 50</u> | <u>TOTAL</u> |
| Helmet | 337 | 5 | 342 |
| No Helmet | 571 | 25 | 536 |
| TOTAL | 848 | 30 | 878 |
| | $(\chi^2 = 5.55)$ | | |

This boundary of SS2 = 25 represents the border of critical, probably severe impairment, and possibly fatal head and neck injury. The data of Table 9.11.4(C) are significant and represent the fact that helmeted riders receive a high level of head and neck protection from critical and possibly fatal injuries.

Table 9.11.4(D) utilizes the criterion of head and neck injuries which exceed the severities sum of 50, i.e., SS2 ≥ 50. For purposes of comparison, this severities sum represents a clearly fatal head and neck injury. The data of Table 9.11.4(D) are significant and represent the fact that helmeted riders receive a high level of head and neck protection from clearly fatal injuries.

These **summaries** of data in Table 9.11.4 depict the entire spectrum of advantage for safety helmet use. It is clear that the safety helmets provide significant protection at all levels of head and neck injury **severity**.

Unfortunately, these data do not distinguish the special effects of helmet type or helmet coverage. The partial, full, and full facial coverage helmets participate at all levels of head and neck injury severity with approximately the same distribution.

9.12 Safety Helmet Effectiveness: Head and Neck Injury Region

Table 9.12.1 shows the 195 discrete head and neck injuries identified with the helmeted riders in the 900 on-scene, in-depth accident cases. Table 9.12.2 shows the 663 discrete head and neck injuries identified with the unhelmeted riders in that same group of 900 accident cases.

These data confirm expected differences in injury region and severity between the helmeted and **unhelmeted** riders. The typical regions of helmet coverage would lead to expectations of relatively lower injury frequencies in the following regions:

Frontal (10.3% vs. 14.9%)

Orbit (**3.6%** vs. 6.0%)

Occipital (3.1% vs. **6.8%**)

Parietal (2.6% vs. 8.4%)

Temporal (2.6% vs. 5.9%)

Also, these data confirm expected similarities in injury region and severity since the **eyespace** opening in any helmet allows exposure to the following areas:

Nasal (5.6% vs. 5.6%)

Maxilla (4.1% vs. 4.8%)

Zygoma (6.7% vs. 4.5%)

Tables 9.12.3 and 9.12.4 show the equivalent crosstabulations of head and neck injury region and severity for the helmeted and unhelmeted passengers. The limited frequency of helmeted passenger injuries to the head and neck regions does not provide an equivalent comparison for helmet benefit to particular areas. However, there is favorable comparison between unhelmeted passengers and unhelmeted riders, with the unprotected areas suffering high exposure and high injury frequency.

TABLE 9.12.1. RIDER HEAD AND NECK INJURY SEVERITY BY INJURY REGION:
HELMETED RIDERS (OSIDs)

| | count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | severe 3 | serious 4 | Critical 5 | Fatal 6 | Row Total |
|-------------------------|--|------------|---------------|-------------|--------------|---------------|------------|--------------|
| | | | | | | | | |
| B | 0 | 0 | 6 | 2 | 3 | 2 | 13 | |
| Basal | 0.0 | 0.0 | 46.2 | 15.4 | 23.1 | 15.4 | 6.7 | |
| | 0.0 | 0.0 | 50.0 | 28.6 | 33.3 | 33.3 | | |
| | 0.0 | 0.0 | 3.1 | 1.0 | 1.5 | 1.0 | | |
| C | 24 | 1 | 1 | 0 | 0 | 0 | 26 | |
| Cervical-General | 92.3 | 3.8 | 3.8 | 0.0 | 0.0 | 0.0 | 13.3 | |
| | 17.9 | 3.7 | 8.3 | 0.0 | 0.0 | 0.0 | | |
| | 12.3 | 0.5 | 0.5 | 0.0 | 0.0 | 0.0 | | |
| F | 18 | 1 | 0 | 1 | 0 | 0 | 20 | |
| Frontal | 90.0 | 5.0 | 0.0 | 5.0 | 0.0 | 0.0 | 10.3 | |
| | 13.4 | 3.7 | 0.0 | 14.3 | 0.0 | 0.0 | | |
| | 9.2 | 0.5 | 0.0 | 0.5 | 0.0 | 0.0 | | |
| K | 8 | 1 | 0 | 0 | 0 | 0 | 9 | |
| Pace-General | 88.9 | 11.1 | 0.0 | 0.0 | 0.0 | 0.0 | 4.6 | |
| | 6.0 | 3.7 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.1 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| M | 26 | 5 | 0 | 0 | 0 | 0 | 31 | |
| Mandible | 83.9 | 16.1 | 0.0 | 0.0 | 0.0 | 0.0 | 15.9 | |
| | 19.4 | 18.5 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 13.3 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| N | 9 | 2 | 0 | 0 | 0 | 0 | 11 | |
| Nasal | 81.8 | 18.2 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 | |
| | 6.7 | 7.4 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.6 | 1.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| O | 3 | 0 | 2 | 0 | 1 | 0 | 6 | |
| Occipital | 50.0 | 0.0 | 33.3 | 0.0 | 16.7 | 0.0 | 3.1 | |
| | 2.2 | 0.0 | 16.7 | 0.0 | 11.1 | 0.0 | | |
| | 1.5 | 0.0 | 1.0 | 0.0 | 0.5 | 0.0 | | |
| P | 2 | 1 | 0 | 1 | 0 | 1 | 5 | |
| Parietal | 40.0 | 20.0 | 0.0 | 20.0 | 0.0 | 20.0 | 2.6 | |
| | 1.5 | 3.7 | 0.0 | 14.3 | 0.0 | 16.7 | | |
| | 1.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | | |
| Q | 12 | 11 | 2 | 1 | 5 | 1 | 32 | |
| Brain-General | 37.5 | 34.4 | 6.3 | 3.1 | 15.6 | 3.1 | 16.4 | |
| | 9.0 | 40.7 | 16.7 | 14.3 | 55.6 | 1b.? | | |
| | 6.2 | 5.6 | 1.0 | 0.5 | 2.6 | 0.5 | | |
| R | 7 | 0 | 0 | 0 | 0 | 0 | 7 | |
| Orbit | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.6 | |
| | 5.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 134 | 27 | 12 | 7 | 9 | 6 | 195 | |
| | 68.7 | 13.8 | 6.2 | 3.6 | 4.6 | 3.1 | 100.0 | |

Continued

TABLE 9.12.1 (continued)

| | Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Row Total. |
|-------------------------|--|--------------------------|--------------------------|--------------------------|---------------------------|------------------------|---------------------------|---------------|
| S Sphenoid | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 100.0 14.3 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 0.5 |
| T Temporal | 5 .00.0 3.7 2.6 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 5 2.6 |
| W whole Region | 1 .00.0 0.7 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0.: |
| X Maxilla | 7 87.5 5.2 3.6 | 1 12.5 3.7 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 8 4.1 |
| Y Throat | 1 33.3 0.7 0.5 | 1 33.3 3.7 0.5 | 0 0.0 0.0 0.0 | 1 33.3 14.3 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 1.5 |
| Z Zygoma | 10 76.9 7.5 5.1 | 3 23.1 11.1 1.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 13 6.7 |
| 1 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 .00.0 33.3 1.0 | 2 1.0 |
| 2 Cervical Vertebra | 1 .00.0 0.7 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 0.5 |
| 7 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 100.0 a.3 0.5 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 0.5 |
| Column Total | 134 68.7 | 27 13.8 | 12 6.2 | 7 3.6 | 9 4.6 | 6 3.1 | 195 100.0 | |

TABLE 9.12.2. RIDER HEAD AND NECK INJURY SEVERITY BY INJURY REGION:
UNHELMETED RIDERS (OSIDs)

| Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Unknown 8 | Row Total |
|--|-------------|---------------|-------------|--------------|---------------|------------|--------------|--------------|
| B | 0 | 0 | 16 | 4 | 5 | 1 | 0 | 26 |
| Basal | 0.0 | 0.0 | 61.5 | 15.4 | 19.2 | 3.8 | 0.0 | 3.9 |
| | 0.0 | 0.0 | 25.8 | 17.4 | 12.8 | 5.9 | 0.0 | |
| | 0.0 | 0.0 | 2.4 | 0.6 | 0.8 | 0.2 | 0.0 | |
| C | 49 | 1 | 1 | 0 | 2 | 2 | 0 | 55 |
| Cervical-General | 89.1 | 1.8 | 1.8 | 0.0 | 3.6 | 3.6 | 0.0 | 8.3 |
| | 11.2 | 1.2 | 1.6 | 0.0 | 5.1 | 11.8 | 0.0 | |
| | 7.4 | 0.2 | 0.2 | 0.0 | 0.3 | 0.3 | 0.0 | |
| F | 84 | 4 | 0 | 4 | 3 | 4 | 0 | 99 |
| Frontal | 84.8 | 4.0 | 0.0 | 4.0 | 3.0 | 6.0 | 0.0 | 14.9 |
| | 19.2 | 4.8 | 0.0 | 17.4 | 7.7 | 23.5 | 0.0 | |
| | 12.7 | 0.6 | 0.0 | 0.6 | 0.5 | 0.6 | 0.0 | |
| H | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 |
| Foramen Magnum | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.2 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.9 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | |
| K | 38 | 1 | 0 | 0 | 0 | 0 | 0 | 39 |
| Pace-General | 97.4 | 2.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.9 |
| | a.7 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 5.7 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| M | 52 | 12 | 4 | 0 | 0 | 0 | 0 | 68 |
| Mandible | 76.5 | 17.6 | 5.9 | 0.0 | 0.0 | 0.0 | 0.0 | 10.3 |
| | 11.9 | 14.3 | 6.5 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 7.8 | 1.8 | 0.6 | 0.0 | 0.0 | 0.0 | 0.0 | |
| N | 31 | 6 | 0 | 0 | 0 | 0 | 0 | 37 |
| Nasal | 83.8 | 16.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.6 |
| | 7.1 | 7.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.7 | 0.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| O | 2s | 5 | 7 | 1 | 7 | 0 | 0 | 45 |
| Occipital | 55.6 | 11.1 | 15.6 | 2.2 | 15.6 | 0.0 | 0.0 | 6.8 |
| | 5.7 | 6.0 | 11.3 | 4.3 | 17.9 | 0.0 | 0.0 | |
| | 3.0 | 0.8 | 1.1 | 0.2 | 1.1 | 0.0 | 0.0 | |
| P | 25 | 13 | 8 | 4 | 5 | 1 | 0 | 56 |
| Parietal | 44.6 | 23.2 | 14.3 | 7.1 | 8.9 | 1.8 | 0.0 | a.4 |
| | 5.7 | 15.5 | 12.9 | 17.4 | 12.8 | 5.9 | 0.0 | |
| | 3.8 | 2.0 | 1.2 | 0.6 | 0.8 | 0.2 | 0.0 | |
| Q | 19 | 24 | 10 | 3 | 12 | 3 | 0 | 71 |
| Brain-General | 26.8 | 33.8 | 14.1 | 4.2 | 16.9 | 4.2 | 0.0 | 10.7 |
| | 4.3 | 28.6 | 16.1 | 13.0 | 30.8 | 17.6 | 0.0 | |
| | 2.9 | 3.6 | 1.5 | 0.5 | 1.8 | 0.5 | 0.0 | |
| R | 32 | 3 | 5 | 0 | 0 | 0 | 0 | 40 |
| Orbit | 80.0 | 7.5 | 12.5 | 0.0 | 0.0 | 0.0 | 0.0 | 6.0 |
| | 7.3 | 3.6 | 8.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.8 | 0.5 | 0.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 437 | a4 | 62 | 23 | 39 | 17 | 1 | 663 |
| | 65.9 | 12.7 | 9.4 | 3.5 | 5.9 | 2.6 | 0.2 | 100.0 |

Continued

TABLE 9.12.1 (continued)

| | Count Row Pct Col Pct Tot PCE | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Unknown 8 | Row Total |
|--------------------------|--|------------|---------------|-------------|--------------|---------------|------------|--------------|--------------|
| T | 22 | 5 | 4 | 4 | 3 | 1 | 0 | 39 | |
| Temporal | 56.4 | 12.8 | 10.3 | 10.3 | 7.7 | 2.6 | 0.0 | 5.9 | |
| | 5.0 | 6.0 | 6.5 | 17.4 | 7.7 | 5.9 | 0.0 | | |
| | 3.3 | 0.8 | 0.6 | 0.6 | 0.5 | 0.2 | 0.0 | | |
| U | 4 | 1 | 0 | 2 | 0 | 0 | 1 | 8 | |
| Unknown | 50.0 | 12.5 | 0.0 | 25.0 | 0.0 | 0.0 | 12.5 | 1.2 | |
| | 0.9 | 1.2 | 0.0 | 8.7 | 0.0 | 0.0 | 100.0 | | |
| | 0.6 | 0.2 | 0.0 | 0.3 | 0.0 | 0.0 | 0.2 | | |
| W | 1 | 0 | 0 | 1 | 0 | 1 | 0 | 3 | |
| Whole Region | 33.3 | 0.0 | 0.0 | 33.3 | 0.0 | 33.3 | 0.0 | 0.5 | |
| | 0.2 | 0.0 | 0.0 | 4.3 | 0.0 | 5.9 | 0.0 | | |
| | 0.2 | 0.0 | 0.0 | 0.2 | 0.0 | 0.2 | 0.0 | | |
| X | 25 | 7 | 0 | 0 | 0 | 0 | 0 | 32 | |
| Maxilla | 78.1 | 21.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.8 | |
| | 5.7 | 8.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.8 | 1.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Y | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 3 | |
| Throat | 33.3 | 33.3 | 33.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.5 | |
| | 0.2 | 1.2 | 1.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.2 | 0.2 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Z | 29 | 1 | 0 | 0 | 0 | 0 | 0 | 30 | |
| Zygoma | 96.7 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.5 | |
| | 6.6 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 4.4 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 1 | 0 | 0 | 1 | 0 | 2 | 3 | 0 | 6 | |
| cervical Vertebra | 0.0 | 0.0 | 16.7 | 0.0 | 33.3 | 50.0 | 0.0 | 0.9 | |
| | 0.0 | 0.0 | 1.6 | 0.0 | 5.1 | 17.6 | 0.0 | | |
| | 0.0 | 0.0 | 0.2 | 0.0 | 0.3 | 0.5 | 0.0 | | |
| 2 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 1 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | |
| | 0.0 | 0.0 | 1.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 5 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | |
| | 0.0 | 0.0 | 3.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| 6 | 0 | 0 | 2 | 0 | 0 | 0 | 0 | 2 | |
| Cervical Vertebra | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | |
| | 0.0 | 0.0 | 3.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.0 | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 437 | 84 | 62 | 23 | 39 | 2.6 | 1 | 663 | |
| | 65.9 | 12.7 | 9.4 | 3.5 | 5.9 | | 0.2 | 100.0 | |

TABLE 9.12.3. PASSENGER HEAD AND NECK INJURY SEVERITY BY INJURY REGION:
HELMETED PASSENGERS (OSIDs)

| | Count Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Row |
|------------------|--|-------|----------|--------|-------|
| | | 1 | 2 | 3 | Coral |
| C | 1 | 0 | 0 | 1 | 1 |
| Cervical-General | 100.0 | 0.0 | 0.0 | 0.0 | 7.7 |
| | 9.1 | 0.0 | 0.0 | 0.0 | |
| | 7.7 | 0.0 | 0.0 | 0.0 | |
| F | 1 | 0 | 0 | 1 | 1 |
| Frontal | 100.0 | 0.0 | 0.0 | 0.0 | 7.7 |
| | 9.1 | 0.0 | 0.0 | 0.0 | |
| | 7.7 | 0.0 | 0.0 | 0.0 | |
| K | 1 | 0 | 0 | 1 | 1 |
| Face-General | 100.0 | 0.0 | 0.0 | 0.0 | 7.7 |
| | 9.1 | 0.0 | 0.0 | 0.0 | |
| | 7.7 | 0.0 | 0.0 | 0.0 | |
| M | 3 | 0 | 0 | 3 | 3 |
| Mandible | 100.0 | 0.0 | 0.0 | 0.0 | 23.1 |
| | 27.3 | 0.0 | 0.0 | 0.0 | |
| | 23.1 | 0.0 | 0.0 | 0.0 | |
| N | 2 | 0 | 0 | 2 | 2 |
| Nasal | 100.0 | 0.0 | 0.0 | 0.0 | 15.4 |
| | 18.2 | 0.0 | 0.0 | 0.0 | |
| | 15.4 | 0.0 | 0.0 | 0.0 | |
| P | 1 | 0 | 0 | 1 | 1 |
| Parietal | 100.0 | 0.0 | 0.0 | 0.0 | 7.1 |
| | 9.1 | 0.0 | 0.0 | 0.0 | |
| | 7.7 | 0.0 | 0.0 | 0.0 | |
| Q | 1 | 1 | 1 | 3 | 3 |
| Brain-General | 33.3 | 33.3 | 33.3 | 0.0 | 23.1 |
| | 9.1 | 100.0 | 100.0 | 0.0 | |
| | 7.7 | 7.7 | 7.7 | 0.0 | |
| R | 1 | 0 | 0 | 1 | 1 |
| Orbit | 100.0 | 0.0 | 0.0 | 0.0 | 7.7 |
| | 9.1 | 0.0 | 0.0 | 0.0 | |
| | 7.7 | 0.0 | 0.0 | 0.0 | |
| Column Total | 11 | 1 | 1 | 13 | 13 |
| | 84.6 | 7.7 | 7.7 | 00.0 | 00.0 |

TABLE 9.12.4, PASSENGER HEAD AND NECK INJURY SEVERITY BY INJURY REGION:
UNHELMETED PASSENGERS (OSIDs)

| | Count | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Row Total |
|------------------|-------------------------------|------------|---------------|-------------|--------------|---------------|--------------|
| | Row Pct Col Pct Tot Pct | | | | | | |
| B | 0 | 0 | 0 | 6 | 0 | 1 | 7 |
| Basal | 0.0 | 0.0 | 0.0 | 85.7 | 0.0 | 14.3 | 5.7 |
| | 0.0 | 0.0 | 0.0 | 50.0 | 0.0 | 7.7 | |
| | 0.0 | 0.0 | 4.9 | 0.0 | 0.8 | | |
| C | 9 | 0 | 0 | 0 | 0 | 0 | 9 |
| Cervical-General | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 7.3 |
| | 10.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 7.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| F | 19 | 0 | 0 | 0 | 0 | 1 | 20 |
| Frontal | 95.0 | 0.0 | 0.0 | 0.0 | 0.0 | 5.0 | 16.3 |
| | 22.1 | 0.0 | 0.0 | 0.0 | 0.0 | 7.7 | |
| | 15.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.8 | |
| K | 6 | 0 | 0 | 0 | 0 | 0 | 6 |
| Face-General | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 |
| | 7.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| M | 6 | 0 | 0 | 0 | 0 | 0 | 6 |
| Mandible | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 |
| | 7.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 4.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| N | 3 | 1 | 0 | 0 | 0 | 0 | 4 |
| Nasal | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.3 |
| | 3.5 | 9.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.4 | 0.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| O | 9 | 2 | 3 | 0 | 0 | 1 | 15 |
| Occipital | 60.0 | 13.3 | 20.0 | 0.0 | 0.0 | 6.7 | 12.2 |
| | 10.5 | 18.2 | 25.0 | 0.0 | 7.7 | | |
| | 7.3 | 1.6 | 2.4 | 0.0 | 0.8 | | |
| P | 7 | 1 | 0 | 0 | 0 | 1 | 9 |
| Parietal | 77.8 | 11.1 | 0.0 | 0.0 | 0.0 | 11.1 | 7.3 |
| | 8.1 | 9.1 | 0.0 | 0.0 | 7.7 | | |
| | 5.7 | 0.8 | 0.0 | 0.0 | 0.8 | | |
| Q | 6 | 6 | 2 | 1 | 9 | | 24 |
| Brain-General | 25.0 | 25.0 | 8.3 | 4.2 | 37.5 | | 19.5 |
| | 7.0 | 54.5 | 16.7 | 100.0 | 69.2 | | |
| | 4.9 | 4.9 | 1.6 | 0.8 | 7.3 | | |
| R | 9 | 0 | 1 | 0 | 0 | | 10 |
| Orbit | 90.0 | 0.0 | 10.0 | 0.0 | 0.0 | | 8.1 |
| | 10.5 | 0.0 | 8.3 | 0.0 | 0.0 | | |
| | 7.3 | 0.0 | 0.8 | 0.0 | 0.0 | | |
| T | 2 | 0 | 0 | 0 | 0 | | 2 |
| Temporal | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 1.6 |
| | 2.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 1.6 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| U | 3 | 0 | 0 | 0 | 0 | | 3 |
| Unknown | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 2.4 |
| | 3.5 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 2.4 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| X | 4 | 0 | 0 | 0 | 0 | | 4 |
| Maxilla | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | | 3.3 |
| | 4.7 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Z | 3 | 1 | 0 | 0 | 0 | | 4 |
| Zygoma | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | | 3.3 |
| | 3.5 | 9.1 | 0.0 | 0.0 | 0.0 | | |
| | 2.4 | 0.8 | 0.0 | 0.0 | 0.0 | | |
| Column Total | 86 69.9 | 11 8.9 | 12 9.8 | 1 0.8 | 13 10.6 | 123 100.0 | |

9.13 Safety Helmet Effectiveness: Neck Only Injury Severity

Table 9.13.1a shows the crosstabulation of neck only injury severity and helmet use for the 102 neck injuries experienced by the motorcycle riders in the 900 on-scene, in-depth accident cases. The motorcycle riders wearing helmets were 39.8% of the accident-involved riders but these riders accounted for less than their share of neck injuries, 32.4%. This distribution of neck injuries does not provide statistical significance of this favorable effect but it is clear that there is no liability for helmet use. These data simply confirm that there is no world-shaking advantage or disadvantage of motorcycle helmet use in relation to neck injury.

Table 9.13.1b shows the very limited data on neck only injury severity and helmet use for the accident-involved passengers. Of course, these sparse data do not confirm advantage or disadvantage to helmet use related to neck injury.

Neck injury for motorcycle riders (and passengers) seems to be closely associated with head impact. For example, the motorcycle accident victim often falls headfirst to the roadway, making contact with the left shoulder and left side of the head. The impact of the left side of the head can cause lateral **flexion** or extension displacement of the neck with the prospect of related neck injury. In this situation, there are competing factors when a safety helmet is involved. Any safety helmet which attenuates head impact and reduces the linear acceleration response of the head would also reduce rotational acceleration response of **the** head and the extension-flexion response of the neck. On the other hand, the weight of the helmet on the head would tend to increase inertial and post-impact response of the head and neck.

The net effect does not appear to strongly favor either of these competing factors and there is no significant contribution of the helmet use in neck injury.

Another important factor bearing on this proposition is that those impacts which occur to the unprotected face can transmit force to the head and the neck independent of helmet use. Consider the following example: The motorcycle rider wearing a full coverage helmet impacts his unprotected face on the A-pillar of the automobile involved in the collision. The facial impact transmits deadly force through the facial bones to the cranium without significant attenuation. Thus severe brain injury is possible, hyperextension of the neck is likely, and dislocation-fracture of the upper cervical spine is possible. In those instances of severe impact to the mandible, the transmitted force can generate fractures at the base of the skull with deadly consequences. In any such case, helmet use is completely unrelated to the head and neck injuries.

In the event of impact to the front of a full facial coverage helmet, energy absorbing material inside the shell of the chin piece will reduce the energy transmitted to the facial bones, skull and brain. The resulting loading of the neck in hyperextension is a critical source for neck injury, and the greater impact attenuation will reduce neck motions.

TABLE 9.13.1. NECK (ONLY) INJURY SEVERITY BY HELMET USE

a. Riders

| | Count Row Pct Col Pct Tot Pct | Minor | Moderate | Severe | Serious | Critical | Fatal | Row Total |
|-----------------|--|-------|----------|--------|---------|----------|-------|--------------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | |
| With Helmet | 26 | 2 | 2 | 1 | 0 | 2 | 33 | |
| | 78.8 | 6.1 | 6.1 | 3.0 | 0.0 | 6.1 | 32.4 | |
| | 34.2 | 50.0 | 20.0 | 100.0 | 0.0 | 28.6 | | |
| | 25.5 | 2.0 | 2.0 | 1.0 | 0.0 | 2.0 | | |
| Without Helmet | 50 | 2 | 8 | 0 | 4 | 5 | 69 | |
| | 72.5 | 2.9 | 11.6 | 0.0 | 5.8 | 7.2 | 67.6 | |
| | 65.8 | 50.0 | 80.0 | 0.0 | 100.0 | 71.4 | | |
| | 49.0 | 2.0 | 7.8 | 0.0 | 3.9 | 4.9 | | |
| Column Total | 76 | 4 | 10 | 1 | 4 | 7 | 102 | |
| | 74.5 | 3.9 | 9.8 | 1.0 | 3.9 | 6.9 | 100.0 | |

b. Passengers

| | Count Row Pct Col Pct Tot Pct | Minor | Row |
|-----------------|--|-------|-------|
| | | 1 | Total |
| With Helmet | 1 | 1 | 1 |
| | 100.0 | 10.0 | |
| | 10.0 | | |
| Without Helmet | 9 | 9 | 9 |
| | 100.0 | 90.0 | |
| | 90.0 | | |
| Column Total | 10 | 10 | 100.0 |

9.14 Effect of Helmet Coverage on Motorcycle Rider Most Severe Head Injury

There were 287 cases among the 900 on-scene, in-depth accident investigation where the motorcycle rider experienced injuries to the head. In this analysis the region of the head excludes the face and considers only these regions which would be covered and protected by a contemporary configuration of helmet. **Essentially** these regions are the cranium and enclosed brain. Table 9.14.1 shows a crosstabulation of the most severe head injury region with injury severity for those 287 cases. Note that several injuries could be present in each of these cases, but only the most severe is depicted in Table 9.14.1.

TABLE 9.14.1. RIDER MOST SEVERE HEAD INJURY: INJURY SEVERITY
BY INJURY REGION (OSIDs)

| | Count | Minor 1 | Moderate 2 | severe 3 | Serious 4 | Critical 5 | Fatal 6 | Row Total. |
|-------------------------|-------------------------------|------------|---------------|-------------|--------------|---------------|------------|---------------|
| | Row Pct Col Pct Tot Pct | | | | | | | |
| B | | 0 | 0 | 5 | 1 | 3 | 3 | 12 |
| Basal | | 0.0 | 0.0 | 41.7 | 8.3 | 25.0 | 25.0 | 4.2 |
| | | 0.0 | 0.0 | 25.0 | 11.1 | 10.0 | 21.4 | |
| | | 0.0 | 0.0 | 1.7 | 0.3 | 1.0 | 1.0 | |
| F | | 67 | 2 | 0 | 1 | 2 | 4 | 76 |
| Frontal | | 88.2 | 2.6 | 0.0 | 1.3 | 2.6 | 5.3 | 26.5 |
| | | 39.9 | 4.3 | 0.0 | 11.1 | 6.7 | 28.6 | |
| | | 23.3 | 0.7 | 0.0 | 0.3 | 0.7 | 1.4 | |
| H | | 0 | 0 | 0 | 0 | 0 | 1 | 1 |
| Foramen Magnum | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.3 |
| | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 7.1 | |
| | | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | |
| O | | 20 | 3 | 1 | 1 | 2 | 0 | 27 |
| Occipital | | 74.1 | 11.1 | 3.7 | 3.7 | 7.4 | 0.0 | 9.4 |
| | | 11.9 | 6.5 | 5.0 | 11.1 | 6.7 | 0.0 | |
| | | 7.0 | 1.0 | 0.3 | 0.3 | 0.7 | 0.0 | |
| P | | 21 | 6 | 2 | 1 | 5 | 2 | 37 |
| Parietal | | 56.8 | 16.2 | 5.4 | 2.7 | 13.5 | 5.4 | 12.9 |
| | | 12.5 | 13.0 | 10.0 | 11.1 | 16.7 | 14.3 | |
| | | 7.3 | 2.1 | 0.7 | 0.3 | 1.7 | 0.7 | |
| Q | | 21 | 31 | 9 | 4 | 16 | 3 | a4 |
| Brain-General | | 25.0 | 36.9 | 10.7 | 4.8 | 19.0 | 3.6 | 29.3 |
| | | 12.5 | 67.4 | 45.0 | 44.4 | 53.3 | 21.4 | |
| | | 7.3 | 10.8 | 3.1 | 1.4 | 5.6 | 1.0 | |
| R | | 23 | 3 | 3 | 0 | 0 | 0 | 29 |
| Orbit | | 79.3 | 10.3 | 10.3 | 0.0 | 0.0 | 0.0 | 10.1 |
| | | 13.7 | 6.5 | 15.0 | 0.0 | 0.0 | 0.0 | |
| | | 8.0 | 1.0 | 1.0 | 0.0 | 0.0 | 0.0 | |
| T | | 16 | 1 | 0 | 1 | 2 | 1 | 21 |
| Temporal | | 76.2 | 4.8 | 0.0 | 4.8 | 9.5 | 4.6 | 7.3 |
| | | 9.5 | 2.2 | 0.0 | 11.1 | 6.7 | 7.1 | |
| | | 5.6 | 0.3 | 0.0 | 0.3 | 0.7 | 0.3 | |
| Column Total | | 168 | 46 | 20 | 9 | 30 | 14 | 287 |
| | | 58.5 | 16.0 | 7.0 | 3.1 | 10.5 | 4.9 | 100.0 |

Table 9.14.2 shows the frequency of the **most** severe head injury with type of helmet coverage. **The** outstanding fact here is the overwhelming frequency of the **unhelmeted** rider, contributing approximately 80% of the cases of most severe head injury. Comparing helmet coverage in these injury data with helmet use by the accident-involved riders gives the following:

TABLE 9.14.2. FREQUENCY OF MOST SEVERE HEAD INJURY AND EFFECT OF HELMET USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Partial | 1. | 10 | 3.5 | 18.2 | 18.2 |
| Full | 2. | 25 | 8.7 | 45.5 | 63.6 |
| Full Facial-105 | 3. | 6 | 2.1 | 10.9 | 74.5 |
| Full Facial-120 | 4. | 14 | 4.9 | 25.5 | 100.0 |
| Unknown | 8. | 4 | 1.4 | Missing | 100.0 |
| N.A., No Helmet | 9. | 228 | 79.4 | Missing | 100.0 |
| | TOTAL | 287 | 100.0 | 100.0 | |

| <u>Helmet Coverage</u> | <u>Most Severe Head Injury</u> | <u>Use by the Accident Riders</u> |
|------------------------|--------------------------------|-----------------------------------|
| Partial | 10 (18.2%) | 32 (9.4%) |
| Full | 25 (45.5%) | 197 (57.6%) |
| Full Facial | 20 (36.4%) | 113 (33.0%) |

This comparison shows a significant over-representation for the partial coverage helmet. The partial coverage helmet does not protect the cranium and brain as well as other helmet configurations.

Table 9.14.3 shows the distribution of the motorcycle rider most severe head injuries and the effect of helmet use. The benefit of any kind of helmet is powerfully shown in these data. There is no significant difference in benefit from the full coverage or **full facial** coverage helmet because both helmet configurations cover the head completely. The partial coverage helmet is certainly **more** effective than no helmet at all, but its effectiveness is significantly below that of the full and full facial coverage helmets.

9.15 Effect of Helmet Coverage on Motorcycle Rider Most Severe Face Injury

There were 244 cases among the 900 on-scene, in-depth accident investigations where the motorcycle rider experienced injuries to the face. In this analysis, the injuries to the regions of the face are collected and the extreme values of injury severity are noted for each accident case. Table 9.15.1 shows the regions of the face and the frequency of the **most** severe face injury occurring in that region. Note that the mandible is the most frequent region of most severe facial injury.

An important point to note here is that the severe facial impacts are closely related to severe head injury. For example, a severe impact injury to the mandible can be **accompanied** by transmitted force to the skull and brain, and related injury.

TABLE 9.14.3. RIDER MOST SEVERE HEAD INJURY
INJURY SEVERITY BY TYPE OF HELMET WORN
(OSIDs)

| Helmet Type | Count Row Pct Col Pct Tot Pct | None | Minor | Moderate | Severe | serious | Critical | Fatal | Row Total |
|---------------------|--|------|-------|----------|--------|---------|----------|-------|-----------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | |
| Partial | 22 | 7 | 1 | 1 | 0 | 1 | 0 | 32 | |
| | 68.8 | 21.9 | 3.1 | 3.1 | 0.0 | 3.1 | 0.0 | 3.6 | |
| | 3.6 | 4.2 | 2.2 | 5.0 | 0.0 | 3.3 | 0.0 | | |
| Full | 2.4 | 0.8 | 0.1 | 0.1 | 0.0 | 0.1 | 0.0 | | |
| | 172 | 12 | 5 | 1 | 3 | 3 | 197 | | |
| | 87.3 | 6.1 | 2.5 | 0.5 | 0.3 | 1.5 | 1.5 | 21.9 | |
| Full Facial-105 | 28.1 | 7.1 | 10.9 | 5.0 | 11.1 | 10.0 | 21.4 | | |
| | 19.1 | 1.3 | 0.6 | 0.1 | 0.1 | 0.3 | 0.3 | | |
| | 8 | 4 | 2 | 0 | 0 | 0 | 0 | 14 | |
| Full Facial-120 | 57.1 | 28.6 | 14.3 | 0.0 | 0.0 | 0.0 | 0.0 | 1.6 | |
| | 1.3 | 2.4 | 4.3 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 0.9 | 0.4 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| Unknown | 85 | 8 | 3 | 0 | 1 | 2 | 0 | 99 | |
| | 85.9 | 8.1 | 3.0 | 0.0 | 1.0 | 2.0 | 0.0 | 11.0 | |
| | 13.9 | 4.8 | 6.5 | 0.0 | 11.1 | 6.7 | 0.0 | | |
| N/A No Helmet | 9.4 | 0.9 | 0.3 | 0 | 0 | 0.1 | 0.2 | 0.0 | |
| | 1.9 | 2 | 0 | 1 | 0 | 1 | 0 | 22 | |
| | 81.8 | 9.1 | 0.0 | 4.5 | 0.0 | 4.5 | 0.0 | 2.4 | |
| N/A No Helmet | 2.9 | 1.2 | 0.0 | 5.0 | 0.0 | 3.3 | 0.0 | | |
| | 2.0 | 0.2 | 0.0 | 0.1 | 0.0 | 0.1 | 0.0 | | |
| | 308 | 135 | 35 | 17 | 7 | 23 | 11 | 536 | |
| Column Total | 57.5 | 25.2 | 6.5 | 3.2 | 1.3 | 4.3 | 2.1 | 59.6 | |
| | 50.2 | 80.4 | 76.1 | 85.0 | 77.8 | 76.7 | 78.6 | | |
| | 34.2 | 15.0 | 3.9 | 1.9 | 0.8 | 2.6 | 1.2 | | |
| Column Total | 613 | 168 | 46 | 20 | 9 | 30 | 14 | 900 | |
| | 68.1 | 18.7 | 5.1 | 2.2 | 1.0 | 3.3 | 1.6 | 100.0 | |

TABLE 9.15.1. REGION OF MOTORCYCLE RIDER MOST SEVERE FACE INJURY (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (5) |
|----------------|-------|--------------------|------------------------|------------------------|
| Frontal | F | 42 | 17.2 | 17.2 |
| Face-General | K | 29 | 11.9 | 11.9 |
| Mandible | M | 68 | 27.9 | 27.9 |
| Nasal | N | 32 | 13.1 | 13.1 |
| Orbit | R | 32 | 13.1 | 13.1 |
| Maxilla | X | 12 | 4.9 | 4.9 |
| Zygoma | Z | 29 | 11.9 | 11.9 |
| | TOTAL | 244 | 100.0 | 100.0 |

Table 9.15.2 shows that these 244 most severe facial injuries are essentially symmetrical.

TABLE 9.15.2. SIDE OF MOTORCYCLE RIDER MOST SEVERE FACE INJURY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|
| Bilateral | B | 25 | 10.2 | 10.4 |
| Central | C | 49 | 20.1 | 20.4 |
| Left | L | 76 | 31.1 | 31.7 |
| Midline | M | 1 | 0.4 | 0.4 |
| Right | R | 89 | 36.5 | 37.1 |
| Unknown | U | 4 | 1.6 | Missing |
| | TOTAL | 244 | 100.0 | 100.0 |

Table 9.15.3 shows the crosstabulation of most severe face injury region and injury severity. Caution is due during evaluation of these data because of the close relation between facial impacts and head injury. For example, an injury to the maxilla or zygoma of moderate severity is sure to transmit at least moderate severity threat to the brain. So the data of 9.15.3 portray only the surface facial injury severity and the threat of transmitted force through this injury region is always a possibility.

The only serious and critical injury severities shown in Table 9.15.3 are related to injuries to the inferior frontal region. Of course, the chance of underlying brain injury is very high.

Table 9.15.4 shows the frequency of the most severe face injury and the effect of helmet use. Comparing helmet coverage in these injury data with helmet use by the accident-involved riders gives the following:

| <u>Helmet Coverage</u> | <u>Most Severe Face Injury</u> | <u>Use by the Accident Riders</u> |
|------------------------|--------------------------------|-----------------------------------|
| Partial | 6 (10.7%) | 32 (9.4%) |
| Full | 37 (66.1%) | 197 (57.6%) |
| Full Facial | 13 (23.2%) | 113 (33.0%) |

This comparison shows a definite underrepresentation of the full facial helmet coverage in these most severe facial injuries. The frequencies shown do not establish a high level of statistical significance but this **underrpresentation** must be considered with the concurrent advantage of reducing force transmitted to the brain from facial impact. This additional consideration increases the apparent advantage of the full facial coverage helmet, i.e., the additional coverage increases head protection as well as protecting the face.

TABLE 9.15.3. RIDER MOST SEVERE FACE INJURY REGION BY INJURY SEVERITY (OSIDs)

| count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | ROW Total |
|--|-------------|---------------|-------------|--------------|---------------|--------------|
| F | 37 | 2 | 0 | 1 | 2 | 42 |
| Frontal | 88.1 | 4.8 | 0.0 | 2.4 | 4.8 | 17.2 |
| | 18.1 | 6.7 | 0.0 | 100.0 | 100.0 | |
| | 15.2 | 0.8 | 0.0 | 0.4 | 0.8 | |
| K | 28 | 1 | 0 | 0 | 0 | 29 |
| Face-General | 96.6 | 3.4 | 0.0 | 0.0 | 0.0 | 11.9 |
| | 13.7 | 3.3 | 0.0 | 0.0 | 0.0 | |
| | 11.5 | 0.4 | 0.0 | 0.0 | 0.0 | |
| M | 54 | 11 | 3 | 0 | 0 | 68 |
| Mandible | 19.4 | 16.2 | 4.4 | 0.0 | 0.0 | 27.9 |
| | 26.5 | 36.7 | 42.9 | 0.0 | 0.0 | |
| | 22.1 | 4.5 | 1.2 | 0.0 | 0.0 | |
| N | 24 | 8 | 0 | 0 | 0 | 32 |
| Nasal | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 13.1 |
| | 11.8 | 26.7 | 0.0 | 0.0 | 0.0 | |
| | 9.8 | 3.3 | 0.0 | 0.0 | 0.0 | |
| R | 25 | 3 | 4 | 0 | 0 | 32 |
| Orbit | 78.1 | 9.4 | 12.5 | 0.0 | 0.0 | 13.1 |
| | 12.3 | 10.0 | 57.1 | 0.0 | 0.0 | |
| | 10.2 | 1.2 | 1.6 | 0.0 | 0.0 | |
| X | 9 | 3 | 0 | 0 | 0 | 12 |
| Maxilla | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 4.9 |
| | 4.4 | 10.0 | 0.0 | 0.0 | 0.0 | |
| | 3.7 | 1.2 | 0.0 | 0.0 | 0.0 | |
| Z | 27 | 2 | 0 | 0 | 0 | 29 |
| Zygoma | 93.1 | 6.9 | 0.0 | 0.0 | 0.0 | 11.9 |
| | 13.2 | 6.7 | 0.0 | 0.0 | 0.0 | |
| | 11.1 | 0.8 | 0.0 | 0.0 | 0.0 | |
| Column Total | 204 83.6 | 30 12.3 | 7 2.9 | 1 0.4 | 2 0.8 | 244 100.0 |

TABLE 9.15.4. FREQUENCY OF MOST SEVERE FACE INJURY AND EFFECT OF HELMET USE (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|--------------|-----------------------|------------------------------|------------------------------|
| Partial | 1. | 6 | 2.5 | 10.7 |
| Full | 2. | 37 | 15.2 | 66.1 |
| Full Facial-105 | 3. | 1 | 0.4 | 1.8 |
| Full Facial-120 | 4. | 12 | 4.9 | 21.4 |
| Unknown | 8. | 5 | 2.0 | Missing |
| N.A. | 9. | 183 | 75.0 | Missing |
| | TOTAL | 244 | 130.0 | 100.0 |

Table 9.15.5 shows the distribution of the most severe face injuries and the effect of helmet use. The benefit of any kind of helmet is powerful as shown in these data. The benefit of the full facial coverage helmet is clearly evident, especially as AIS >1.

TABLE 9.15.5. RIDER MOST SEVERE FACE INJURY: INJURY SEVERITY BY TYPE OF HELMET WORN (OSIDs)

| Helmet Type | Count | | | | | | Row total |
|------------------------|-------------------------------|-----------|------------|---------------|-------------|--------------|-----------|
| | Row Pct Col Pct Tot Pct | None 0 | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | |
| Partial | 26 | 5 | 1 | 0 | 0 | 0 | 32 |
| | 81.3 | 15.6 | 3.1 | 0.0 | 0.0 | 0.0 | 3.6 |
| | 4.0 | 2.5 | 3.3 | 0.0 | 0.0 | 0.0 | |
| | 2.9 | 0.6 | 0.1 | 0.0 | 0.0 | 0.0 | |
| Full | 160 | 31 | 6 | 0 | 0 | 0 | 197 |
| | 81.2 | 15.7 | 3.0 | 0.0 | 0.0 | 0.0 | 21.9 |
| | 24.4 | 15.2 | 20.0 | 0.0 | 0.0 | 0.0 | |
| | 17.8 | 3.4 | 0.7 | 0.0 | 0.0 | 0.0 | |
| Full Facial-105 | 13 | 1 | 0 | 0 | 0 | 0 | 14 |
| | 92.9 | 7.1 | 0.0 | 0.0 | 0.0 | 0.0 | 1.6 |
| | 2.0 | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 1.4 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Full Facial-120 | a7 | 11 | 0 | 0 | 1 | 0 | 99 |
| | 07.9 | 11.1 | 0.0 | 0.0 | 1.0 | 0.0 | 11.0 |
| | 13.3 | 5.4 | 0.0 | 0.0 | 100.0 | 0.0 | |
| | 9.7 | 1.2 | 0.0 | 0.0 | 0.1 | 0.0 | |
| Unknown | 17 | 3 | 2 | 0 | 0 | 0 | 22 |
| | 77.3 | 13.6 | 9.1 | 0.0 | 0.0 | 0.0 | 2.4 |
| | 2.6 | 1.5 | 6.7 | 0.0 | 0.0 | 0.0 | |
| | 1.9 | 0.3 | 0.2 | 0.0 | 0.0 | 0.0 | |
| N.A. No Helmet | 353 | 153 | 21 | 7 | 0 | 2 | 536 |
| | 65.9 | 28.5 | 3.9 | 1.3 | 0.0 | 0.4 | 59.6 |
| | 53.8 | 75.0 | 70.0 | 100.0 | 0.0 | 100.0 | |
| | 39.2 | 17.0 | 2.3 | 0.8 | 0.0 | 0.2 | |
| Column Total | 656 | 204 | 30 | 7 | 1 | 2 | 900 |
| | 72.9 | 22.7 | 3.3 | 0.8 | 0.1 | 0.2 | 100.0 |

The benefit of the full facial coverage helmet is somewhat expected because of the chin piece structure situated in front of the face, and the likelihood of the helmet being equipped with a face shield. The benefit of a full coverage helmet in reducing facial injury may not be so apparent but the full coverage helmet can offer significant impact protection to the frontal and orbital regions and part of the **zygomatic** regions. **Also**, the full coverage helmet may be equipped with a face shield, which may offer **some** load-spreading function.

9.16 Effect of Helmet Coverage on Motorcycle Rider Most Severe Neck Injury

There were 88 cases among the 900 on-scene, in-depth accident investigations where the motorcycle rider experienced neck injury. In the majority of

these cases (70 cases), the **most** severe neck injury was only a minor cervical sprain, or complaint of pain. Table 9.16.1 shows a crosstabulation of region and severity for the 88 most severe neck injury cases.

TABLE 9.16.1. RIDER MOST SEVERE NECK INJURY REGION BY SEVERITY (OSIDs)

| Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | severe 3 | Critical 5 | Fatal 6 | Row Total |
|--|----------------------------|--------------------------|---------------------------|--------------------------|--------------------------|--------------|
| | | | | | | |
| C Cervical-General | 70 94.6 97.2 79.5 | 1 1.4 100.0 1.1 | 0 0.0 0.0 0.0 | 1 1.4 50.0 1.1 | 2 2.7 28.6 2.3 | 74 84.1 |
| Y Throat | 1 100.0 1.4 1.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 1.1 |
| 1 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 16.7 50.0 1.1 | 5 83.3 71.4 5.7 | 6 6.8 |
| 2 Cervical Vertebra | 1 50.0 1.4 1.1 | 0 0.0 0.0 0.0 | 1 50.0 16.7 1.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 2.3 |
| 5 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 100.0 33.3 2.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 2.3 |
| 6 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 100.0 33.3 2.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 2.3 |
| 7 Cervical Vertebra | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 100.0 16.7 1.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 1.1 |
| Column Total | 72 81.8 | 1 1.1 | 6 6.8 | 2 2.3 | 7 8.0 | 88 100.0 |

Table 9.16.2 shows the frequency of the most severe neck injury and the related **type** of **helmet** used. **When** combined with helmet use data, these data show an overall underrepresentation of helmet users in these neck injury cases, i.e., helmet users have less than their share of neck injuries.

TABLE 9.16.2. RIDER MOST SEVERE NECK INJURY FREQUENCY AND HELMET USE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|--------------|--------------------|------------------------|------------------------|
| Partial | 1. | 4 | 4.5 | 14.8 |
| Full | 2. | 8 | 9.1 | 29.6 |
| Full Facial-105 | 3. | 2 | 2.3 | 7.4 |
| Full Facial-120 | 4. | 13 | 14.8 | 48.1 |
| Unknown | 8. | 1 | 1.1 | Missing |
| N.A. No Helmet | 9. | 60 | 68.2 | Missing |
| | TOTAL | 88 | 100.0 | 100.0 |

| <u>Helmet coverage</u> | <u>Most Severe Neck Injury</u> | <u>Use by the Accident Riders</u> |
|------------------------|--------------------------------|-----------------------------------|
| Partial | 4 (14.8%) | 32 (9.4%) |
| Full | 8 (29.6%) | 197 (57.6%) |
| Full Facial | 15 (55.6%) | 113 (33.0%) |
| None | 60 | 536 |

However, the users of the full facial coverage helmets seem to fare no better than the **unhelmeted** riders, and do not exhibit the advantage obtained by the full coverage helmeted riders. The differences between **the** helmet coverage are significant and deserve elaboration. If all helmeted riders are **compared** for all **unhelmeted** riders, a slight advantage is shown but the measure of statistical significance is not high.

| | <u>No Neck Injury</u> | Neck Injury | Total |
|--------------------------|-----------------------|-------------|-------|
| Helmeted Riders | 315 | 27 | 342 |
| Unhelmeted Riders | 476 | 60 | 536 |
| Total | 791 | 87 | 878 |

$$(\chi^2 = 2.19)$$

However, if these data are separated to exclude full facial coverage helmet use, there is higher significance to the advantage for **helmet use**.

| <u>Helmet Use</u> | <u>No Neck Injury</u> | <u>Neck Injury</u> | Total |
|---------------------------|-----------------------|--------------------|-------|
| Partial and Full coverage | 217 | 12 | 229 |
| No Helmet Use | 476 | 60 | 536 |
| Total | 693 | 72 | 765 |

$$(\chi^2 = 5.99)$$

One final set of these data establish the relation of the full facial coverage helmet to neck injury,

| <u>Helmet Use</u> | <u>No Neck Injury</u> | <u>Neck Injury</u> | Total |
|----------------------------------|-----------------------|--------------------|-------|
| Full Facial Coverage Only | 98 | 15 | 113 |
| No Helmet Use | 476 | 60 | 536 |
| Total | 574 | 75 | 649 |

$$(\chi^2 = 0.22)$$

Here the full facial coverage **helmet** shows a slight but insignificant overrepresentation, i.e., the full facial coverage helmet has essentially no significant effect on neck injury. There is no advantage but yet there is no disadvantage.

These comparisons need recall of the competing factors which affect helmet relation to neck injury. The helmet mass could contribute to neck injuries which are caused by "whiplash" or inertial loading. However, the more usual motorcycle accident involves the rider hitting his head on something then the helmet attenuates head impact and thus limits resulting neck motion. It is clear from these data that the lighter partial and full coverage helmets have a significant beneficial effect reducing neck injury, and the full facial coverage **helmet** simply has no significant effect. The principal observation is that there is no adverse effect and no vulnerability to neck injury from helmet use.

Table 9.16.3 provides a crosstabulation of helmet coverage and injury severity for the most severe neck injury in the 88 accident cases. A **case-by-case** review of the nine critical and fatal neck injury cases discloses no substantial arguments that **helmet participation** was a critical event, i.e., helmet use did not cause - and helmet use would not have prevented - these spectacular critical and fatal neck injuries.

However, for all other lower levels of the neck injury severity, helmet use has a favorable effect on neck injury.

TABLE 9.16.3. RIDER MOST SEVERE NECK INJURY: INJURY SEVERITY BY TYPE OF HELMET WORN (OSIDS)

| Helmet Type | Count | None 0 | Minor 1 | Moderate 2 | Severe 3 | Critical 5 | Fatal 6 | Row Total |
|-----------------|-------------------------------|-----------|------------|---------------|-------------|---------------|------------|--------------|
| | Row Pct Col Pct Tot Pct | | | | | | | |
| Partial | 28 | 4 | 0 | 0 | 0 | 0 | 0 | 32 |
| | 87.5 | 12.5 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 3.6 |
| | 3.4 | 5.6 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.1 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Full | 189 | 7 | 0 | 1 | 0 | 0 | 0 | 197 |
| | 95.9 | 3.6 | 0.0 | 0.5 | 0.0 | 0.0 | 0.0 | 21.9 |
| | 23.3 | 9.7 | 0.0 | 16.7 | 0.0 | 0.0 | 0.0 | |
| | 21.0 | 0.8 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | |
| Full Facial-105 | 12 | 1 | 0 | 0 | 0 | 1 | 14 | |
| | 85.7 | 7.1 | 0.0 | 0.0 | 0.0 | 7.1 | 1.6 | |
| | 1.5 | 1.4 | 0.0 | 0.0 | 0.0 | 14.3 | | |
| | 1.3 | 0.1 | 0.0 | 0.0 | 0.0 | 0.1 | | |
| Full Facial-120 | 86 | 1 | 0 | 0 | 0 | 2 | 99 | |
| | 86.9 | 11.1 | 0.0 | 0.0 | 0.0 | 2.0 | 11.0 | |
| | 10.6 | 15.3 | 0.0 | 0.0 | 0.0 | 28.6 | | |
| | 9.6 | 1.2 | 0.0 | 0.0 | 0.0 | 0.2 | | |
| Unknown | 21 | 4 | 0 | 0 | 0 | 0 | 22 | |
| | 95.5 | 4.0 | 0.0 | 0.0 | 0.0 | 0.0 | 2.4 | |
| | 2.6 | 1.4 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| | 2.3 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | | |
| N.A. No Helmet | 476 | 48 | 0 | 0 | 2 | 4 | 536 | |
| | 88.8 | 9.0 | 0.0 | 0.0 | 0.4 | 0.7 | 59.6 | |
| | 58.6 | 66.7 | 100.0 | 83.3 | 100.0 | 57.1 | | |
| | 52.9 | 5.3 | 0.1 | 0.6 | 0.2 | 0.4 | | |
| Column Total | 812 | 72 | 1 | 6 | 2 | 7 | 900 | |
| | 90.2 | 8.0 | 0.1 | 0.7 | 0.2 | 0.8 | 100.0 | |

9.17 Effect of Eye Protection on Motorcycle Rider Most Severe Face Injury

As in the previous sections, it was noted that 244 of the 900 on-scene, in-depth accident cases involved some facial region injury to the motorcycle rider. In the 244 cases, most of the riders were not using any sort of eye protection such as face shields and goggles, and most of the riders were not using helmets.

Table 9.17.1 shows the eye protection used by the motorcycle riders in the 244 cases where facial injuries were experienced. Note that the most common eye protection used was the wrap around face shield, which is a helmet appliance.

Table 9.17.2 shows the crosstabulation of motorcycle rider most severe face injury region and severity. Note that injuries to the mandible are most frequent in these data.

TABLE 9.17.1. MOTORCYCLE RIDER MOST SEVERE FACE INJURY
AND EYE PROTECTION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| None | 0. | 197 | 80.7 | 85.7 |
| Goggles | 1. | 4 | 1.6 | 1.7 |
| Wrap-around Face Shield | 2. | 19 | 7.8 | 8.3 |
| Bubble Type Face Shield | 3. | 5 | 2.0 | 2.2 |
| Visor-face Shield | 4. | 5 | 2.0 | 2.2 |
| Unknown | 8. | 14 | 5.7 | Missing |
| | TOTAL | 244 | 100.0 | 100.0 |

Table 9.17.3 shows the crosstabulation of the **most** severe face injury severity with the various **types** of eye protection. A condensation of these data provides the following comparison:

| <u>Eye Protection</u> | <u>No Face Injury</u> | Face Injury | Total |
|-----------------------------|-----------------------|--------------------|------------|
| None | 436 | 197 | 633 |
| Goggles, Face Shields, etc. | 185 | 33 | 218 |
| Total | 621 | 230 | 851 |

$$(\chi^2 = 20.2)$$

This comparison shows a significant difference in the frequency of face injury between protected and unprotected riders. However, the benefit is not due exclusively to the eye protection; the benefit is due in part to the helmet to which the appliance is attached. The helmet can offer substantial protection to the frontal, orbital and part of the zygomatic regions, and to all other areas if the helmet has full facial coverage.

There is just no way that any optical quality acetate, acrylic or **poly-carbonate** face shield can offer substantial impact energy absorption. The only function available from the face shield is minor load-spreading and abrasion protection. Fortunately, **83.6%** of those facial injuries are minor and apparently within this level of protection.

The most important observation here is that the combination of a helmet and eye protection will be extremely powerful in reducing face injuries. Of course, the most effective helmet configuration would be the full facial coverage.

TABLE 9.17.2. RIDER MOST SEVERE FACE INJURY: INJURY SEVERITY
BY INJURY REGION (OSIDs)

| | Count Row Pct Col Pct Tot Pct | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Row Total |
|-----------------|--|------------|---------------|-------------|--------------|---------------|--------------|
| F | | 37 | 2 | 0 | 1 | 2 | 42 |
| Frontal | 88.1 | 4.8 | 0.0 | 2.4 | 4.8 | | 17.2 |
| | 18.1 | 6.7 | 0.0 | 100.0 | 100.0 | | |
| | 15.2 | 0.8 | 0.0 | 0.4 | 0.8 | | |
| K | | 28 | 1 | 0 | 0 | 0 | 29 |
| Face-General | 96.6 | 3.4 | 0.0 | 0.0 | 0.0 | 0.0 | 11.9 |
| | 13.7 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 11.5 | 0.4 | 0.0 | 0.0 | 0.0 | 0.0 | |
| M | | 54 | 11 | 3 | 0 | 0 | 68 |
| Mandible | 79.4 | 16.2 | 4.4 | 0.0 | 0.0 | 0.0 | 27.9 |
| | 26.5 | 36.7 | 42.9 | 0.0 | 0.0 | | |
| | 22.1 | 4.5 | 1.2 | 0.0 | 0.0 | | |
| N | | 24 | 8 | 0 | 0 | 0 | 32 |
| Nasal | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 0.0 | 13.1 |
| | 11.8 | 26.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 9.8 | 3.3 | 0.0 | 0.0 | 0.0 | 0.0 | |
| R | | 25 | 3 | 4 | 0 | 0 | 32 |
| Orbit | 78.1 | 9.4 | 12.5 | 0.0 | 0.0 | 0.0 | 13.1 |
| | 12.3 | 10.0 | 57.1 | 0.0 | 0.0 | | |
| | 10.2 | 1.2 | 1.6 | 0.0 | 0.0 | | |
| X | | 9 | 3 | 0 | 0 | 0 | 12 |
| Maxilla | 75.0 | 25.0 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 |
| | 4.4 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 3.7 | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Z | | 27 | 2 | 0 | 0 | 0 | 29 |
| Zygoma | 93.1 | 6.9 | 0.0 | 0.0 | 0.0 | 0.0 | 11.9 |
| | 13.2 | 6.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 11.1 | 0.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Column Total | 204 83.6 | 30 12.3 | 7 2.9 | 1 0.4 | 2 0.8 | 244 100.0 | |

TABLE 9.17.3. RIDER MOST SEVERE FACE INJURY: INJURY SEVERITY BY EYE PROTECTION TYPE (OSIDs)

| count Row Pct Col Pct Tot Pct | None | Minor | Moderate | Severe | erious | Critical | Row Total |
|--|-----------------------------|--------------------------------------|--------------------------|-------------------------|--|--------------------------|---------------------|
| | 0 | 1 | 2 | 3 | 4 | 5 | |
| None | 407 68.4 62.0 45.2 | 160 26.9 70.4 17.8 | 22 3.7 73.3 2.4 | 4 0.7 57.1 0.4 | 0 0.0 0.0 0.0 | 2 0.3 100.0 0.2 | 595 66.1 |
| N.A. | 29 76.3 4.4 3.2 | 7 18.4 3.4 0.8 | 1 2.6 3.3 0.1 | 1 2.6 14.3 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 38 4.2 |
| Goggles | 24 85.7 3.1 2.1 | 2 7.1 1.0 0.2 | 1 3.6 3.3 0.1 | 1 3.6 14.3 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 28 3.1 |
| Wrap Around Face Shield | 95 83.3 14.5 10.6 | 17 14.9 a.3 1.9 | 1 0.9 3.3 0.1 | 0 0.0 0.0 0.0 | 1 0.9 00.0 0.1 | 0 0.0 0.0 0.0 | 114 12.7 |
| Bubble Type Face Shield | 33 86.8 5.0 3.7 | 4 10.5 2.0 0.4 | 1 2.6 3.3 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 36 4.2 |
| Visor-Face Shield | 28 84.8 4.3 3.1 | 5 15.2 2.6 0.6 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 33 3.7 |
| Other | 5 00.0 0.8 0.6 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 5 0.6 |
| unknown | 35 71.4 5.3 3.9 | 9 18.4 4.4 1.0 | 4 a.2 13.3 0.4 | 1 2.0 14.3 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 49 5.4 |
| Column Total | 656 72.9 | 204 22.7 | 30 3.3 | 7 0.8 | 1 0.1 | 2 0.2 | 900 100.0 |

9.18 Effect of Eye Protection on Motorcycle Rider Most Severe Eye Injury

There were 46 cases among the 900 on-scene in-depth accident investigations where the motorcycle rider experienced injury in the specific region of the orbit. Protection from injury in this region may appear to be a simple matter of wearing some sort of eye protection but actually the protection problem has several subtle factors involved.

Table 9.18.1 shows the nature of those injuries in the region of the orbit of the accident-involved motorcycle rider. The injuries are noted to be primarily **symmetrical** lacerations and abrasions to the integument. Actual injuries to the **visual** system are rare; only two of the injuries noted included the eye itself. Table 9.18.2 shows the **effect of helmet use**, helmet coverage and eye protection on motorcycle rider eye (region) injuries.

TABLE 9.18.1. MOTORCYCLE RIDER EYE INJURIES SYSTEM ORGAN, LESION AND **SIDE** OF ORBIT REGION INJURIES (OSIDs)

| Category Label | Cbde | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|
| <u>System-Organ</u> | | | | |
| Integumentary | I | 41 | 89.1 | 89.1 |
| Skeletal | S | 3 | 6.5 | 6.5 |
| All Systems in Region | W | 1 | 2.2 | 2.2 |
| Eye | Y | 1 | 2.2 | 2.2 |
| | TOTAL | 46 | 100.0 | 100.0 |
| <u>Lesion</u> | | | | |
| Abrasion | A | 10 | 21.7 | 21.7 |
| Contusion | C | 4 | 8.7 | 8.7 |
| Fracture | F | 3 | 6.5 | 6.5 |
| Hemorrhage | H | 1 | 2.2 | 2.2 |
| Hematoma | J | 3 | 6.5 | 6.5 |
| Laceration | L | 23 | 50.0 | 50.0 |
| Avulsion | V | 2 | 4.3 | 4.3 |
| | TOTAL | 46 | 100.0 | 100.0 |
| <u>Side</u> | | | | |
| Bilateral | B | 1 | 2.2 | 2.2 |
| Left | L | 24 | 52.2 | 52.2 |
| Right | R | 21 | 45.7 | 45.7 |
| | TOTAL | 46 | 100.0 | 100.0 |

TABLE 9.18.2. EFFECT OF **HELMET** USE, **HELMET** COVERAGE, AND EYE PROTECTION TYPE ON RIDER EYE INJURIES (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|
| With Helmet | 1. | 7 | 15.2 | 15.5 |
| Without Helmet | 3. | 38 | 82.6 | 84.5 |
| Unknown | a. | 1 | 2.2 | Missing |
| | TOTAL | 46 | 100.0 | 100.0 |
| <u>Helmet Coverage</u> | | | | |
| Partial | 1. | 2 | 4.3 | 33.3 |
| Full | 2. | 3 | 6.5 | 50.0 |
| Full Facial-120 | 4. | 1 | 2.2 | 16.7 |
| Unknown | 8. | 2 | 4.3 | Missing |
| N.A. No Helmet | 9. | 38 | 82.6 | Missing |
| | TOTAL | 46 | 100.0 | 100.0 |
| <u>Eye Protection</u> | | | | |
| None | 0. | 34 | 73.9 | 82.9 |
| Goggles | 1. | 1 | 2.2 | 2.4 |
| Wrap-around Face Shield | 2. | 2 | 4.3 | 4.9 |
| Bubble Type Face Shield | 3. | 2 | 4.3 | 4.9 |
| Visor-Face Shield | 4. | 2 | 4.3 | 4.9 |
| Unknown | a. | 5 | 10.9 | Missing |
| | TOTAL | 46 | 100.0 | 100.0 |

Table 9.18.3 shows a crosstabulation of eye (region) injuries and eye protection. In general, these data show the great advantage in eye (region) protection for those riders using eye protection. However, the protection devices shown in these data are **most** usually the appliances attached to helmets so the benefit of protection results from the combined effect of the helmet and the appliance.

Previous sections have described the very high frequency of the **accident-**involved riders failing to use any kind of eye protection or eyeglasses. It appears that the principal function of eye coverage is the preservation of good vision to avoid accident involvement. Visual system injuries are rare and the combination of the contemporary safety helmet and face shield offer a high level of protection from eye (region) injury.

9.19 Motorcycle Rider Most Severe Injury, Somatic (Body) Regions

In order to provide a perspective for injury prevention, the somatic injuries were evaluated to determine the injury of highest severity in each of the 900 on-scene, in-depth accident cases. Table 9.19.1 provides a **crosstabulation** of this rider most severe somatic injury severity and body region.

TABLE 9.18.3. RIDER MOST SEVERE EYE REGION INJURY: INJURY SEVERITY BY EYE PROTECTION (OSIDs)

| | Count | Minor 1 | Moderate 2 | severe 3 | Row Total |
|-------------------------|-------------------------------|------------|---------------|-------------|--------------|
| | Row Pct Col Pct Tot Pct | | | | |
| None | | 29 | 3 | 2 | 34 |
| | | 85.3 | 8.8 | 5.9 | 73.9 |
| | | 74.4 | 100.0 | 50.0 | |
| | | 63.0 | 6.5 | 4.3 | |
| Goggles | | 0 | 0 | 1 | 1 |
| | | 0.0 | 0.0 | 100.0 | 2.2 |
| | | 0.0 | 0.0 | 25.0 | |
| | | 0.0 | 0.0 | 2.2 | |
| Wrap Around Face Shield | | 2 | 0 | 0 | 2 |
| | | 100.0 | 0.0 | 0.0 | 4.3 |
| | | 5.1 | 0.0 | 0.0 | |
| | | 4.3 | 0.0 | 0.0 | |
| Bubble Type Face Shield | | 2 | 0 | 0 | 2 |
| | | 100.0 | 0.0 | 0.0 | 4.3 |
| | | 5.1 | 0.0 | 0.0 | |
| | | 4.3 | 0.0 | 0.0 | |
| Visor-Face Shield | | 2 | 0 | 0 | 2 |
| | | 100.0 | 0.0 | 0.0 | 4.3 |
| | | 5.1 | 0.0 | 0.0 | |
| | | 4.3 | 0.0 | 0.0 | |
| Unknown | | 4 | 0 | 1 | 5 |
| | | 80.0 | 0.0 | 20.0 | 10.9 |
| | | 10.3 | 0.0 | 25.0 | |
| | | 8.7 | 0.0 | 2.2 | |
| Column Total | | 39 84.8 | 3 6.5 | 4 a.7 | 46 100.0 |

These injuries are essentially symmetrical, mostly **integumentary (46.8%)**, mostly abrasions (**26.7%**), contusions (17.9%) and lacerations (10.2%). This implies that coverage of the somatic regions with heavy garments of thick cloth and leather has a great prospect of injury reduction. However, fractures and dislocations are 28.1% of these most severe injuries and convenient counter-measure is not so obvious.

The data of 9.19.1 show that injuries to the hip, thigh, knee, lower leg, ankle and foot total 56.4% of these most severe injuries. However, injuries to these regions are perhaps disabling **but not** deadly. The lethal somatic injuries are primarily those to the chest, and abdomen. These most severe somatic injuries at serious, critical and fatal levels are very high energy injuries and effective protection systems are truly limited.

TABLE 9.19.1. RIDER MOST SEVERE SOMATIC INJURY:
INJURY SEVERITY BY INJURY REGION (OSIDs)

| | Count | | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Critical 5 | Fatal 6 | Row Total |
|------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|--------------------------|-------------|--------------|
| | Row Pct | Col Pct | | | | | | | |
| A Upper Arm | 19 73.1 3.9 2.2 | 3 11.5 1.6 0.3 | 3 11.5 2.8 0.3 | 1 3.8 1.9 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 26 3.0 | |
| B Back | 29 82.9 5.9 3.4 | 3 8.6 1.6 0.3 | 3 8.6 2.8 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 35 4.0 | |
| C Chest | 6 11.5 1.2 0.7 | 7 13.5 3.8 0.8 | 10 19.2 9.3 1.2 | 2 3.8 3.7 0.2 | 17 32.7 85.0 2.0 | 10 19.2 90.9 1.2 | 0 0.0 0.0 0.0 | 52 6.0 | |
| E Elbow | 27 77.1 5.5 3.1 | 5 14.3 2.7 0.6 | 3 8.6 2.8 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 35 4.0 | |
| K Knee | 80 70.8 16.3 9.2 | 21 18.6 11.5 2.4 | 10 8.8 9.3 1.2 | 2 1.8 3.7 0.2 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 113 13.1 | |
| L Lower Leg | 78 45.1 15.9 9.0 | 33 19.1 18.0 3.8 | 30 17.3 28.0 3.5 | 32 18.5 59.3 3.7 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 173 20.0 | |
| M Abdomen | 22 48.9 4.5 2.5 | 11 24.4 6.0 1.3 | 4 8.9 3.7 0.5 | 5 11.1 9.3 0.6 | 3 6.7 15.0 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 45 5.2 | |
| O Whole Body | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 100.0 9.1 0.1 | 1 0.1 | |
| P Pelvic Hip | 43 75.4 8.8 5.0 | 3 5.3 1.6 0.3 | 9 15.8 8.4 1.0 | 2 3.5 3.7 0.2 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 57 6.6 | |
| Q Ankle Foot | 36 41.9 7.3 4.2 | 39 45.3 21.3 4.5 | 10 11.6 9.3 1.2 | 1 1.2 1.9 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 86 9.9 | |
| R Forearm | 32 71.1 6.5 3.7 | 4 8.9 2.2 0.5 | 3 6.7 2.8 0.3 | 6 13.3 11.1 0.7 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 45 5.2 | |
| S Shoulders | 23 50.0 4.7 2.7 | 13 28.3 7.1 1.5 | 10 21.7 9.3 1.2 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 46 5.3 | |
| T Thigh | 31 52.5 4.3 3.6 | 17 28.8 9.3 2.0 | 9 15.3 8.4 1.0 | 2 3.4 3.7 0.2 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 59 6.8 | |
| W Wrist-Hand | 63 70.8 12.9 7.3 | 22 24.7 12.0 2.5 | 3 3.4 2.8 0.3 | 1 1.1 1.9 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 89 10.3 | |
| X Upper Extremities | 0 0.0 0.0 0.0 | 1 100.0 0.5 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 1 0.1 | |
| Y Trunk | 1 50.0 0.2 0.1 | 1 50.0 0.5 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 0.2 | |
| Column Total | 490 56.6 | 183 21.2 | 107 12.4 | 54 6.2 | 20 2.3 | 11 1.3 | 865 100.0 | | |

9.20 Effect of Upper Torso Garment on Most Severe Upper Torso Injury

Table 9.20.1 shows the type of upper torso garment worn by the motorcycle rider and the investigator evaluation of that garment in prevention or reduction of injury. Table 9.20.2 shows the type of upper torso garment worn by the passenger and the investigator's evaluation of that garment in prevention or reduction of injury. In general, these accident **cases** showed that the heavier garment prevented or reduced minor and moderate injuries of abrasion. Obviously no leather jacket **will** prevent a dislocated shoulder or rib fracture so the expectations were for abrasion protection primarily.

TABLE 9.20.1. MOTORCYCLE RIDER UPPER TORSO GARMENT AND INVESTIGATOR EVALUATION OF EFFECTIVENESS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| <u>Garment</u> | | | | | |
| None | 0. | 14 | 1.6 | 1.6 | 1.6 |
| Light Cloth | 1. | 248 | 27.6 | 28.9 | 30.5 |
| Medium Cloth | 2. | 226 | 25.1 | 26.3 | 56.9 |
| Heavy Cloth | 3. | 303 | 33.7 | 35.3 | 92.2 |
| Leather | 4. | 67 | 7.4 | 7.8 | 100.0 |
| Unknown | 8. | 42 | 4.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 88 | 9.8 | 10.7 | 10.7 |
| Yes | 1. | 456 | 50.7 | 55.7 | 66.4 |
| No | 2. | 275 | 30.6 | 33.6 | 100.0 |
| Unknown | 8. | 32 | 3.6 | Missing | 100.0 |
| N.A. | 9. | 49 | 5.4 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.20.3 shows a crosstabulation of motorcycle rider most severe upper torso injury severity and the effect of upper torso garment. The heavier upper torso garments clearly contribute a significant protection, especially for the lower levels of injury severity. A condensation of these data provides the following perspective.

| <u>Upper Torso Coverage</u> | <u>No Injury</u> | <u>Injury</u> | Total |
|-----------------------------|------------------|---------------|-------|
| None, light and medium | 207 | 281 | 488 |
| Heavy cloth, leather | 189 | 181 | 370 |
| Total | 396 | 462 | 858 |

$$(\chi^2 = 6.01)$$

TABLE 9.20.2. PASSENGER UPPER TORSO GARMENT AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Garment</u> | | | | | |
| None | 0. | 1 | 0.1 | 0.7 | 0.7 |
| Light Cloth | 1. | 54 | 6.0 | 37.8 | 38.5 |
| Medium Cloth | 2. | 40 | 4.4 | 28.0 | 66.4 |
| Heavy Cloth | 3. | 40 | 4.4 | 28.0 | 94.4 |
| Leather | 4. | 8 | 0.9 | 5.6 | 100.0 |
| Unknown | 8. | 9 | 1.0 | Missing | 100.0 |
| N.A. | 9. | 748 | 83.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 25 | 2.8 | 18.5 | 18.5 |
| Yes | 1. | 63 | 7.0 | 46.7 | 65.2 |
| No | 2. | 47 | 5.2 | 34.8 | 100.0 |
| Unknown | 8. | 9 | 1.0 | Missing | 100.0 |
| N.A. | 9. | 756 | 84.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

This grouping of coverage and injury provides a simple comparison of the significant benefit of the heavy denim or leather jacket. Of course, this comparison is well known to those riders *who* have experienced "road rash" or have ruined leathers. Either experience is as meaningful as the above data; but one of the two is a more difficult experience.

9.21 Effect of Lower Torso Coverage on Most Severe Lower Torso Injury

Table 9.21.1 shows the type of lower torso garment worn by the motorcycle rider and the investigator's evaluation of that garment in the prevention or reduction of injury. Table 9.21.2 shows the type of lower torso garment worn by the passenger and the investigator's opinion of that garment in the prevention or reduction of injury. In Table 9.21.1 the code of "None" was selected to represent the equivalent protection offered by a Speedo bathing suit. No bona fide streakers were encountered in these accidents. In general, these accident cases showed that *heavier garments* prevented or *reduced* minor and moderate injuries of abrasion. Obviously, no set of custom leathers will prevent a compound, **comminuted** fracture of the tibia and **fibula** trapped between an automobile bumper and the motorcycle. The expectations were for the heavier garments to resist abrasion only.

TABLE 9.20.3. RIDER MOST SEVERE UPPER TORSO INJURY: INJURY SEVERITY BY UPPER TORSO GARMENT (OSIDs)

| Count Row Pct Col Pct Tot Pct | None | Minor | Moderate | Severe | Serious | Critical | Fatal | Row Total |
|--|--|-----------------------------------|--|--------------------------|--------------------------------|-------------------------|-------------------------|--------------------|
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | |
| None | 3 21.4 0.7 0.3 | 8 57.1 2.3 0.9 | 0 0.0 0.0 0.0 | 2 14.3 5.1 0.2 | 0 0.0 0.0 0.0 | 1 7.1 4.a 0.1 | 0 0.0 0.0 0.0 | 14 1.6 |
| Light Cloth | 103 41.5 24.6 11.4 | 107 43.1 30.5 11.9 | 21 8.5 40.4 2.3 | 10 4.0 25.6 1.1 | 2 0.8 25.0 0.2 | 4 1.6 19.0 0.4 | 1 0.4 10.0 0.1 | 248 27.6 |
| Medium Cloth | 101 44.7 24.1 11.2 | 98 43.4 27.9 10.9 | 13 5.8 25.0 1.4 | a 3.5 20.5 0.9 | 2 0.9 25.0 0.2 | 3 1.3 14.3 0.3 | 1 0.4 10.0 0.1 | 226 25.1 |
| Heavy Cloth | 152 50.2 36.3 16.9 | 110 36.3 31.3 12.2 | 11 3.6 21.2 1.2 | 13 4.3 33.3 1.4 | 2 0.7 25.0 0.2 | 7 2.3 33.3 0.8 | a 2.6 80.0 0.9 | 303 33.7 |
| Leather | 37 55.2 8.8 4.1 | 21 31.3 6.0 2.3 | 4 6.0 7.7 0.4 | 3 4.5 7.7 0.3 | 0 0.0 0.0 0.0 | 2 3.0 9.5 0.2 | 0 0.0 0.0 0.0 | 67 7.4 |
| Unknown | 23 54.8 5.5 2.6 | 7 16.7 2.0 0.8 | 3 7.1 5.8 0.3 | 3 7.1 7.7 0.3 | 2 4.8 25.0 0.2 | 4 9.5 19.0 0.4 | 0 0.0 0.0 0.0 | 42 4.7 |
| Column Total | 419 46.6 | 351 39.0 | 52 5.8 | 39 4.3 | a 0.9 | 21 2.3 | 10 1.1 | 900 100.0 |

TABLE 9.21.1. MOTORCYCLE RIDER LOWER TORSO GARMENT AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Garment</u> | | | | | |
| None | 0. | 2 | 0.2 | 0.2 | 0.2 |
| Light Cloth | 1. | 40 | 4.4 | 4.7 | 4.9 |
| Medium Cloth | 2. | 664 | 73.8 | 77.3 | 82.2 |
| Heavy Cloth | 3. | 149 | 16.6 | 17.3 | 99.5 |
| Leather | 4. | 4 | 0.4 | 0.5 | 100.0 |
| Unknown | 8. | 41 | 4.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 21 | 2.3 | 2.6 | 2.6 |
| Yes | 1. | 349 | 38.8 | 43.4 | 46.0 |
| NO | 2. | 435 | 48.3 | 54.0 | 100.0 |
| Unknown | a. | 24 | 2.7 | Missing | 100.0 |
| N.A. | 9. | 71 | 7.9 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.21.2. PASSENGER LOWER TORSO GARMENT AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Garment</u> | | | | | |
| Light Cloth | 1. | 8 | 0.9 | 5.6 | 5.6 |
| Medium Cloth | 2. | 124 | 13.8 | 87.3 | 93.0 |
| Heavy Cloth | 3. | 10 | 1.1 | 7.0 | 100.0 |
| Unknown | a. | 10 | 1.1 | Missing | 100.0 |
| N.A. | 9. | 748 | 83.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 6 | 0.7 | 4.4 | 4.4 |
| Yes | 1. | 64 | 7.1 | 46.7 | 51.1 |
| NO | 2. | 67 | 7.4 | 48.9 | 100.0 |
| Unknown | 8. | 7 | 0.8 | Missing | 100.0 |
| N.A. | 9. | 756 | 84.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.21.3 shows a crosstabulation of motorcycle rider most severe lower torso injury severity and the effect of the lower torso garment. A condensation of these data provides the following comparison:

| <u>Lower Torso Coverage</u> | <u>No Injury</u> | <u>Injury</u> | Total |
|-----------------------------|------------------|---------------|-------|
| None, Light and Medium | 104 | 602 | 706 |
| Heavy Cloth, Leather | 32 | 121 | 153 |
| Total | 132 | 723 | 859 |

$$(\chi^2 = 3.16)$$

TABLE 9.21.3. RIDER MOST SEVERE LOWER TORSO INJURY: INJURY SEVERITY BY LOWER TORSO GARMENT (OSIDs)

| Count Row Pct Col Pct Tot Pct | None 0 | Minor 1 | Moderate 2 | severe 3 | Serious 4. | Critical 5 | Unknown 8 | Row Total |
|--|----------------------------|-----------------------------|--|--------------------------|-------------------------------|--------------------------------|---------------------------------|--------------|
| None | 2 100.0 1.4 0.2 | 0 0.0 0.0 0.0 | 0.0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 2 0.2 |
| Light Cloth | 3 7.5 2.0 0.3 | 21 52.5 4.0 2.3 | 10 25.0 9.4 1.1 | 2 5.0 2.8 0.2 | 4 10.0 9.3 0.4 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 40 4.4 |
| Medium Cloth | 99 14.9 66.9 11.0 | 397 59.8 75.3 44.1 | 73 11.0 68.9 8.1 | 61 9.2 04.7 6.8 | 31 4.7 72.1 3.4 | 2 0.3 66.7 0.2 | 1 0.2 100.0 0.1 | 664 73.8 |
| Heavy Cloth | 31 20.8 20.9 3.4 | 89 59.7 16.9 9.9 | 15 10.1 14.2 1.7 | 7 4.7 9.7 0.8 | 7 4.7 16.3 0.8 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 146 16.6 |
| Leacher | 1 25.0 0.7 0.1 | 3 75.0 0.6 0.3 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 4 0.4 |
| Unknown | 12 29.3 6.1 1.3 | 17 41.5 3.2 1.9 | 8 19.5 7.5 0.9 | 2 4.9 2.8 0.2 | 1 2.4 2.3 0.1 | 1 2.4 33.3 0.1 | 0 0.0 0.0 0.0 | 41 4.6 |
| Column Total | 148 16.4 | 527 58.6 | 106 11.8 | 72 8.0 | 43 4.8 | 3 0.3 | 1 0.1 | 900 100.0 |

In these data, the heavy cloth and leather lower torso garments show an underrepresentation in injury, but not at high level of significance. The benefit of the heavy garment in reducing abrasion injury is truly without question;

the prospect of any heavy garment in reducing contusion, fracture, dislocation, etc., is weak indeed. As in the upper torso garment analysis, the heavy garment has the most reasonable expectation of reducing "road rash".

9.22 Effect of Foot Coverage on Most Severe Ankle-Foot Injury

Table 9.22.1 shows the motorcycle rider footwear coverage and the investigator evaluation of that footwear in the prevention or reduction of injury. Table 9.22.2 shows the passenger footwear coverage and the investigator evaluation of that footwear in the prevention or reduction of injury. It was typical that some motorcycle riders appreciated the benefit of heavy shoes or boots since 39.6% of the accident-involved riders were using heavy duty footwear. In general the use of heavy shoes **or** boots reduced the low severity injuries to the ankle and foot. This was particularly obvious in the prevention of minor and moderate abrasions to the ankle and foot.

TABLE 9.22.1. MOTORCYCLE RIDER FOOT **COVERAGE AND** INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Foot Coverage</u> | | | | | |
| None | 0. | 3 | 0.3 | 0.4 | 0.4 |
| Sandal, Loafer | 1. | 147 | 16.3 | 17.4 | 17.7 |
| Street Shoe | 2. | 340 | 37.8 | 40.2 | 57.9 |
| Boot | 3. | 356 | 39.6 | 42.1 | 100.0 |
| Unknown | 8. | 54 | 6.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 139 | 15.4 | 16.6 | 16.6 |
| Yes | 1. | 540 | 60.0 | 64.6 | 81.2 |
| No | 2. | 157 | 17.4 | 18.8 | 100.0 |
| Unknown | 8. | 49 | 5.4 | Missing | 100.0 |
| N.A. | 9. | 15 | 1.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.22.2. PASSENGER FOOT COVERAGE ANJJ INVESTIGATOR
EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| <u>Foot Coverage</u> | | | | | |
| None | 0. | 5 | 0.6 | 3.6 | 3.6 |
| Sandal, Loafer | 1. | 45 | 5.0 | 32.4 | 36.0 |
| Street Shoe | 2. | 60 | 6.7 | 43.2 | 79.1 |
| Boot | 3. | 29 | 3.2 | 20.9 | 100.0 |
| unknown | 8. | 13 | 1.4 | Missing | 100.0 |
| N.A. | 9. | 748 | 83.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 36 | 4.0 | 27.5 | 27.5 |
| Yes | 1. | 62 | 6.9 | 47.3 | 74.8 |
| No | 2. | 33 | 3.7 | 25.2 | 100.0 |
| Unknown | 8. | 15 | 1.7 | Missing | 100.0 |
| N.A. | 9. | 754 | 83.8 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

Table 9.22.3 shows the crosstabulation of motorcycle rider most severe ankle-foot injury severity and the foot coverage. The benefits of protection by the use of heavy shoes and boots is evident at all levels of injury. The overall effect is **shown** by the following comparison:

| <u>Foot Coverage</u> | <u>NO Injury</u> | <u>Ankle-foot Injury</u> | Total |
|---|------------------|--------------------------|-------|
| None, sandals, athletic and medium weight shoes | 348 | 142 | 490 |
| Heavy shoes and boots | 288 | 68 | 356 |
| Total | 636 | 210 | 846 |

$$(\chi^2 = 10.26)$$

In these data, the heavy shoes and boots demonstrate an advantage of protection which is highly significant. Alternately, these data may portray the vulnerability to ankle-foot injury for those motorcycle riders wearing only light footwear, or nothing at all.

TABLE 9.22.3. RIDER MOST **SEVERE** ANKLE-FOOT INJURY: INJURY SEVERITY BY ANKLE-FOOT COVERAGE (OSIDs)

| Count Row Pct Col Pct Tot Pct | None 0 | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Row Total |
|--|-----------------------------|--------------------------------|---------------------------------|-------------------------|---------------------------|--------------|
| | | | | | | |
| None | 1 33.3 0.1 0.1 | 1 33.3 0.7 0.1 | 1 33.3 1.5 0.1 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 0.3 |
| Light Sandal | 96 65.3 14.2 10.7 | 37 25.2 26.6 4.1 | 11 7.5 16.7 1.2 | 3 2.0 18.8 0.3 | 0 0.0 0.0 0.0 | 147 16.3 |
| Medium St Shoes | 251 73.8 37.0 27.9 | 58 17.1 41.7 6.4 | 23 6.8 34.8 2.6 | 7 2.1 43.8 0.8 | 0. 0.0 100.0 0.1 | 340 37.8 |
| Heavy Shoes-Boot | 288 80.9 42.5 32.0 | 37 10.4 26.6 4.1 | 28 7.9 42.4 3.1 | 3 0.8 18.8 0.3 | 0 0.0 0.0 0.0 | 356 39.6 |
| Unknown | 42 77.8 6.2 4.7 | 6 11.1 4.3 0.7 | 3 5.6 4.5 0.3 | 3 5.6 18.8 0.3 | 0 0.0 0.0 0.0 | 54 6.0 |
| Column | 678 75.3 | 139 15.4 | 66 7.3 | 16 1.8 | 1 0.1 | 900 100.0 |

A heavy shoe or boot has the possibility of preventing or reducing injury to the lower leg, as well as the ankle and foot. Table 9.22.4 shows a **cross-**tabulation of the most severe injury to the region of the lower leg, ankle and foot and the foot coverage. This grouping of most severe injuries now includes those much more severe fractures **of the** distal half of the lower leg - which would be difficult to prevent or reduce even with the use of heavy **motocross** boots. A condensation of these data provides the following comparison:

| <u>Foot Coverage</u> | <u>No Injury</u> | <u>Lower-leg, Ankle-foot Injury</u> | Total |
|---|------------------|---|-------|
| None, sandals athletic and medium weight shoes | 201 | 289 | 490 |
| Heavy shoes and boots | 171 | 185 | 356 |
| Total | 372 | 474 | 846 |

$$(\chi^2 = 3.84)$$

TABLE 9.22.4. RIDER MOST SEVERE INJURY TO ANKLE-FOOT AND LOWER LEG INJURY SEVERITY BY FOOT COVERAGE (OSIDs)

| Count Row Pct Col Pct Tot Pct | None 0 | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | Unknown 8 | Row Total |
|--|----------------------------------|------------------------------------|---------------------------|--------------------------------|--------------------------------|--------------------------|--------------|
| None | 1 33.3 0.3 0.1 | 0 0.0 0.0 0.0 | 2 66.7 2.1 0.2 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 0 0.0 0.0 0.0 | 3 0.3 |
| Light Sandal | 58 39.5 14.7 6.4 | 56 38.1 17.2 6.2 | 19 12.9 20.0 2.1 | 8 5.4 16.7 0.9 | 6 4.1 17.1 0.7 | 0 0.0 0.0 0.0 | 147 16.3 |
| Medium St. Shoes | 142 41.8 35.9 15.8 | 133 39.1 40.8 14.5 | 35 10.3 36.8 3.9 | 17 5.0 35.4 1.9 | 12 3.5 34.3 16 | 0 0.0 100.0 0.1 | 340 37.5 |
| Heavy Shoes-Boots | 171 48.0 43.3 19.0 | 115 32.3 35.3 12.8 | 35 9.8 36.8 3.9 | 19 5.3 39.6 2.1 | 4.5 45.7 1.8 | 0 0.0 0.0 0.0 | 356 39.6 |
| unknown | 23 42.6 5.8 2.6 | 22 40.7 6.7 2.4 | 4 7.4 4.2 0.4 | 4 7.4 a.3 0.4 | 1 1.9 2.9 0.1 | 0 0.0 0.0 0.0 | 54 6.0 |
| Column Total | 395 43.9 | 326 36.2 | 95 10.6 | 48 5.3, | 35 3.9 | 1 0.1 | 900 100.0 |

This comparison shows that the benefit of the heavy shoes and boots is significant in the overall evaluation. However, this benefit exists primarily at the low levels of injury severity and is due mostly to the reduced injury to the ankle and foot.

Also, there was no case where the heavy shoe or boot aggravated injury. These cases showed no vulnerability to injury from the use of heavy protective footwear.

9.23 Effect of Hand Protection on Most Severe Hand Injury

Table 9.23.1 shows the type of motorcycle rider hand protection and the investigator evaluation of that hand protection in preventing or reducing hand injury. Table 9.23.2 shows the type of passenger hand protection and the investigators evaluation of that hand protection in preventing or reducing hand injury. In general, these accident cases showed that the heavier glove or gauntlet prevented or reduced minor and moderate injuries of abrasion. Obviously, no glove or gauntlet has the ability to prevent wrist fracture or dislocation so the expectations were for abrasion protection only.

TABLE 9.23.1. MOTORCYCLE RIDER HAND PROTECTION AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 522 | 58.0 | 61.5 | 61.5 |
| Light | 1. | 34 | 3.8 | 4.0 | 65.5 |
| Medium | 2. | 128 | 14.2 | 15.1 | 80.5 |
| Heavy | 3. | 165 | 18.3 | 19.4 | 100.0 |
| Unknown | 8. | 51 | 5.7 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| No Contact | 0. | 113 | 12.6 | 27.8 | 27.8 |
| Yes | 1. | 263 | 29.2 | 64.6 | 92.4 |
| NO | 2. | 31 | 3.4 | 7.6 | 100.0 |
| Unknown | 8. | 56 | 6.2 | Missing | 100.0 |
| N.A. | 9. | 437 | 48.6 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

TABLE 9.23.2. PASSENGER HAND PROTECTION AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Coverage</u> | | | | | |
| None | 0. | 131 | 14.6 | 91.0 | 91.0 |
| Light | 1. | 2 | 0.2 | 1.4 | 92.4 |
| Medium | 2. | 6 | 0.7 | 4.2 | 96.5 |
| Heavy | 3. | 5 | 0.6 | 3.5 | 100.0 |
| Unknown | 8. | 8 | 0.9 | Missing | 100.0 |
| N.A. | 9. | 748 | 83.1 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| No Contact | 0. | 34 | 3.8 | 75.6 | 75.6 |
| Yes | 1. | 10 | 1.1 | 22.2 | 97.8 |
| NO | 2. | 1 | 0.1 | 2.2 | 100.0 |
| Unknown | 8. | 9 | 1.0 | Missing | 100.0 |
| N.A. | 9. | 846 | 94.0 | Missing | 100.0 |
| | TOTAL | 900 | 100.0 | 100.0 | |

The most severe injuries to the wrist-hand region of the motorcycle riders were collected separately for analysis. Table 9.23.3 shows the hand protection involved in these 288 accident cases, and the investigator evaluation of the effectiveness of this rider hand coverage. Table 9.23.4 shows the type and side of lesion in these 288 cases for the most severe wrist-hand injury. Abrasions predominate in this type of lesion and it is clear that heavy gloves or gauntlets can provide protection for this type of injury. These most severe wrist-hand injuries are essentially symmetrical.

TABLE 9.23.3. RIDER HAND PROTECTION FOR MOST SEVERE WRIST-HAND INJURY AND INVESTIGATOR EVALUATION OF EFFECTIVENESS (OSIDs)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| <u>Coverage</u> | | | | | |
| None | 0. | 190 | 66.0 | 69.6 | 69.6 |
| Light | 1. | 13 | 4.5 | 4.8 | 74.4 |
| Medium | 2. | 30 | 10.4 | 11.0 | 85.3 |
| Heavy | 3. | 40 | 13.9 | 14.7 | 100.0 |
| Unknown | a. | 15 | 5.2 | Missing | 100.0 |
| | TOTAL | 288 | 100.0 | 100.0 | |
| <u>Effective?</u> | | | | | |
| Yes | 1. | 58 | 20.1 | 70.7 | 70.7 |
| NO | 2. | 24 | 8.3 | 29.3 | 100.0 |
| No Contact | 0. | 4 | 1.4 | Missing | 100.0 |
| Unknown | a. | 13 | 4.5 | Missing | 100.0 |
| N.A. | 9. | 189 | 65.6 | Missing | 100.0 |
| | TOTAL | 288 | 100.0 | 100.0 | |

In addition, the lesions of fracture and dislocation to the region of the wrist-hand are shown to be 19.8% of these most severe injuries. Such severe injuries are not preventable by the use of heavy gloves or gauntlets, but the combination of fractures and dislocations with severe abrasions complicates injury management.

Table 9.23.5 provides a crosstabulation of the motorcycle rider most severe wrist injury severity and hand protection. These data show a significant advantage to the use of medium and heavy gloves and gauntlets. Light hand protection such as handball gloves, cloth gloves, etc., offer no significant protection, as is illustrated with the following data:

| <u>Hand Coverage</u> | <u>No Injury</u> | <u>Wrist-Hand Injury</u> | Total |
|----------------------|------------------|--------------------------|-------|
| None | 332 | 190 | 522 |
| Light Gloves | 21 | 13 | 34 |
| Total | 353 | 203 | 556 |

$$(\chi^2 = 0)$$

TABLE 9.23.4. MOTORCYCLE RIDER MOST **SEVERE** WRIST-HAND INJURY TYPE AND SIDE OF LESION (**OSIDs**)

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|------------------|-------|--------------------|------------------------|------------------------|
| Type | | | | |
| Abrasion | A | 147 | 51.0 | 51.0 |
| Bum | B | 1 | 0.3 | 0.3 |
| Contusion | C | 17 | 5.9 | 5.9 |
| Dislocation | D | 4 | 1.4 | 1.4 |
| Fracture | F | 53 | 18.4 | 18.4 |
| Swelling | G | 3 | 1.0 | 1.0 |
| Hemorrhage | H | 1 | 0.3 | 0.3 |
| Laceration | L | 23 | 8.0 | 8.0 |
| Amputation | M | 2 | 0.7 | 0.7 |
| Pain | P | 14 | 4.9 | 4.9 |
| Sprain | S | 22 | 7.6 | 7.6 |
| Avulsion | V | 1 | 0.3 | 0.3 |
| | TOTAL | 288 | 100.0 | 100.0 |
| Side | | | | |
| Bilateral | B | 53 | 18.4 | 18.4 |
| Left | L | 111 | 38.5 | 33.5 |
| Right | R | 123 | 42.7 | 42.7 |
| Unknown | U | 1 | 0.3 | 0.0 |
| | TOTAL | 288 | 100.0 | 100.0 |

Since there is no significant difference between the light glove and no glove at all, the injuries can be compared in the following way:

| <u>Hand Coverage</u> | <u>No Injury</u> | <u>Wrist-Hand Injury</u> | Total |
|---------------------------------------|------------------|--------------------------|------------|
| None, Light gloves | 353 | 203 | 556 |
| Medium and Heavy gloves and gauntlets | 223 | 70 | 293 |
| Total | 576 | 273 | 849 |

$$(\chi^2 = 13.44)$$

In this way, the medium and heavy glove and gauntlet is seen to provide a highly significant level of protection from the typical hand injury.

TABLE 9.23.5. RIDER MOST SEVERE WRIST-HAND INJURY: INJURY SEVERITY BY TYPE OF HAND COVERAGE (OSIDs)

| Hand coverage | count | None 0 | Minor 1 | Moderate 2 | Severe 3 | Serious 4 | ROW Total |
|---------------|-------------------------------|-----------|------------|---------------|-------------|--------------|--------------|
| | Row Pct Col Pct Tot Pct | | | | | | |
| None | 332 | 161 | 23 | 5 | 1 | 522 | |
| | 63.6 | 30.8 | 4.4 | 1.0 | 0.2 | 58.0 | |
| | 54.2 | 68.8 | 52.3 | 55.6 | 100.0 | | |
| | 36.9 | 17.9 | 2.6 | 0.6 | 0.1 | | |
| Light | 21 | 11 | 2 | 0 | 0 | 34 | |
| | 61.8 | 32.4 | 5.9 | 0.0 | 0.0 | 3.8 | |
| | 3.4 | 4.7 | 4.5 | 0.0 | 0.0 | | |
| | 2.3 | 1.2 | 0.2 | 0.0 | 0.0 | | |
| Medium | 98 | 23 | 6 | 1 | 0 | 128 | |
| | 76.6 | 18.0 | 4.7 | 0.8 | 0.0 | 14.2 | |
| | 16.0 | 9.8 | 13.6 | 11.1 | 0.0 | | |
| | 10.9 | 2.6 | 0.7 | 0.1 | 0.0 | | |
| Heavy | 125 | 28 | 10 | 2 | 0 | 165 | |
| | 75.8 | 17.0 | 6.1 | 1.2 | 0.0 | 18.3 | |
| | 20.4 | 12.0 | 22.7 | 22.2 | 0.0 | | |
| | 13.9 | 3.1 | 1.1 | 0.2 | 0.0 | | |
| Unknown | 36 | 11 | 3 | 1 | 0 | 51 | |
| | 70.6 | 21.6 | 5.9 | 2.0 | 0.0 | 5.7 | |
| | 5.9 | 4.7 | 6.8 | 11.1 | 0.0 | | |
| | 4.0 | 1.2 | 0.3 | 0.1 | 0.0 | | |
| Column Total | 612 | 234 | 44 | 9 | 1 | 900 | |
| | 68.0 | 26.0 | 4.9 | 1.0 | 0.0 | 100.0 | |

9.24 Helmet Use Related to Hearing Critical Traffic Sounds

All riders involved in the 900 accidents were interviewed with the objective of determining any failure to detect traffic hazards by vision, hearing, etc. Also, the accident was carefully reconstructed to relate all pre-crash sounds in the chronology of the accident.

Hearing has little to do with the detection of traffic hazards: Vision predominates! No case of the 900 on-scene, in-depth investigations revealed a failure to detect critical traffic sounds, for helmeted or **unhelmeted** riders. Of course, there was no evidence then of any helmet obscuring or limiting the hearing of such traffic sounds.

As noted in the section on rider physiological impairment, a very small number of riders had partial or total hearing loss, and even these accidents showed no participation of hearing loss in accident causation.

9.25 Injuries Attributed to Safety Helmets

Only four injuries of the 861 head and neck injuries were attributed to the safety helmet, and all four were injury severity **AIS = 1**, or minor injuries. Two cases involved minor injury to nasal soft tissues by excessively large helmets rotating forward and contacting eyeglass frames. In both cases, the helmet attenuated head impact and protected against a threat level of **AIS = 3** or 4.

A third helmet associated injury involved an **AIS = 1** abrasion to the lower region of the jaw of the helmet user. The abrasion was due to a severe retention force on the chin strap when multiple impacts occurred on the helmet. The helmet fully attenuated the impacts and protected against critical or fatal threats, **AIS = 5** or 6.

A fourth helmet associated injury was an **AIS = 1** abrasion to the integument of the neck. The motorcycle rider over-braked for a traffic problem, skidded, and vaulted **highside** to land on the left shoulder and left side of the head. The resulting impact rotated the head and neck to the right and caused an impingement of the helmet edge on the soft tissues and skin. No other neck injury resulted; no head injury resulted. The helmet clearly protected against impact threat equivalent to **AIS = 4** to 6.

Each one of these four **cases** showed that protection from possibly fatal injury was achieved, but with a small penalty of a "band-aid" type injury. Each one of these cases reinforced opinions regarding safety helmet effectiveness.

No other significant injuries were attributed in any way to the safety helmet equipment.

9.26 Rider Fatigue and Helmet Use

The question of fatigue, and the possibility of the helmet use contributing to fatigue, was given high priority in the accident data collection. The great part of these accidents occurred within the first hour of time riding; almost half occurred within the first six minutes! Fatigue--with or without a helmet--was difficult to expect with such *short* riding time before the accident.

The investigator was expected to evaluate the pre-crash time and rider action to determine if riding fatigue was a factor in accident causation. There was no evidence of riding fatigue in any of the accidents.

9.27 Safety Helmet Performance Related to FMVSS 218

Most of the helmets involved in these accidents were manufactured before 1974, and very few (20%) had been labeled as complying with FMVSS 218. Nevertheless, these helmets had other qualifications (Z-90, Snell, **SHCA**) and offered significant protection to the wearer, and even the simplest antique of head protection provided a major element of load spreading and impact attenuation to prevent or reduce injury. It was surprising indeed to see that a helmet of unknown origin and inexpensive manufacture could provide such adequate protection.

A great variety of shell and liner **configurations were** encountered, and very few protection failures were encountered. **The** only failures involved **poly-carbonate** shells which had deteriorated at areas of high residual stress and stress concentration, due to stress crazing and cracking. In these cases, the shell suffered premature fracture at impact then failed to distribute the load to the liner or resulted in retention failures. The only precrash damage of significance "as this crazing and cracking of polycarbonate shells, the damage to the Styrofoam liners from sissy bars and mirrors was noticed but never contributed adversely in impact attenuation.

All helmets **were** examined and evaluated for all aspects of crash performance, and that performance then compared with basic elements of helmet qualification. The specific elements of helmet performance are related as **follows:**

Penetration resistance

The current requirement for penetration resistance seems to be **severe** and it is a realistic provision for approximately 1% of the helmet impacts. Limited cases of impact with sharp metal **edges** of automobiles or environment proved the need for some penetration test in the standard. However, **in** the actual accident conditions, a **90° metal** edge "as the much **more** common threat than the pointed surface of the **FMVSS** 218 standard penetrator. The current penetration test is severe for helmet compliance and the need **for** such strength and resistance should be **more** realistic if required by the standard. The penetration test of **FMVSS** 218 should be retained but modified to provide a more realistic penetration surface. The conical point penetrator of the current test should be replaced with a hardened steel edge approximately 1/8 inch thick and 1 inch long, in order to be representative of accident impact.

Retention performance

The present requirements of **FMVSS** 218 provide adequate strength and stiffness for the retention system and do not need change. No data or evidence in specific cases showed the need of the retention system to sustain more than 300 lbs. of load (with less than the limiting deflection of 1 in.). Also, there were no data **or cases** that showed any need for less strength **or** stiffness, only minor injuries were associated with severe retention forces and these minor injuries "are unavoidable and acceptable under those circumstances. In addition, there were no cases which showed that the helmet retention system suffers great distress from dynamic or impulsive loading. In all cases where the helmet "as of proper fit and fastened securely, the helmet "as retained on the head for impact attenuation, and the dynamics of impact "era no threat to helmet retention.

Although not a part of the accident data collected, the extreme cases of retention forces showed definite asymmetry, as compared with the symmetrical loading of the retention system test. It is estimated that those cases of asymmetrical loading would be approximated by a sideways component of test load of at least 25% of the system test load.

The accident cases where the helmet was not retained on the head showed that **failure** to fasten the retention system was the primary cause of helmet

loss. The typical D-ring system is a very simple device and failure to fasten such a simple system is very difficult to explain. In **any** case, the frequency of such problems is low and does not demand the same attention as the basic problem of helmet use.

Impact attenuation performance

Present requirements seem to provide adequate impact protection for the traffic collision impact conditions. The test impact by a 6 ft. drop height exceeds approximately 90% of the accident impacts, and the test which repeats impact at the same site with the same severity is not seen in the accident data. There is no doubt that the compliance tests which **repeat** impacts at the same site can be withstood only by very good helmets, and this is the only true justification for the repeated impact of the same severity.

A more realistic **test** procedure is that of the 1970 Snell qualification, where the second impact at the test site is much less severe than the original impact. In this 1970 Snell test, the second impact at the test site is 75% of the first impact and even this is far more severe than is seen in actual accident conditions. The accident data show that any second impact is no **greater than approximately** half of the most severe first impact at any location.

The impact acceleration limits specified for the tests of **FMVSS** 218 could not be evaluated quantitatively from this research. The limits of maximum **headform** acceleration and dwell **time** could not be evaluated because replication testing of **all** helmet impacts was not provided in the research data collection. Only a limited relation could be inferred: Full facial coverage helmets were shown to be most effective, many of the full facial coverage helmets were Snell 70 qualified, Snell 70 qualification specifies **headform** acceleration limits of **300 g's** (compared to 400 g's for **PMVSS** 218) without regard for dwell time.

The impacting surface is predominantly flat pavement, so the flat anvil test is surely justified. The hemispherical anvil test realistically replicates most of the other accident impacts, except metal edges.

Coverage

Table 9.8.12 shows that 31.1% of all helmet impacts, occur below the test zones of coverage specified in **FMVSS** 218. Also, at least 11.5% of the most severe impacts occur **below** the current test zones. Of course, many other impacts were recorded on the face and head of unhelmeted riders in these **same** regions. The existence of these impacts demands that the zone of coverage and test for qualification must be lowered to guarantee impact attenuation within these areas. Two areas need to be accounted for In attempt to provide impact **attenuation** where it is not presently required. The lower part of the back of the head is not required to be covered or protected in the current standard, and the chin piece of full facial coverage helmets is not required to demonstrate any impact attenuation. The most appropriate advisory would be available from the Z-90 Committee of the American National Standards Institute, and it is recommended that this group be requested to study these data and provide recommendations for lowering of the test zone at the back of the head and provide a test procedure appropriate for the front impact attenuation applicable to full facial coverage helmets.

Visual space

No cases investigated showed any effect of the visual space interfering with vision or hazard detection, with 120° or 105° helmets. Visual space seems adequate under the present standard and no change is recommended.

Conditioning

All accident-involved helmets were being worn by the rider for sufficient time so that the interior was essentially at body temperature regardless of the ambient temperature. Consequently, cold soak provisions should apply to the exterior shell but allow the interior to be at body or equivalent temperature for test impacts.

The conditioning of the helmet by salt water immersion would be appropriate conditioning for the helmet continually worn on hot days, and the sweat-soaked accident helmet is typical of the hot day accident. It is recommended that the water immersion conditioning be modified to specify hot salt water immersion, with appropriate concentration, time and temperature.

Application of the standard

In past time, the FMVSS 218 standard applied to medium size helmets only, and hopefully that provision has been altered in recent time. All adult sizes that can be tested on the current size headform should be included in the standard. It is vital that ALL adult sizes of helmets offered for sale be required to comply with FMVSS 218 and be so labeled.

Another factor for consideration is that a few helmets which meet a particular performance standard much more severe than FMVSS 218 do not necessarily qualify for compliance, primarily because of the controversial dwell time limits of FMVSS 218. If a helmet configuration qualifies for current Snell Foundation approval, e.g., Snell 75, the helmet should be accepted as more than qualified for FMVSS 218 and could be DOT labeled.

9.28 Videotape and Movie Film Project

One project accomplished during this research was the development of a videotape and movie film which incorporated the major findings in the Status Report of Accident Data. The objective was to collect and present the most significant elements related to the effectiveness of safety helmets involved in motorcycle accidents.

With the cooperation of the United States Air Force Audio Visual Services Center at Norton Air Force Base, a script was prepared and a 22 minute videotape was produced on the subject. Motorcycle Safety-Helmet Effectiveness, DOT 9-001. The videotape was transferred to film to facilitate public use in educational facilities.

The videotape-film relates the research findings that safety helmets have an outstanding effect in preventing and reducing head and neck injuries, and contributes no adverse effects on hearing, vision, etc. The videotape-film describes the study area for this research and the methods for collection of the data.

Copies of the videotape-film are available through the Contract Technical Manager, Mr. Nicholas G. **Tsongos**, at nominal cost to private parties and without charge to public agencies and educational institutions.

10.0 EXPOSURE DATA

In order to distinguish those factors that are outstanding in accident events, accident characteristics, and accident causation, it is necessary to compare those features with the population-at-risk. The collection of exposure data needs certain constraints so that there is a special connection to the type of accident data. In this study, the location of the on-scene, in-depth accident cases was that location for the collection of exposure data. The following exposure data were collected at those accident locations on the same day-of-week, same time-of-day, and same environmental conditions. Those motorcycle riders at that location were interviewed, or photographed then contacted, to determine helmet use, trip plan, alcohol involvement, motorcycle type and size, experience, etc., so those same factors in the accident data could be evaluated.

Environmental Factors

10.1 Rider Trip Plan

Table 10.1.1 shows the distributions of trip origin and destination. As with the accident data, home and work predominate as the origin or destination of the trip.

The data on trip origin and destination are cross-tabulated in Table 10.1.2. The riders for whom "work" is both origin and destination typically ride motorcycles as a part of their work, such as messengers, police and funeral escorts.

The length of the rider's intended trip, from origin to destination is tabulated in Table 10.1.3 (Appendix D.1). The median trip length was 8.7 miles, and the predominance of short trips is evident.

These data are summarized in Table 10.1.4. Here, the predominant trip length is between 5 and 50 miles. This is consistent with a median trip length of 8.7 miles.

10.2 Time Riding Motorcycle Before Interview

Riders responding to interviews reported having spent a median of 16 minutes riding from the origin of their trip to the time of interview. The most common response was "about five minutes" or one-tenth of an hour. These data are shown in Table 10.2.1.

TABLE 10.1.1. RIDER TRIP PLAN

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|------|--------------------|------------------------|------------------------|
| <u>Origin</u> | | | | |
| Home | 1. | 281 | 12.2 | 42.8 |
| Work | 2. | 185 | 8.0 | 28.2 |
| Shopping | 3. | 51 | 2.2 | 7.8 |
| Recreation | 4. | 67 | 2.9 | 10.2 |
| Friends/Relatives | 5. | 46 | 2.0 | 7.0 |
| Bar/Drinking Party | 6. | 2 | 0.1 | 0.3 |
| School | 7. | 24 | 1.0 | 3.7 |
| Unknown | 8. | 1654 | 71.3 | MISSING |
| TOTAL | | 2310 | 100.0 | 100.0 |
| <u>Destination</u> | | | | |
| Home | 1. | 185 | 8.0 | 28.0 |
| Work | 2. | 159 | 6.9 | 24.1 |
| Shopping | 3. | 70 | 3.0 | 10.6 |
| Recreation | 4. | 150 | 6.5 | 22.7 |
| Friends/Relatives | 5. | 60 | 2.6 | 9.1 |
| Bar/Drinking Party | 6. | 1. | 0.0 | 0.2 |
| School | 7. | 35 | 1.5 | 5.3 |
| unknown | 8. | 1650 | 71.4 | MISSING |
| TOTAL | | 2310 | 100.0 | 100.0 |

10.3 Median Traffic Flow

Traffic flow along the motorcycle and other vehicle paths of travel (at the scenes of multiple vehicle collisions) was measured at each exposure site. Only vehicles engaging in a pre-crash maneuver similar to that of the **accident-involved** vehicle(s) were counted. For example, if the case accident involved a motorcycle going east and a westbound car turning left in front of the motorcycle, then all eastbound traffic was counted in the motorcycle traffic flow, but only those westbound vehicles that turned left were counted on the other vehicle traffic flow. For this reason traffic flows appear higher on the motorcycle path. Vehicles were categorized as: Motorcycles (and Mopeds), Full and Intermediate Size Cars, Compacts, Subcompacts, Pick Up Trucks and Vans, Buses and Large Trucks, and Others (including bicycles, skateboards, roller skaters, etc.)

Median traffic flow in one hour (1/2 hour before and 1/2 hour after the reference accident time) along the motorcycle path of travel for each category is shown in Table 10.3.1.

TABLE 10.1.2. RIDERTRIP PLAN - ORIGIN AND DESTINATION

| Origin | Count Row Pct Col Pct Tot Pct | Destination | | | | | | | | Row Total |
|-----------------------|--|-------------|-----------|--------------------|------------|---------------------|--------------------------|--------------|---------------------|---------------|
| | | Home | Work | Shopping Errand | Recreation | Friends Relative | Bar Drinking Party | School | Unknown- Not Obs | |
| Home | 5 | 73 | 39 | 97 | 38 | 0 | 28 | 0 | 1 | 281 |
| | 1.8 | 26.0 | 13.9 | 34.5 | 13.5 | 0.0 | 10.0 | 0.0 | 0.4 | 12.2 |
| | 2.7 | 45.9 | 55.7 | 64.7 | 63.3 | 0.0 | 80.0 | 0.0 | 100.0 | |
| | 0.2 | 3.2 | 1.7 | 4.2 | 1.6 | 0.0 | 1.2 | 0.0 | 0.0 | |
| Work | 79 | 69 | 16 | 14 | 5 | 0 | 2 | 0 | 0 | 185 |
| | 42.7 | 37.3 | 8.6 | 7.6 | 2.7 | 0.0 | 1.1 | 0.0 | 0.0 | 8.0 |
| | 42.7 | 43.4 | 22.9 | 9.3 | 8.3 | 0.0 | 5.7 | 0.0 | 0.0 | |
| | 3.4 | 3.0 | 0.7 | 0.6 | 0.2 | 0.0 | 0.1 | 0.0 | 0.0 | |
| Shopping Errand | 31 | 9 | 6 | 1 | 4 | 0 | 0 | 0 | 0 | 51 |
| | 60.8 | 17.6 | 11.8 | 2.0 | 7.8 | 0.0 | 0.0 | 0.0 | 0.0 | 2.2 |
| | 16.8 | 5.7 | 8.6 | 0.7 | 6.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 1.3 | 0.4 | 0.3 | 0.0 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Recreation | 30 | 0 | 0 | 31 | 4 | 0 | 0 | 2 | 0 | 67 |
| | 44.8 | 0.0 | 0.0 | 46.3 | 6.0 | 0.0 | 0.0 | 3.0 | 0.0 | 2.9 |
| | 16.2 | 0.0 | 0.0 | 20.7 | 6.7 | 0.0 | 0.0 | 0.1 | 0.0 | |
| | 1.3 | 0.0 | 0.0 | 1.3 | 0.2 | 0.0 | 0.0 | 0.1 | 0.0 | |
| Friends Relative | 22 | 1 | 8 | 6 | 7 | 0 | 2 | 0 | 0 | 46 |
| | 47.8 | 2.2 | 17.4 | 13.0 | 15.2 | 0.0 | 4.3 | 0.0 | 0.0 | 2.0 |
| | 11.9 | 0.6 | 11.4 | 4.0 | 11.7 | 0.0 | 5.7 | 0.0 | 0.0 | |
| | 1.0 | 0.0 | 0.3 | 0.3 | 0.3 | 0.0 | 0.1 | 0.0 | 0.0 | |
| Bar Drinking Party | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 2 |
| | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 0.5 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| School | 16 | 3 | 1 | 0 | 2 | 0 | 2 | 0 | 0 | 24 |
| | 66.7 | 12.5 | 4.2 | 0.0 | 8.3 | 0.0 | 8.3 | 0.0 | 0.0 | 1.0 |
| | 8.6 | 1.9 | 1.4 | 0.0 | 3.3 | 0.0 | 5.7 | 0.0 | 0.0 | |
| | 0.7 | 0.1 | 0.0 | 0.0 | 0.1 | 0.0 | 0.1 | 0.0 | 0.0 | |
| Unknown- Not Obs | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 1644 | 0 | 1648 |
| | 0.1 | 0.1 | 0.0 | 0.1 | 0.0 | 0.0 | 0.1 | 99.8 | 0.0 | 71.3 |
| | 0.5 | 0.6 | 0.0 | 0.7 | 0.0 | 0.0 | 2.9 | 99.7 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 71.2 | 0.0 | |
| N.A. | 0 | 3 | 0 | 0 | 0 | 0 | 0 | 3 | 0 | 6 |
| | 0.0 | 50.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 50.0 | 0.0 | 0.3 |
| | 0.0 | 1.9 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | |
| | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | |
| Column Table | 185 8.0 | 159 6.9 | 70 3.0 | 150 6.5 | 60 2.6 | 1 0.0 | 35 1.5 | 1649 71.4 | 1 0.0 | 2310 100.0 |

TABLE 10.1.4. TRIP LENGTH SUMMARY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------|-------|-----------------------|------------------------------|------------------------------|--------------------------------|
| 0-1 Mile | 1. | 50 | 2.2 | 8.4 | 8.4 |
| 1-5 Miles | 2. | 167 | 7.2 | 27.9 | 36.3 |
| 5-50 Miles | 3. | 319 | 13.8 | 53.3 | 89.6 |
| More than 50 Miles | 4. | 62 | 2.7 | 10.4 | 100.0 |
| Unknown | 8. | 1712 | 74.1 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.2.1. TIME RIDING MOTORCYCLE BEFORE INTERVIEW

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Hours | 0.0 | 23 | 1.0 | 3.9 | 3.9 |
| | 0.1 | 162 | 7.0 | 27.7 | 31.6 |
| | 0.2 | 102 | 4.4 | 17.5 | 49.1 |
| | 0.3 | 79 | 3.4 | 13.5 | 62.6 |
| | 0.4 | 19 | 0.8 | 3.3 | 65.9 |
| | 0.5 | 66 | 2.9 | 11.3 | 77.2 |
| | 0.6 | a | 0.3 | 1.4 | 78.6 |
| | 0.7 | a | 0.3 | 1.4 | 80.0 |
| | 0.8 | 12 | 0.5 | 2.1 | 82.1 |
| | 0.9 | 2 | 0.1 | 0.3 | 82.4 |
| | 1.0 | 30 | 1.3 | 5.1 | 87.5 |
| | 1.1 | 1 | 0.0 | 0.2 | 87.7 |
| | 1.3 | 1 | 0.0 | 0.2 | 87.9 |
| | 1.5 | 15 | 0.6 | 2.6 | 90.5 |
| | 2.0 | 18 | 0.8 | 3.1 | 93.6 |
| | 2.5 | 7 | 0.3 | 1.2 | 94.8 |
| | 3.0 | 12 | 0.5 | 2.1 | 96.9 |
| | 3.5 | 1 | 0.0 | 0.1 | 97.0 |
| | 4.0 | 7 | 0.3 | 1.2 | 98.2 |
| | 5.0 | 2 | 0.1 | 0.3 | 98.5 |
| | 5.2 | 1 | 0.0 | 0.2 | 98.7 |
| | 6.0 | 1 | 0.0 | 0.1 | 98.8 |
| | 7.0 | 1 | 0.0 | 0.2 | 99.0 |
| | 8.0 | 1 | 0.0 | 0.2 | 99.2 |
| 9.8 | 1 | 0.0 | 0.1 | 99.3 | |
| 12.0 | 1 | 0.0 | 0.2 | 99.5 | |
| 15.0 | 1 | 0.0 | 0.2 | 99.7 | |
| 30.0 | 1 | 0.0 | 0.1 | 99.8 | |
| 45.4 | 1 | 0.0 | 0.2 | 100.0 | |
| Unknown | 99.8 | 1726 | 74.7 | MISSING | MISSING |
| | TOTAL | 2300 | 100.0 | 100.0 | |

TABLE 10.3.1. MEDIAN TRAFFIC FLOW ON MOTORCYCLE PATH OF TRAVEL (ONE HOUR)

| Vehicle Type | Median Hourly Flow | Relative Frequency (%) | Cumulative Frequency (%) |
|-------------------------|--------------------|------------------------|--------------------------|
| Motorcycles | 1.4 | 0.5 | 0.5 |
| Full Size Cars | 131.0 | 45.7 | 46.2 |
| compact cars | 43.0 | 15.0 | 61.2 |
| Subcompact Cars | 70.3 | 24.5 | 85.7 |
| Pickups and Vans | 35.4 | 12.4 | 98.1 |
| Trucks and Buses | 5.0 | 1.7 | 99.9 |
| Others | 0.4 | 0.1 | 100.0 |
| TOTAL | 286.5 | 100.0 | |

Median traffic flow in one hour (1/2 hour before and 1/2 hour after the reference accident time) along the other vehicle path of travel for each category is shown in Table 10.3.2.

TABLE 10.3.2. MEDIAN TRAFFIC FLOW ON OTHER VEHICLE PATH OF TRAVEL (ONE HOUR)

| Vehicle Type | Median Hourly Flow | Relative Frequency (%) | Cumulative Frequency (%) |
|--------------------|--------------------|------------------------|--------------------------|
| Motorcycles | 0.0 | 0.0 | 0.0 |
| Full Size Cars | 15.2 | 44.1 | 44.1 |
| compact cars | 5.7 | 16.5 | 60.6 |
| Subcompact Cars | 2.9 | 25.8 | 86.4 |
| Pickups and Vans | 4.2 | 12.2 | 98.6 |
| Trucks and Buses | 0.5 | 1.4 | 100.0 |
| Others | 0.0 | 0.0 | 100.0 |
| TOTAL | 34.5 | 100.0 | |

10.4 Weather

As in the accident data, clear weather conditions prevailed in the great majority of the exposure cases. Inclement weather accounted for 2.0% of the cases. These data are shown in Table 10.4.1. Cloudy and overcast conditions accounted for 18.6% of the exposure scenes and 14.2% of the accident cases. Rain and drizzle are equally represented in accident and exposure cases.

Temperatures taken at the time of exposures ranged from 35°F to 98°F with a median temperature of 68.3°F. The distribution of temperatures is shown in Table 10.4.2.

TABLE 10.4.1. WEATHER CONDITION AT EXPOSURE SITE

A. Motorcycle Rider Basis

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Clear | 1. | 1925 | 83.4 | 83.4 | 83.4 |
| Rain | 2. | 3 | 0.1 | 0.1 | 83.5 |
| Drizzle | 3. | 3 | 0.1 | 0.1 | 83.6 |
| Cloudy or Partiy Cloudy | 7. | 341 | 14.8 | 14.8 | 98.4 |
| Overcast | 8. | 38 | 1.6 | 1.6 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

B. Exposure Site Basis

| | | | | | |
|-------------------------|-------|-----|-------|-------|-------|
| Clear | 1. | 401 | 79.4 | 79.4 | 79.4 |
| Rain | 2. | 5 | 1.0 | 1.0 | 80.4 |
| Drizzle | 3. | 5 | 1.0 | 1.0 | 81.4 |
| Cloudy or Partly Cloudy | 7. | 76 | 15.0 | 15.0 | 96.4 |
| overcast | 8. | 18 | 3.6 | 3.6 | 100.0 |
| | TOTAL | 505 | 100.0 | 100.0 | |

TABLE 10.4.2. TEMPERATURE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| 31-40°F | I 4. | 16 | 0.7 | 0.7 | 0.7 |
| 41-50°F | 5. | 104 | 4.5 | 4.5 | 5.2 |
| 51-60°F | 6. | 372 | 16.1 | 16.1 | 21.3 |
| 61-70°F | 7. | 882 | 38.2 | 38.2 | 59.5 |
| 71-80°F | 8. | 615 | 26.6 | 26.6 | 86.1 |
| 81-90°F | 9. | 269 | 11.6 | 11.6 | 97.7 |
| 91-100°F | 10. | 52 | 2.3 | 2.3 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Vehicle Data

Motorcycles passing each exposure site were photographed whenever possible and later identified. Photographs were not always possible as in heavy traffic or night-freeway conditions. These photographs were analyzed for type, size, manufacturer, year, modifications, color and so on.

The motorcycles passing exposure sites were mostly street bikes (as opposed to choppers, **enduros**, etc.) with a displacement of **500cc or more**. The motorcycles were usually newer - less than five years old; a large proportion had some soft of modification, and a majority (64.2%) had the headlamp on.

10.5 Motorcycle Size and Type

The distribution of engine displacements is shown in Table 10.5.1. Displacements of **50cc** or less usually reflect mopeds, while very large displacements (**1500cc** and up) are indicative of 3-wheeled motorcycles with automobile engines. The median displacement is **625cc**, while **750cc** motorcycles account for nearly one-fourth of those identified.

Motorcycles were classified as in the accident data, except that mopeds and official police motorcycles were given their own categories. The great majority of the motorcycles were street bikes. **Enduro-type motorcycles** accounted for **5.1%** of the exposure cases, but **more** than twice that number of accident cases. **Semi-choppers are similarly** over-represented in accident cases as shown in Table 10.5.2.

10.6 Manufacturer of Motorcycles

Motorcycle manufacturers are listed in Table 10.6.1.

10.7 Year of Manufacture, or Model Year

The model year or year of manufacture was determined from examination of the motorcycle or photographs. The distribution of years is shown in Table 10.7.1.

10.8 Predominating Color of the Motorcycle

The distribution of motorcycle predominating color is shown in Table 10.8.1.

10.9 Motorcycle Modifications

Motorcycles passing each exposure site were evaluated for modifications to the front suspension, handlebars, seat, rear wheel and exhaust system, or the addition of crash bars, a sissybar, fairing and/or windshield. Approximately 92% of the motorcycles passing exposure sites were thus evaluated; of those:

TABLE 10.5.1. MOTORCYCLE MODEL SIZE OR ENGINE DISPLACEMENT, CC.

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) | |
|--------------------------|----------------|--------------------|------------------------|------------------------|--------------------------|------|
| Size or Displacement, cc | 49. | 1 | 0.0 | 0.0 | 0.0 | |
| | 50. | 90 | 3.9 | 4.3 | 4.4 | |
| | 60. | 1 | 0.0 | 0.0 | 4.4 | |
| | 70. | 3 | 0.1 | 0.1 | 4.6 | |
| | 75. | 1 | 0.0 | 0.0 | 4.6 | |
| | 80. | 3 | 0.1 | 0.1 | 4.8 | |
| | 90. | 22 | 1.0 | 1.1 | 5.8 | |
| | 100. | 20 | 0.9 | 1.0 | 6.8 | |
| | 125. | 36 | 1.6 | 1.7 | 8.5 | |
| | 150. | 1 | 0.0 | 0.0 | 8.6 | |
| | 160. | 2 | 0.1 | 0.1 | 8.7 | |
| | 175. | 38 | 1.6 | 1.8 | 10.5 | |
| | 185. | 14 | 0.6 | 0.7 | 11.2 | |
| | 200. | 40 | 1.7 | 1.9 | 13.1 | |
| | 250. | 42 | 1.8 | 2.0 | 15.1 | |
| | 300. | 1 | 0.0 | 0.0 | 15.2 | |
| | 350. | 118 | 5.1 | 5.7 | 20.8 | |
| | 360. | 79 | 3.4 | 3.8 | 24.6 | |
| | 380. | 7 | 0.3 | 0.3 | 25.0 | |
| | 400 | 173 | 7.5 | 8.3 | 33.3 | |
| | 450. | 45 | 1.9 | 2.2 | 35.5 | |
| | 500. | 107 | 4.6 | 5.1 | 40.6 | |
| | 550. | 128 | 5.5 | 6.2 | 46.8 | |
| | 600. | 5 | 0.2 | 0.2 | 47.0 | |
| | Median = 625cc | 650. | 123 | 5.3 | 5.9 | 52.9 |
| | | 750. | 490 | 21.2 | 23.6 | 76.5 |
| | | 800. | 1 | 0.0 | 0.0 | 76.6 |
| | | 850. | 21 | 0.9 | 1.0 | 77.6 |
| | | 900. | 45 | 1.9 | 2.2 | 79.7 |
| | | 1000. | 214 | 9.3 | 10.3 | 90.0 |
| | 1100. | 14 | 0.6 | 0.7 | 90.7 | |
| | 1200. | 186 | 8.1 | 9.0 | 99.7 | |
| | 1340. | 1 | 0.0 | 0.0 | 99.7 | |
| | 1500. | 1 | 0.0 | 0.0 | 99.8 | |
| | 1600. | 1 | 0.0 | 0.0 | 99.8 | |
| | 1650. | 2 | 0.1 | 0.1 | 99.9 | |
| | 1700. | 1 | 0.0 | 0.0 | 100.0 | |
| Unknown | 9998. | 233 | 10.0 | MISSING | 100.0 | |
| | TOTAL | 2310 | 100.0 | 100.0 | | |

TABLE 10.5.2. MOTORCYCLE TYPE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| Street OEM | 1. | 1764 | 76.4 | 76.4 |
| Dirt | 2. | 14 | 0.6 | 0.6 |
| Enduro | 3. | 118 | 5.1 | 5.1 |
| Semi-Chopper | 4. | 88 | 3.8 | 3.8 |
| Chopper | 5. | 115 | 5.0 | 5.0 |
| Cafe Pacer | 6. | 11 | 0.5 | 0.5 |
| Trike | 7. | 11 | 0.5 | 0.5 |
| Moped | 8. | 58 | 4.2 | 4.2 |
| Police Motorcycle | 9. | 91 | 3.9 | 3.9 |
| | TOTAL | 2310 | 100.0 | 100.0 |

- (1) 10.6% had modifications to the front suspension
- (2) 27.3% had modified exhaust systems
- (3) 14.1% **had** a modified rear wheel
- (4) 18.1% were equipped with crash bars
- (5) 29.8% had **a sissybar**
- (6) 23.1% had a modified seat
- (7) 19.5% were equipped with a windshield (with or without fairing)
- (8) 12.3% were equipped with a fairing
- (9) 24.8% had modified handlebars

10.10 Headlamp Usage

Headlamp use was determined for 88.1% of the motorcycles passing exposure sites. Of those for which headlamp function was determined, 72.8% had the headlamp on, as shown in Table 10.10.1.

However, 1978 & 1979 model year street motorcycles are equipped with a headlamp that is operating automatically when the ignition switch is on. Most 1977 and earlier models have the headlamp use determined by headlamp switch operated as a matter of rider choice, of course, a few pre-1978 models, such as the 1977 Honda **CB750K**, were equipped with such **an** "automatic-on" function. These were present in the accident data collection and account for a portion of those data. Non-operation of the headlamp in 1978 and 1979 models can represent some failure in the electrical system or the intentional defeating of the "automatic-on"

TABLE 10.6.1. MOTORCYCLE MANUFACTURER

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|--------------|--------------------|------------------------|------------------------|
| Ariel | 2. | 3 | 0.1 | 0.1 |
| BMW | 3. | 60 | 2.6 | 2.8 |
| BSA | 4. | 6 | 0.3 | 0.3 |
| Bridgestone | 5. | 1 | 0.0 | 0.0 |
| Bultaco | 6. | 1 | 0.0 | 0.0 |
| Cushman | 11. | 6 | 0.3 | 0.3 |
| Ducati | 14. | 2 | 0.1 | 0.1 |
| Harley-Davidson | 20. | 241 | 10.4 | 11.4 |
| Hercules | 21. | 1 | 0.0 | 0.0 |
| Honda | 23. | 1011 | 43.8 | 47.7 |
| Indian | 25. | 1 | 0.0 | 0.0 |
| Kawasaki | 28. | 223 | 9.7 | 10.5 |
| Maico | 31. | 1 | 0.0 | 0.0 |
| Matchless | 32. | 1 | 0.0 | 0.0 |
| Moto Guzzi | 35. | 31 | 1.3 | 1.5 |
| Norton | 40. | 8 | 0.3 | 0.4 |
| Puch | 44. | 14 | 0.6 | 0.7 |
| Suzuki | 54. | 154 | 6.7 | 7.3 |
| Triumph | 55. | 44 | 1.9 | 2.1 |
| H-D Trike | 56. | 3 | 0.1 | 0.1 |
| Trike, VW Engine | 57. | 4 | 0.2 | 0.2 |
| Vespa | 60. | 18 | 0.8 | 0.8 |
| Yamaha | 62. | 243 | 10.5 | 11.5 |
| Motobecane | 65. | 39 | 1.7 | 1.8 |
| Beta | 67. | 1 | 0.0 | 0.0 |
| Other | 97. | 2 | 0.1 | 0.1 |
| Unknown | 98. | 191 | 8.3 | MISSING |
| | TOTAL | 2310 | 100.0 | 100.0 |

TABLE 10.7.1. MOTORCYCLE MODEL YEAR

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| 19__ | 41. | 2 | 0.1 | 0.1 | 0.1 |
| | 48. | 1 | 0.0 | 0.1 | 0.2 |
| | 50. | 2 | 0.1 | 0.1 | 0.3 |
| | 53. | 1 | 0.0 | 0.1 | 0.4 |
| | 56. | 1 | 0.0 | 0.1 | 0.4 |
| | 57. | 1 | 0.0 | 0.1 | 0.5 |
| | 58. | 1 | 0.0 | 0.1 | 0.5 |
| | 59. | 1 | 0.0 | 0.1 | 0.6 |
| | 60. | 1 | 0.0 | 0.1 | 0.6 |
| | 61. | 1 | 0.0 | 0.1 | 0.7 |
| | 62. | 4 | 0.2 | 0.2 | 0.9 |
| | 64. | 1 | 0.0 | 0.1 | 1.0 |
| | 65. | 6 | 0.3 | 0.4 | 1.3 |
| | 66. | 6 | 0.3 | 0.4 | 1.7 |
| | 67. | 5 | 0.2 | 0.3 | 2.0 |
| | 68. | 9 | 0.4 | 0.5 | 2.5 |
| | 69. | 19 | 0.8 | 1.1 | 3.6 |
| | 70. | 41 | 1.8 | 2.4 | 6.0 |
| | 71. | 45 | 1.9 | 2.6 | 8.7 |
| | 72. | 80 | 3.5 | 4.7 | 13.4 |
| 73. | 94 | 4.1 | 5.5 | 18.9 | |
| 74. | 113 | 4.9 | 6.6 | 25.5 | |
| 75. | 231 | 10.0 | 13.5 | 39.0 | |
| 76. | 213 | 9.2 | 12.5 | 51.4 | |
| 77. | 300 | 13.0 | 17.5 | 69.1 | |
| 78. | 472 | 20.4 | 27.7 | 96.8 | |
| 79. | 53 | 2.3 | 3.1 | 100.0 | |
| Unknown | 98. | 604 | 26.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.8.1. MOTORCYCLE PREDOMINATING COLOR

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| white | 1. | 142 | 6.1 | 7.2 | 7.2 |
| Yellow | 2. | 69 | 3.0 | 3.5 | 10.7 |
| Orange | 4. | 115 | 5.0 | 5.8 | 16.6 |
| Black | 5. | 489 | 21.2 | 24.8 | 41.4 |
| Brown | | 96 | 4.2 | 4.9 | 46.3 |
| Blue | 6. | 335 | 14.5 | 17.0 | 63.3 |
| Red | 7. | 414 | 17.9 | 21.0 | 84.3 |
| Purple | 8. | 31 | 1.3 | 1.6 | 85.9 |
| Green | 9. | 115 | 5.0 | 5.8 | 91.7 |
| Silver-Gray | 10. | 97 | 4.2 | 4.9 | 96.6 |
| Gold | 11. | 48 | 2.1 | 2.4 | 99.1 |
| Chrome-Metal Flake | 12. | 4 | 0.2 | 0.2 | 99.3 |
| Others | 97. | 14 | 0.6 | 0.7 | 100.0 |
| Unknown | 98. | 341 | 14.8 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.10.1. MOTORCYCLE HEADLAMP USE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| On | 1. | 1483 | 64.2 | 72.8 | 72.8 |
| Off | 2. | 553 | 23.9 | 27.2 | 100.0 |
| unknown | 8. | 274 | 11.9 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

system by the rider. For these reasons, headlamp use **was** distinguished for these 1978-1979 models. Table 10.10.2, summarizes data to show that 1978-1979 models accounted for 30.8% of those for which model year was identified.

Table 10.10.3 provides a crosstabulation to show headlamp usage for all vehicle data collected: Daylight, Dusk-Dawn and Night are combined. The **pre-**1978 models were determined to have the headlamp on in 64% of the observations, while 1978-1979 models had the headlamp on in 84.4%.

Of course, headlamp usage would be expected to vary with ambient lighting, being higher at night and lower in daytime. For this reason, separate **cross-**tabulations of model year and headlamp use were made for each of the three major ambient conditions, daylight, dusk-dawn and night. Table 10.10.4 shows the distribution of motorcycle observations under the various ambient light conditions. "Night-Lighted" and "Night-Unlighted" have been collapsed here into a single "Night-Time" category.

TABLE 10.10.2. MOTORCYCLE MODEL YEAR CATEGORY:
PRE-1978, 1978 & 1979

| Category Label | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------|--------------------|------------------------|------------------------|
| Pre-1978 | 1182 | 51.2 | 69.2 |
| 1978 & 1979 | 525 | 22.7 | 30.8 |
| Unknown | 603 | 26.1 | MISSING |
| TOTAL | 2310 | 100.0 | 100.0 |

TABLE 10.10.3. HEADLAMP USE BY MODEL YEAR
ALL AMBIENT LIGHTING CONDITIONS

| Model Year | COUNT ROW PCT COL PCT TOT PCT | Headlamp Use | | | Total |
|---------------------|--|--------------|------------|-------------|-------|
| | | On | Off | Unknown | |
| Pre-1978 | 757 | 352 | 73 | 1182 | |
| | 64.0 | 29.8 | 6.2 | 51.2 | |
| | 51.0 | 63.7 | 26.6 | | |
| 1978-1979 | -32.8 | 15.2 | 3.2 | | |
| | 443 | 51 | 31 | 525 | |
| | 84.4 | 9.7 | 5.9 | 22.7 | |
| Unknown | 29.9 | 9.2 | 11.3 | | |
| | 19.2 | 2.2 | 1.3 | | |
| | 283 | 150 | 170 | 603 | |
| | 46.9 | 24.9 | 28.2 | 26.1 | |
| | 19.1 | 27.1 | 62.0 | | |
| | 12.3 | 6.5 | 7.4 | | |
| Column Total | 1483 | 553 | 274 | 2310 | |
| | 64.2 | 23.9 | 11.9 | 100.0 | |

Daylight Headlamp Use

Of 1671 motorcycles passing exposure sites in daylight, model year was determined for 79.9%. Approximately one-fourth of the total were identified as 1978-1979 models as shown in Table 10.10.5. Headlamp use was identified for these motorcycles; Table 10.10.6 shows that at least 60.2% had the headlamp on in daylight.

These data are crosstabulated to show daylight headlamp use or non-use for 1978-1979 model years versus earlier years. Table 10.10.7 shows that at least 59.4% of the pre-1978 motorcycles had the headlamp on in daylight while at least 82.3% of the 1978-1979 motorcycles (with the automatic-on headlamp function) had the headlamp operating.

TABLE 10.10.4. AMBIENT LIGHTING CONDITIONS

A. At Exposure Sites:

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|----------------|-------|--------------------|------------------------|
| Daylight | 1. | 370 | 73.3 |
| Dusk-Dawn | 2. | 40 | 7.9 |
| Night | 3,4. | 95 | 18.8 |
| | TOTAL | 505 | 100.0 |

B. Tabulation by Motorcycles:

| Category Label | Code | Absolute Frequency | Relative Frequency (%) |
|-----------------|-------------|--------------------|------------------------|
| Daylight | 1. | 1671 | 72.3 |
| Dusk-Dawn | 2. | 307 | 13.3 |
| Night | 3,4. | 332 | 14.4 |
| | TOTAL | 2310 | 100.0 |

TABLE 10.10.5. MOTORCYCLE YEAR CATEGORY: DAYLIGHT EXPOSURE DATA

| Motorcycle Year | Absolute Frequency | Relative Frequency (%) |
|-----------------|--------------------|------------------------|
| Pm-1978 | 911 | 54.5 |
| 1978-1979 | 424 | 25.4 |
| Unknown | 336 | 20.1 |
| TOTAL | 1671 | 100.0 |

TABLE 10.10.6. HEADLAMP USE IN DAYLIGHT

| Headlamp Use | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------|--------------------|------------------------|------------------------|
| On | 1006 | 60.2 | 68.5 |
| Off | 463 | 27.7 | 31.5 |
| Unknown | 202 | 12.1 | MISSING |
| TOTAL | 1671 | 100.0 | 100.0 |

TABLE 10.10.7. DAYLIGHT HEADLAMP USE BY MODEL YEAR CATEGORY

| Model Year | COUNT ROW PCT COL PCT TOT PCT | Headlamp Use | | | Total |
|-----------------|--|--------------|------|---------|-------|
| | | On | Off | Unknown | |
| Pre-1978 | 541 | 311 | 59 | 911 | |
| | 59.4 | 34.1 | 6.5 | 54.5 | |
| | 53.8 | 67.2 | 29.2 | | |
| | 32.4 | 18.6 | 3.5 | | |
| 1978-1979 | 349 | 47 | 28 | 424 | |
| | 82.3 | 11.1 | 6.6 | 25.4 | |
| | 34.7 | 10.2 | 13.9 | | |
| | 20.9 | 2.8 | 1.7 | | |
| Unknown | 116 | 105 | 115 | 336 | |
| | 34.5 | 31.3 | 34.2 | 20.1 | |
| | 11.5 | 22.7 | 56.9 | | |
| | 6.9 | 6.3 | 6.9 | | |
| Column Total | 1006 | 463 | 202 | 1671 | |
| | 60.2 | 27.7 | 12.1 | 100.0 | |

Dusk-Dawn Headlamp Use

Model year and headlamp use were identified for the 307 motorcycles that passed exposure sites in dusk-dawn lighting conditions. Table 10.10.8 shows the breakdown of model year for these motorcycles.

TABLE 10.10.8. MOTORCYCLE MODEL YEAR CATEGORY:
DUSK-DAWN EXPOSURE DATA

| Motorcycle Year | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|--------------------|------------------------|------------------------|
| Pre-1978 | 135 | 44.0 | 73.4 |
| 1978-1979 | 48 | 15.6 | 26.6 |
| Unknown | 124 | 40.4 | MISSING |
| TOTAL | 307 | 100.0 | 100.0 |

Headlamp use in dusk-dawn lighting is shown in Table 10.10.9. Surprisingly, the headlamp was identified as being on only slightly more than in daytime.

The dusk-dawn data for headlamp use by motorcycle year are crosstabulated in Table 10.10.10. These data show that pre-1978 models had the headlamp on 68.9% of the time; for 1978-1979 models the headlamp was on 87.5% of the time.

TABLE 10.10.9. DUSK-DAWN HEADLAMP USE

| Headlamp Use | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------|--------------------|------------------------|------------------------|
| On | 188 | 61.2 | 71.2 |
| Off | 76 | 24.8 | 28.8 |
| Unknown | 43 | 14.0 | MISSING |
| TOTAL | 307 | 100.0 | 100.0 |

TABLE 10.10.10. DUSK-DAWN HEADLAMP USE BY MODEL YEAR CATEGORY

| Model Year | COUNT ROW PCT COL PCT TOT PCT | Headlamp Use | | | Total |
|---------------------|--|--------------|------|---------|-------|
| | | On | Off | Unknown | |
| Pre-1978 | 93 | 31 | 11 | 135 | |
| | 68.9 | 23.0 | 8.1 | 44.0 | |
| | 49.5 | 40.8 | 25.6 | | |
| | 30.3 | 10.1 | 3.6 | | |
| 1978-1979 | 42 | 3 | 3 | 48 | |
| | 87.5 | 6.3 | 6.3 | 15.6 | |
| | 22.3 | 3.9 | 7.0 | | |
| | 13.7 | 1.0 | 1.0 | | |
| Unknown | 53 | 42 | 29 | 124 | |
| | 42.7 | 33.9 | 23.4 | 40.4 | |
| | 28.2 | 55.3 | 67.4 | | |
| | 17.3 | 13.7 | 9.4 | | |
| Column Total | 188 | 76 | 43 | 307 | |
| | 61.2 | 24.8 | 14.0 | 100.0 | |

Headlamp Use at Night

A total of 332 motorcycles passed exposure sites at night. The model year was identified for 189 (56.9%); of those identified 28% were 1978-1979 models, as shown in Table 10.10.11.

Of the 332 motorcycles passing exposure sites at night, headlamp function was identified for 303 (92.1%). Of these, the headlamp was on 95.4% of the time. The data are shown in Table 10.10.12.

The data from these tables were crosstabulated to separate headlamp use by model year for night exposures. This data appears in Table 10.10.13, which shows 98.1% headlamp use for 1978-1979 models and 90.4% use for the pre-1978 years. Of the pre-1978 models, 1 in 14 had the headlamp off at night, while only 1 in 53 of the 1978-1979 models was so identified.

TABLE 10.10.11. MOTORCYCLE MODEL YEAR CATEGORY:
NIGHT EXPOSURE DATA

| Motorcycle Year | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------|--------------------|------------------------|------------------------|
| Pre-1978 | 136 | 41.0 | 72.0 |
| 1978-1979 | 53 | 16.0 | 28.0 |
| unknown | 143 | 43.1 | MISSING |
| TOTAL | 332 | 100.0 | 100.0 |

TABLE 10.10.12. HEADLAMP USE AT NIGHT

| Headlamp Use | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------|--------------------|------------------------|------------------------|
| On | 289 | 87.0 | 95.4 |
| Off | 14 | 4.2 | 4.6 |
| Unknown | 29 | 8.7 | MISSING |
| TOTAL | 332 | 100.0 | 100.0 |

TABLE 10.10.13. NIGHT HEADLAMP USE BY MODEL YEAR CATEGORY

| Model Year | COUNT ROW PCT COL PCT TOT PCT | Headlamp Use | | | Total |
|--------------|--|--------------|------|---------|-------|
| | | On | Off | Unknown | |
| Pre-1978 | 123 | 10 | 3 | 136 | |
| | 90.4 | 7.4 | 2.2 | 41.0 | |
| | 42.6 | 71.4 | 10.3 | | |
| 1978-1979 | 37.0 | 3.0 | 0.9 | 53 | |
| | 52 | 1 | 0 | 53 | |
| | 98.1 | 1.9 | 0.0 | 16.0 | |
| Unknown | 18.0 | 7.1 | 0.0 | | |
| | 15.7 | 0.3 | 0.0 | | |
| | 114 | 3 | 26 | 143 | |
| | 79.7 | 2.1 | 18.2 | 43.1 | |
| | 39.4 | 21.4 | 89.7 | | |
| | 34.3 | 0.9 | 7.8 | | |
| Column Total | 289 | 14 | 29 | 332 | |
| | 87.0 | 4.2 | 8.7 | 100.0 | |

Summary of Headlamp and Illumination Data

The exposure data suggest a relatively high level of headlamp use: Headlamp use and model year were identified for 1603 motorcycles, of which 1200 (74.9%) **had the headlamp** on. Even for model years where headlamp use is largely a matter of rider choice the headlamp **was** on in at least 60.2% of the observations.

Human Factors

10.11 Motorcycle Rider Age

Ages of riders were determined for 27% of the riders passing exposure sites. The ages ranged from **12-73** years, and the median age was 26.7 years. The largest portion (70%) of riders fell in the 18-34 age bracket. These data are shown in Table **10.11.1**.

10.12 Motorcycle Rider Sex, Marital Status, Children

Rider sex was determined from photos and interviews for 90% of those passing exposure sites. Females accounted for 1.5%. The distribution is shown in Table 10.12.1.

The data on marital status of riders passing exposure **sites** is shown in Table **10.12.2**. The number of children reported by these riders is shown in Table 10.12.3.

10.13 Motorcycle Rider Height and Weight

Rider height **was** determined in 27.3% of the exposure cases. The median height in these **cases** was 69.4 inches. The distribution is shown in Table 10.13.1 (Appendix).

Rider weights in the exposure study were very similar to the accident data; the median weight in exposure cases was 159.9 pounds. The data are shown in Table 10.13.2 (Appendix D.1).

10.14 Motorcycle Rider Occupation and Education

Riders interviewed in the exposure study were employed primarily in crafts, service and professional occupations; another large group **was** primarily students. The distribution is shown in Table 10.14.1.

The highest level of formal education attained by the riders in the exposure study **was** typically partial college education; however, only 17.6% had completed college. The median level of education was approximately 1/2 year of college. The distribution is shown in Table 10.14.2.

TABLE 10.11.1. MOTORCYCLE RIDER AGE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Age, years | 12. | 1 | 0.0 | 0.2 | 0.2 |
| | 13. | 2 | 0.1 | 0.3 | 0.5 |
| | 14. | 2 | 0.1 | 0.3 | 0.8 |
| | 16. | 11 | 0.5 | 1.8 | 2.6 |
| | 17. | 17 | 0.7 | 2.7 | 5.3 |
| | 18. | 25 | 1.1 | 4.0 | 9.3 |
| | 19. | 36 | 1.6 | 5.8 | 15.1 |
| | 20. | 19 | 0.8 | 3.0 | 18.1 |
| | 21. | 30 | 1.3 | 4.8 | 22.9 |
| | 22. | 27 | 1.2 | 4.3 | 27.2 |
| | 23. | 39 | 1.7 | 6.3 | 33.5 |
| | 24. | 29 | 1.3 | 4.6 | 38.1 |
| | 25. | 32 | 1.4 | 5.1 | 43.3 |
| | 26. | 26 | 1.1 | 4.2 | 47.4 |
| | 27. | 22 | 1.0 | 3.5 | 51.0 |
| | 28. | 40 | 1.7 | 6.4 | 57.4 |
| | 29. | 18 | 0.8 | 2.9 | 60.3 |
| | 30. | 19 | 0.8 | 3.0 | 63.3 |
| | 31. | 29 | 1.3 | 4.6 | 67.9 |
| | 32. | 25 | 1.1 | 4.0 | 72.0 |
| | 33. | 25 | 1.1 | 4.0 | 76.0 |
| | 34. | 21 | 0.9 | 3.4 | 79.3 |
| | 35. | 6 | 0.3 | 1.0 | 80.3 |
| | 36. | 13 | 0.6 | 2.1 | 82.4 |
| | 37. | 18 | 0.8 | 2.9 | 85.3 |
| | 38. | 5 | 0.2 | 0.8 | 86.1 |
| | 39. | 10 | 0.6 | 1.6 | 87.7 |
| | 40. | 10 | 0.4 | 1.6 | 89.3 |
| | 41. | 4 | 0.2 | 0.6 | 89.9 |
| | 42. | 3 | 0.3 | 1.3 | 91.2 |
| | 43. | 6 | 0.1 | 0.5 | 91.7 |
| | 44. | | 0.3 | 1.0 | 92.6 |
| | 45. | 2 | 0.1 | 0.3 | 92.9 |
| | 46. | 3 | 0.1 | 0.5 | 93.4 |
| | 47. | 13 | 0.6 | 2.1 | 95.5 |
| | 48. | 3 | 0.1 | 0.5 | 96.0 |
| | 49. | 3 | 0.1 | 0.5 | 96.5 |
| | 51. | 1 | 0.0 | 0.2 | 96.6 |
| | 52. | 2 | 0.1 | 0.3 | 97.0 |
| | 53. | 5 | 0.2 | 0.8 | 97.8 |
| | 55. | 2 | 0.1 | 0.3 | 98.1 |
| | 56. | 1 | 0.0 | 0.2 | 98.2 |
| | 57. | 2 | 0.1 | 0.3 | 98.6 |
| | 59. | 1 | 0.0 | 0.2 | 95.7 |
| | 61. | 2 | 0.1 | 0.3 | 99.0 |
| | 64. | 2 | 0.1 | 0.3 | 99.4 |
| | 65. | 1 | 0.0 | 0.2 | 99.5 |
| | 68. | 1 | 0.0 | 0.2 | 99.7 |
| 71. | 1 | 0.0 | 0.2 | 99.8 | |
| 73. | 1 | 0.0 | 0.2 | 100.0 | |
| Unknown | 98. | 1686 | 73.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.12.1. MOTORCYCLE RIDER SEX

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Male | 1. | 2045 | 88.5 | 98.4 | 98.4 |
| Female | 2. | 32 | 1.4 | 1.5 | 100.0 |
| Not Observed | 3. | 1 | 0.0 | 0.0 | 100.0 |
| Unknown | 8. | 232 | 10.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.12.2. RIDER MARITAL STATUS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-------------------|-------|--------------------|------------------------|------------------------|
| Single | 1. | 373 | 16.1 | 59.6 |
| Married | 2. | 188 | 8.1 | 30.0 |
| Separated | 3. | 16 | 0.7 | 2.6 |
| Divorced | 4. | 34 | 1.5 | 5.4 |
| Widowed | 5. | 4 | 0.2 | 0.6 |
| Cohabiting | 6. | 11 | 0.5 | 1.8 |
| Not Observed | 8. | 1684 | 72.9 | MISSING |
| | TOTAL | 2310 | 100.0 | 100.0 |

TABLE 10.12.3. NUMBER OF CHILDREN

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|--------------------|-----------|--------------------|------------------------|------------------------|
| Number of children | 0. | 418 | 18.1 | 67.4 |
| | 1. | 69 | 3.0 | 11.1 |
| | 2. | 80 | 3.5 | 12.9 |
| | 3. | 29 | 1.3 | 4.7 |
| | 4. | 14 | 0.6 | 2.3 |
| | 5. | 8 | 0.3 | 1.3 |
| | 6. | 1 | 0.0 | 0.2 |
| Seven Or More | 7. | 1 | 0.0 | 0.2 |
| Not Observed | 8. | 1690 | 73.2 | MISSING |
| | TOTAL | 2310 | 100.0 | 100.0 |

TABLE 10.14.1. MOTORCYCLE RIDER OCCUPATION

| category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|-----------------------|---------------|--------------------|------------------------|------------------------|
| Professional | 1. | 102 | 4.4 | 15.0 |
| Administrator | 2. | 42 | 1.8 | 6.2 |
| Sales Worker | 3. | 39 | 1.7 | 5.8 |
| Clerical | 4. | 44 | 1.9 | 6.5 |
| Craftsman | 5. | 148 | 6.4 | 21.8 |
| operative | 6. | 15 | 0.6 | 2.2 |
| Transport Operative | 7. | 19 | 0.8 | 2.8 |
| Laborer | 8. | 66 | 2.9 | 9.7 |
| Farm Laborer | 10. | 1 | 0.0 | 0.1 |
| Service Worker | 11. | a3 | 3.6 | 12.2 |
| Household Worker | 12. | 1 | 0.0 | 0.1 |
| Student | 14. | 89 | 3.9 | 13.1 |
| Military | 15. | 3 | 0.1 | 0.4 |
| Retired | 16. | 7 | 0.3 | 1.0 |
| Unemployed-over 1 Mo. | 17. | 19 | 0.8 | 2.8 |
| Unknown | 98. | 1632 | 70.6 | MISSING |
| | TOTAL, | 2310 | 100.0 | 100.0 |

TABLE 10.14.2. MOTORCYCLE RIDER EDUCATION STATUS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) |
|----------------------------|--------------|--------------------|------------------------|------------------------|
| Grad School-Professional | 1. | 26 | 1.1 | 4.2 |
| College-University | 2. | 83 | 3.6 | 13.4 |
| Partial College | 3.. | 237 | 10.3 | 38.2 |
| High School | 4.. | 165 | 7.1 | 26.6 |
| Partial High School | 5.. | 52 | 4.0 | 14.8 |
| Jr. High or Grammar School | 6.. | 14 | 0.6 | 2.3 |
| Less Than 7 Years | 7.. | 4 | 0.2 | 0.6 |
| Unknown | 8.. | 1689 | 73.1 | MISSING |
| | TOTAL | 2310 | 100.0 | 100.0 |

10.15 Motorcycle Rider License Qualification

Riders interviewed at exposure sites or responding to a follow-up questionnaire reported having the required Class 4 endorsement or a permit for motorcycle operation in 77.4% of the cases. This is shown in Table 10.15.1. Of those who did not have a license_ and the motorcycle endorsement, one third had a motorcycle permit (which restricts riding to daylight operation without a passenger), as shown in Table 10.15.2.

TABLE 10.15.1. DRIVER LICENSE CLASS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| No License | 0. | 33 | 1.4 | 4.9 | 4.9 |
| Class 1 | 1. | 14 | 0.6 | 2.1 | 6.9 |
| Class 2 | 2. | Y | 0.4 | 1.3 | 8.3 |
| Class 3 | 3. | 97 | 4.2 | 14.3 | 22.6 |
| Class 4 or Equip | 4. | 508 | 22.0 | 74.9 | 97.5 |
| Learner Permit | 5. | 17 | 0.7 | 2.5 | 100.0 |
| Unknown | 8. | 1632 | 70.6 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

**TABLE 10.15.2. DID OPERATOR HAVE MOTORCYCLE PERMIT?
(If No Class 4 License)**

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 44 | 1.9 | 33.3 | 33.3 |
| NO | 2. | 88 | 3.8 | 66.7 | 100.0 |
| Not Observed | 8. | 1642 | 71.1 | MISSING | 100.0 |
| N.A. | 9. | 536 | 23.2 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

The majority of riders held California Drivers Licenses; no other states contributed more than 1% to the riders interviewed. This is shown in Table 10.15.3 (Appendix D.1).

10.16 Motorcycle Rider Traffic Violation and Accident Experience

Riders responding to exposure data collection queries reported a low level of violation experience with police agencies. Over half reported having no citations for moving violations in the previous two years. Data are shown in Table 10.16.1.

TABLE 10.16.1. RIDER MOVING VIOLATIONS IN LAST 2 YEARS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 306 | 13.2 | 52.2 | 52.2 |
| | 1. | 116 | 5.0 | 19.8 | 72.0 |
| | 2. | 70 | 3.0 | 11.9 | 84.0 |
| | 3. | 39 | 1.7 | 6.7 | 90.6 |
| | 4. | 18 | 0.8 | 3.1 | 93.7 |
| | 5. | 12 | 0.5 | 2.0 | 95.7 |
| | 6. | 8 | 0.3 | 1.4 | 97.1 |
| More Than Six | 7. | 17 | 0.7 | 2.9 | 100.0 |
| unknown | a. | 1724 | 74.6 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Similarly, exposure study participants had a low level of accident involvement in the two previous years, as **shown** in Table 10.16.2.

TABLE 10.16.2. RIDER TRAFFIC ACCIDENTS IN LAST 2 YEARS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 440 | 19.0 | 76.0 | 76.0 |
| | 1. | 106 | 4.6 | 18.3 | 94.3 |
| | 2. | 23 | 1.0 | 4.0 | 98.3 |
| | 3. | 7 | 0.3 | 1.2 | 99.5 |
| | 4. | 1 | 0.0 | 0.2 | 99.7 |
| | 6. | 1 | 0.0 | 0.2 | 99.8 |
| More Than Six | 7. | 1 | 0.0 | 0.2 | 100.0 |
| Unknown | 8. | 1731 | 74.9 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.17 Motorcycle Rider Training Experience

As in the accident cases, riders in the exposure study show a preponderance of informal training, most being self-taught or learning from friends or family. This type of **informal** learning experience accounts for 84.3% of the participants in the exposure study. This figure re-emphasizes the haphazard **way** in which accurate information is transmitted to the novice rider. Conversations with riders at exposure sites **were** often littered in inaccurate information the rider had acquired in his "training." Most often, inaccurate information related to helmets, collision avoidance techniques and riding strategies.

If one were to believe many riders in the exposure study, use of the front brake will surely throw the rider right over the handlebars, while "laying it down" is the most effective way to avoid an accident. Such thinking is common when critical information is conveyed poorly or not at all.

The distribution of rider training backgrounds is shown in Table 10.17.1.

TABLE 10.17.1. RIDER MOTORCYCLE TRAINING EXPERIENCE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Self Taught | 0. | 382 | 16.5 | 57.0 | 57.0 |
| Friends-Family | 1. | 183 | 7.9 | 27.3 | 84.3 |
| School-Club | 2. | 68 | 2.9 | 10.1 | 94.5 |
| Formal-AMA AFM FIM | 3. | 36 | 1.6 | 5.4 | 99.9 |
| Others | 7. | 1 | 0.0 | 0.1 | 100.0 |
| unknown | a. | 1640 | 71.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.18 Motorcycle Rider Dirt Bike Experience

In the exposure study responding riders were classified as having no dirt riding experience (which included "once or twice on a friend's dirt bike"), moderate trail riding experience, or frequent or competition dirt riding experience. A majority, **58.5%**, reported having moderate to extensive dirt riding experience. The data are shown in Table 10.18.1.

TABLE 10.18.1. RIDER OFF-ROAD DIRT BIKE EXPERIENCE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 259 | 11.2 | 41.5 | 41.5 |
| Some Trail Bike Riding | 1. | 232 | 10.0 | 37.2 | 78.7 |
| Enduro-MX-Desert | 2. | 133 | 5.8 | 21.3 | 100.0 |
| unknown | a. | 1685 | 72.9 | MISSING | 100.0 |
| N.A. | 9. | 1 | 0.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.19 Motorcycle Rider Street Bike Experience

For the majority of responding riders in the exposure study, the motorcycle appears to be a major or sole form of transportation: It is ridden five or more days a week by 78.3% of those interviewed. The data are shown in Table 10.19.1.

TABLE 10.19.1. DAYS PER WEEK MOTORCYCLE RIDDEN

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| | 0. | 3 | 0.1 | 0.5 | 0.5 |
| | 1. | 27 | 1.2 | 4.1 | 4.6 |
| | 2. | 39 | 1.7 | 6.0 | 10.5 |
| | 3. | 45 | 1.9 | 6.9 | 17.4 |
| | 4. | 29 | 1.3 | 4.4 | 21.8 |
| | 5. | 134 | 5.8 | 20.5 | 42.3 |
| | 6. | 58 | 2.5 | 8.9 | 51.1 |
| | 7. | 320 | 13.9 | 48.9 | 100.0 |
| Unknown | 8. | 1655 | 71.7 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Riders participating in the exposure study reported having considerable motorcycle riding experience, the most frequent response being more than eight years. The median experience reported was 47.4 months. The data are shown in Table 10.19.2 (Appendix D.1).

Riders responding to exposure data collectors reported a median of nine months experience on the motorcycle they were riding at the time they were observed/interviewed. The data are shown in Table 10.19.3 (Appendix D.1).

10.20 Motorcycle Rider Familiarity with the Roadway

Nearly half the riders interviewed reported **travelling** the involved roadway at least daily (for police motorcyclists the figure was often hourly rather than daily). Over two-thirds, 68.82, reported travelling the involved roadway at least weekly, indicating a high level of familiarity with the area. These data are shown in Table 10.20.1.

TABLE 10.20.1. NUMBER OF TIMES ON INVOLVED ROADWAY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Never Before | 0. | 48 | 2.1 | 7.4 | 1.4 |
| Daily | 1. | 312 | 13.5 | 48.1 | 55.6 |
| 1-4 Times per Week | 2. | 134 | 5.8 | 20.7 | 76.2 |
| 1-3 Times per Month | 3. | 83 | 3.6 | 12.8 | 89.0 |
| 1-2 Times per Quarter | 4. | 24 | 1.0 | 3.7 | 92.7 |
| 1-3 Times per Year | 5. | 38 | 1.6 | 5.9 | 98.6 |
| Less than Annually | 6. | 9 | 0.4 | 1.4 | 100.0 |
| Unknown | 8. | 1662 | 71.9 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.21 Motorcycle Rider Hand Preference

The data on hand preference are shown in Table 10.21.1. This is comparable to the accident data although **more** than twice as many exposure study riders reported being ambidextrous.

TABLE 10.21.1. MOTORCYCLE RIDER HAND PREFERENCE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Right | 1. | 502 | 21.7 | 80.7 | 80.7 |
| Left | 2. | 69 | 3.0 | 11.1 | 91.8 |
| Ambidextrous | 3. | 51 | 2.2 | a.2 | 100.0 |
| Unknown | 8. | 1688 | 73.1 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.22 Motorcycle Rider Alcohol and Drug Involvement

Approximately one rider in six interviewed in the exposure study reported at least some alcohol or drug involvement. This was principally mild alcohol use or marijuana use (alcohol use was undoubtedly the ubiquitous "couple of beers"). Drug use was typically on a non-prescription basis.

Alcohol and drug use may have been somewhat higher than reported here. Questions about use of intoxicants came late in the interview, when the interviewer had had an opportunity to establish some rapport with the rider and reduce any perceived threat of being penalized for admitting to use of intoxicants. However, as interviewers might still present an unfamiliar and potentially official threat, **some** riders may have been reluctant to admit to alcohol or drug use. Data on drug and alcohol use are shown in Table 10.22.1.

TABLE 10.22.1. RIDER ALCOHOL-DRUG IMPAIRMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| HBD-Not Under Influence | 1. | 47 | 2.0 | 8.0 | 8.0 |
| HBD-Under Influence | 2. | 4 | 0.2 | 0.7 | 8.7 |
| HBD-Impairment Unknown | 3. | 9 | 0.4 | 1.5 | 10.2 |
| Under Drug Influence | 4. | 5 | 0.2 | 0.8 | 11.0 |
| Combination | 5. | 4 | 0.2 | 0.7 | 11.7 |
| Unknown | a. | 1725 | 74.7 | MISSING | MISSING |
| No Alcohol or Drug Involvement | 9. | 516 | 22.3 | 88.2 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Data on estimated blood alcohol levels are shown in Table 10.22.2. Levels were determined by calculations based upon the amount consumed, elapsed time and the rider's weight.

TABLE 10.22.2. RIDER BLOOD ALCOHOL LEVEL-ESTIMATED

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) | |
|------------------|----------------|--------------------|------------------------|------------------------|--------------------------|-------|
| Hundredths of 1% | 0. | 538 | 23.3 | 93.9 | 93.9 | |
| | 1. | 10 | 0.4 | 1.7 | 95.6 | |
| | 2. | 7 | 0.3 | 1.2 | 96.9 | |
| | 3. | 3 | 0.1 | 0.5 | 97.4 | |
| | 4. | 11 | 0.5 | 1.9 | 99.3 | |
| | 5. | 1 | 0.0 | 0.2 | 99.5 | |
| | 7. | 1 | 0.0 | 0.2 | 99.7 | |
| | 10. | 1 | 0.0 | 0.2 | 99.8 | |
| | 11. | 1 | 0.0 | 0.2 | 100.0 | |
| | Not Observed | 98. | 1721 | 74.5 | MISSING | 100.0 |
| | Not Applicable | 99. | 16 | 0.7 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | | |

Data illustrating prescription and non-prescription drug use are shown in Table 10.22.3.

TABLE 10.22.3. RIDER USE OF DRUGS OTHER THAN ALCOHOL
PRESCRIPTION/NON-PRESCRIPTION STATUS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 573 | 24.8 | 24.8 | 24.8 |
| Prescription | 1. | 12 | 0.5 | 0.5 | 25.3 |
| Non-Prescription | 2. | 40 | 1.7 | 1.7 | 27.1 |
| Not Observed | 8. | 1684 | 72.9 | 72.9 | 100.0 |
| N.A. | 9. | 1 | 0.0 | 0.0 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Table 10.22.4 classifies and tabulates the drugs reported used by riders interviewed in the exposure study.

10.23 Motorcycle Rider Permanent Physiological Impairment

Permanent disabilities were reported by very few riders, as shown in Table 10.23.1.

TABLE 10.22.4. RIDER USE OF DRUGS OTHER THAN ALCOHOL DRUG CATEGORY

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------------|------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 558 | 24.2 | 90.0 | 90.0 |
| Marijuana | 1. | 49 | 2.1 | 7.9 | 97.9 |
| Stimulants | 2. | 2 | 0.1 | 0.3 | 98.2 |
| Depressants | 3. | 7 | 0.3 | 1.1 | 99.4 |
| Antihistamines-Depress.. | 5. | 2 | 0.1 | 0.3 | 99.7 |
| Antihistamines-Stimuls. | 6. | 1 | 0.0 | 0.2 | 99.8 |
| Multiples-Incl. Alcohol | 7. | 1 | 0.0 | 0.2 | 100.0 |
| Not Observed | a. | 1689 | 73.1 | MISSING | 100.0 |
| N.A. | 9 | | 0.0 | MISSING | 100.0 |
| TOTAL | | 2310 | 100.0 | 100.0 | |

TABLE 10.23.1. RIDER PERMANENT PHYSIOLOGICAL IMPAIRMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------------|------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 2271 | 98.3 | 98.3 | 98.3 |
| Arthritis | 1. | 1 | 0.0 | 0.0 | 98.4 |
| Diabetes | 2. | 5 | 0.2 | 0.2 | 98.6 |
| Cardio-Vascular | 4. | 2 | 0.1 | 0.1 | 98.7 |
| Vision | 5. | 8 | 0.3 | 0.3 | 99.0 |
| Hearing | 6. | 8 | 0.3 | 0.3 | 99.4 |
| Others | 7. | 9 | 0.4 | 0.4 | 99.7 |
| Paraplegic, Amputees | 8. | 6 | 0.3 | 0.3 | 100.0 |
| TOTAL | | 2310 | 100.0 | 100.0 | |

Transient physical problems were reported infrequently, in about 10% of the riders interviewed. The data are shown in Table 10.23.2.

10.24 Motorcycle Rider Tattoos

The majority of riders interviewed claimed to have no tattoos, and these data are shown in Table 10.24.1.

10.25 Motorcycle Rider Attention to Driving Task

Wherever possible an attempt was made to evaluate where the rider's attention was directed when passing the exposure site. Those data are shown in Table 10.25.1.

TABLE 10.23.2. RIDER TRANSIENT PHYSIOLOGICAL IMPAIRMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 2239 | 96.9 | 96.9 | 96.9 |
| Fatigue | 1. | 12 | 0.5 | 0.5 | 97.4 |
| Hunger | 2. | 17 | 0.7 | 0.7 | 98.2 |
| Thirst | 3. | 19 | 0.8 | 0.8 | 99.0 |
| Elimination Urgency | 5. | 4 | 0.2 | 0.2 | 99.2 |
| Others | 7. | 7 | 0.3 | 0.3 | 99.5 |
| Muscle Spasm-Cramp | 8. | 8 | 0.3 | 0.3 | 99.8 |
| N.A. | 9. | 4 | 0.2 | 0.2 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.24.1. RIDER BODY TATTOOS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 489 | 21.2 | 84.2 | 84.2 |
| | 1. | 48 | 2.1 | 8.3 | 92.4 |
| | 2. | 12 | 0.5 | 2.1 | 94.5 |
| | 3. | a | 0.3 | 1.4 | 95.9 |
| | 4. | 11 | 0.5 | 1.9 | 97.8 |
| | 5. | 3 | 0.1 | 0.5 | 98.3 |
| | 6. | 7 | 0.3 | 1.2 | 99.5 |
| More Than Six | 7. | 3 | 0.1 | 0.5 | 100.0 |
| Not Observed | 8. | 1729 | 74.8 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.25.1. RIDER ATTENTION TO DRIVING TASK

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--|--------------|--------------------|------------------------|------------------------|--------------------------|
| Attention Diverted To Surrounding Traffic | 1. | 417 | 18.1 | 73.2 | 73.2 |
| Attention Diverted To Non-Traffic Item | 2. | 111 | 4.8 | 19.5 | 92.6 |
| Attention Diverted To Motorcycle Operation | 3. | 31 | 1.3 | 5.4 | 98.1 |
| Inattentive Mode | 4. | 11 | 0.5 | 1.9 | 100.0 |
| Not Observed | 8. | 475 | 20.6 | MISSING | 100.0 |
| N.A.-Attention Focused On Driving Task | 9. | 1265 | 54.8 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

In these observations, it was clearly necessary that the observer have extensive motorcycle experience as well as traffic law enforcement experience.

10.26 Motorcycle Rider Stress on Day of Interview

Of approximately six hundred riders interviewed, 77 or about 13% reported some type of stress at the time of the interview. Table 10.26.1 shows the distribution of stresses related during the interview.

TABLE 10.26.1. RIDER STRESS ON DAY OF INTERVIEW

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|--------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| None Observed | 0. | 2233 | 96.7 | 96.7 | 96.7 |
| Conflict Family, Friends | 1. | 14 | 0.6 | 0.6 | 97.3 |
| Work Conflict | 2. | 11 | 0.5 | 0.5 | 97.7 |
| Death-Illness of Friend | 3. | 1 | 0.0 | 0.0 | 97.8 |
| Financial Distress | 4. | 14 | 0.6 | 0.6 | 98.4 |
| School Problem | 5. | 19 | 0.8 | 0.8 | 99.2 |
| Legal-Police Problem | 6. | 5 | 0.2 | 0.2 | 99.4 |
| Social Agency Problem | 7. | 1 | 0.0 | 0.0 | 99.5 |
| Reward Stress | a. | 12 | 0.5 | 0.5 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.27 Motorcycle Rider Stated Front Brake Use

Riders interviewed in the exposure data were questioned regarding their average use of the front brake in stopping situations. Over five-eighths reported using the front brake "always"; 82.5% reported front brake "usually" or "always." The data are shown in Table 10.27.1.

TABLE 10.27.1. MOTORCYCLE RIDER STATED FRONT BRAKE USE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Never | 0. | 13 | 0.6 | 2.2 | 2.2 |
| Sometimes | 1. | 92 | 4.0 | 15.3 | 17.5 |
| Usually | 2. | 116 | 5.0 | 19.3 | 36.8 |
| Always | 3. | 379 | 16.4 | 63.2 | 100.0 |
| Not Observed | 8. | 1699 | 73.5 | MISSING | 100.0 |
| W.A.-No Front Brake | 9. | 11 | 0.5 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.28 Motorcycle Passenger Involvement

Passenger involvement **was** determined from photos if the rider did not **stop** for an interview. In **some** instances, such as nighttime freeway exposures, poor visibility precluded accurate determination or usable photos. Passengers were present on 18.3% of the motorcycles passing exposure sites. This is shown in Table 10.28.1.

TABLE 10.28.1. NUMBER OF PASSENGERS

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|--------------------------|
| None | 0. | 1835 | 79.4 | 81.6 | 81.6 |
| One | 1. | 409 | 17.7 | 18.2 | 99.8 |
| two | 2. | 3 | 0.1 | 0.1 | 100.0 |
| Three | 3. | 1 | 0.0 | 0.0 | 100.0 |
| Unknown | 8. | 62 | 2.7 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

10.29 Motorcycle Rider and Passenger Protective Equipment

The exposure data shows a general trend to less adequate coverage for passengers than riders. Helmet and eye protection use was lower among passengers and the weight of riding apparel was generally less. Rider apparel generally tends toward heavy-weight clothing while passenger apparel tends toward **medium-weight**. Given the almost daily riding habits of most of the riders interviewed, it would appear that riders dress **more** heavily in expectation of riding, while passengers are less dressed for a motorcycle ride. Perhaps this feature portrays the passengers motorcycle ride **as** an unexpected event.

High Visibility Upper Torso Coverage

Upper torso coverage offering high contrast conspicuity was evaluated for all riders passing exposure data collection sites. While the great majority of **riders** wore moderate-to-low conspicuity upper torso coverage, 5.1% wore highly conspicuous attire such as bright yellow, orange, day-glo and reflective upper torso garments. Table 10.29.1 shows this data.

Helmet Use

Riders passing exposure sites were helmeted slightly more than half the time, as shown in Table 10.29.2. The distribution of helmet coverage types is shown in Table 10.29.3. Full coverage predominates, followed closely by full facial coverage helmets. The majority of partial coverage helmets were worn by law enforcement and escort service motorcycle riders. Passenger helmet usage was lower than that for riders: 68.3% were unhelmeted.

TABLE 10.29.1. HIGH VISIBILITY UPPER TORSO GARMENT WORN?

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Yes | 1. | 112 | 4.8 | 5.1 | 5.1 |
| No | 2. | 2072 | 09.7 | 94.9 | 100.0 |
| Unknown | 8. | 126 | 5.5 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.29.2. RIDER HELMET USE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| No | 0. | 1037 | 44.9 | 47.8 | 47.8 |
| Yes | 1. | 1131 | 49.0 | 52.2 | 100.0 |
| Unknown | 8. | 142 | 6.1 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Helmet Color

The distribution of rider and passenger helmet color is shown in Table 10.29.4. **White** is the most frequent color, accounting for approximately three-eighths of the helmets.

Eye Protection

Some form of protection "as **worn** over the eyes by 70.2% of the riders. However, the type of eye protection **worn** was about equally divided between glasses (and sunglasses) and **more** adequate coverage such as face shields and goggles. Passengers showed a much lower level of eye protection, (38.6%) usually in the form of glasses.

Among those riders required to wear glasses or contacts for vision **correction** (35.1% of those interviewed) nearly one-third were not wearing the required vision correction. Contact lenses were **worn** very little.

The data relating eye protection are shown in Table 10.29.5.

The data on rider eye correction worn are shown in Table 10.29.6.

TABLE 10.29.3. HELMET TYPE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|------------------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None Worn | 0. | 996 | 43.1 | 45.9 | 45.9 |
| Partial | 1. | 137 | 5.9 | 6.3 | 52.3 |
| Full | 2. | 517 | 22.4 | 23.8 | 76.1 |
| Full Facial-105 | 3. | 20 | 0.9 | 0.9 | 77.0 |
| Full Facial-120 | 4. | 457 | 19.8 | 21.1 | 98.1 |
| Not Worn-On Motorcycle | 6. | 41 | 1.8 | 1.9 | 100.0 |
| Unknown | 8. | 142 | 6.1 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None Worn | 0. | 277 | 12.0 | 57.6 | 57.6 |
| Partial | 1. | 6 | 0.3 | 1.2 | 58.8 |
| Full | 2. | 99 | 4.3 | 20.6 | 79.4 |
| Full Facial-105 | 3. | 2 | 0.1 | 0.0 | 79.4 |
| Full Facial-120 | 4. | 23 | 1.0 | 4.8 | 84.2 |
| Not Worn-On Motorcycle | 6. | 3 | 0.1 | 0.1 | 84.3 |
| Unknown | 8. | 71 | 3.1 | 16.0 | 100.0 |
| N.A. | 9. | 1829 | 79.2 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.29.4. HELMET COLOR

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-----------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| White | 1. | 433 | 18.7 | 38.6 | 38.6 |
| Yellow | 2. | 45 | 1.9 | 4.0 | 42.6 |
| Orange | 3. | 95 | 4.1 | 8.5 | 51.1 |
| Black | 4. | 172 | 7.4 | 15.3 | 66.4 |
| Brown | 5. | 10 | 0.4 | 0.9 | 67.3 |
| Blue | 6. | 90 | 3.9 | 8.0 | 75.3 |
| Red | 7. | 112 | 4.8 | 10.0 | 85.3 |
| Purple | 8. | 3 | 0.1 | 0.3 | 85.6 |
| Green | 9. | 18 | 0.8 | 1.6 | 87.2 |
| Silver-Gray | 10. | 87 | 3.8 | 7.8 | 94.9 |
| Gold | 11. | 53 | 2.3 | 4.7 | 99.6 |
| Others | 97. | 4 | 0.2 | 0.4 | 100.0 |
| Unknown | 98. | 190 | 8.2 | MISSING | 100.0 |
| N.A. | 99. | 998 | 43.2 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| White | 1. | 43 | 1.9 | 34.4 | 34.4 |
| Yellow | 2. | 6 | 0.3 | 4.8 | 39.2 |
| orange | 3. | 12 | 0.5 | 9.6 | 48.8 |
| Black | 4. | 6 | 0.3 | 4.8 | 53.6 |
| Brown | 5. | 3 | 0.1 | 2.4 | 56.0 |
| Blue | 6. | 14 | 0.6 | 11.2 | 67.2 |
| Red | 7. | 21 | 0.9 | 16.8 | 84.0 |
| Green | 9. | 6 | 0.3 | 4.8 | 88.8 |
| Silver-Gray | 10. | 13 | 0.6 | 10.4 | 99.2 |
| Gold | 11. | 1 | 0.0 | 0.8 | 100.0 |
| unknown | 98. | 84 | 3.6 | MISSING | 100.0 |
| N.A. | 99. | 2101 | 91.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.29.5. EYE PROTECTION

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|---------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None | 0. | 564 | 24.4 | 29.8 | 29.8 |
| Glasses-Sun Glasses | 1. | 665 | 28.8 | 35.2 | 65.0 |
| Shields | 2. | 596 | 25.8 | 31.5 | 96.5 |
| Goggles | 3. | 65 | 2.8 | 3.4 | 100.0 |
| Unknown | 8. | 420 | 18.2 | MISSING | MISSING |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None | 0. | 222 | 9.6 | 63.2 | 63.2 |
| Glasses-Sun Glasses | 1. | 69 | 3.0 | 19.7 | 82.9 |
| Shields | 2. | 55 | 2.4 | 15.7 | 98.6 |
| Goggles | 3. | 5 | 0.2 | 1.4 | 100.0 |
| Unknown | 8. | 133 | 5.8 | MISSING | 100.0 |
| N.A. | 9. | 1826 | 79.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.29.6. RIDER EYE CORRECTION WORN AT TIME OF INTERVIEW

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Required-Not Worn | 0. | 71 | 3.1 | 11.2 | 11.2 |
| Glasses | 1. | 142 | 6.1 | 22.5 | 33.7 |
| Contacts | 2. | 9 | 0.4 | 1.4 | 35.1 |
| Not Observed | 8. | 1678 | 72.6 | MISSING | MISSING |
| N.A.-Eye Corr. Not Required | 9. | 410 | 17.7 | 64.9 | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Upper Torso Coverage

Upper torso coverage for the motorcycle riders passing exposure sites generally offered a moderate-to-high level of protection: Nearly **half** wore **heavy** cloth such as a heavy jacket or leathers. Only **1.6%** wore nothing. Passengers showed a general trend to use less substantial coverage than riders; they wore leather jackets only **half** as often. Data for rider and passenger upper torso coverage are **shown** in Table 10.29.7.

TABLE 10.29.7. UPPER TORSO GARMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|------------------|------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None | 0. | 33 | 1.4 | 1.6 | 1.6 |
| Light Cloth | 1. | 493 | 21.3 | 23.7 | 25.3 |
| Medium Cloth | 2. | 577 | 25.0 | 27.8 | 53.1 |
| Heavy Cloth | 3. | 681 | 29.5 | 32.8 | 85.9 |
| Leather | 4. | 293 | 12.7 | 14.1 | 100.0 |
| Unknown | 8. | 233 | 10.1 | MISSING | 100.0 |
| TOTAL | | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None | 0. | 8 | 0.3 | 2.0 | 2.0 |
| Light Cloth | 1. | 128 | 5.5 | 31.8 | 33.8 |
| Medium Cloth | 2. | 123 | 5.3 | 30.6 | 64.4 |
| Heavy Cloth | 3. | 115 | 5.0 | 28.6 | 93.0 |
| Leather | 4. | 28 | 1.2 | 7.0 | 100.0 |
| Unknown | a. | a2 | 3.5 | MISSING | 100.0 |
| N.A. | 9. | 1826 | 79.0 | MISSING | 100.0 |
| TOTAL | | 2310 | 100.0 | 100.0 | |

Lower Torso Coverage

Rider and passenger lower torso coverage **was** predominantly medium and heavy cloth. This **was** usually a pair of **levi's** or equivalent denim. "None" as the amount of lower torso coverage **was** not limited to nudity (which was in fact observed at exposure sites); it also included bathing suits, shorts, etc. As with helmets and upper torso coverage, there is the general tendency of passengers to be somewhat less heavily dressed than riders.

The data relating lower torso coverage is shown in Table 10.29.8.

TABLE 10.29.8. LOWER TORSO GARMENT

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None | 0. | 20 | 0.9 | 1.0 | 1.0 |
| Light Cloth | 1. | 62 | 2.7 | 3.1 | 4.1 |
| Medium Cloth | 2. | 1014 | 43.9 | 50.2 | 54.3 |
| Heavy Cloth | 3. | 914 | 39.6 | 45.2 | 99.5 |
| Leather | 4. | 10 | 0.4 | 0.5 | 100.0 |
| Unknown | 8. | 290 | 12.6 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None | 0. | 11 | 0.5 | 2.8 | 2.8 |
| Light Cloth | 1. | 23 | 1.0 | 5.8 | 8.5 |
| Medium Cloth | 2. | 199 | 8.6 | 49.9 | 58.4 |
| Heavy Cloth | 3. | 166 | 7.2 | 41.6 | 100.0 |
| Unknown | 8. | 86 | 3.7 | MISSING | 100.0 |
| N.A. | 9. | 1825 | 79.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Hand Protection

Some **type** of glove was **worn** by nearly half the riders, but by **only** one passenger in six. These data are shown in Table 10.29.9 for riders and passengers.

Foot Coverage

Foot coverage among motorcycle riders was generally medium-weight to heavy-weight shoes. Nearly half wore heavy shoes or boots, while only 0.5% wore nothing on their feet. Passenger foot coverage was most often medium-weight **shoes**. **The** data for riders and passengers are shown in Table 10.29.10.

Safety Helmet Use Characteristics

Helmets were worn by 52.2% of the riders passing exposure sites, as shown in 10.29.2. The use or non-use of a helmet was crosstabulated with the principal factors of temperature, weather, rider education and occupation, sex, trip plan, trip length, and motorcycling experience. Helmet use tends to increase with age, education and trip length; it is higher **among** the white collar and service occupations. Helmet use tends to decrease as weather gets warmer. Helmet use appears to be unrelated to sex or to number of days per week riding.

TABLE 10.29.9. GLOVES

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|----------------|--------------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None | 0. | 960 | 41.6 | 50.2 | 50.2 |
| Light | 1. | 121 | 5.2 | 6.3 | 56.6 |
| Medium | 2. | 474 | 20.5 | 24.8 | 81.4 |
| Heavy | 3. | 356 | 15.4 | 18.6 | 100.0 |
| Not Observed | 8. | 399 | 17.3 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None | 0. | 265 | 11.5 | 82.8 | 82.8 |
| Light | 1. | 15 | 0.6 | 4.7 | 87.5 |
| Medium | 2. | 33 | 1.4 | 10.3 | 97.8 |
| Heavy | 3. | 7 | 0.3 | 2.2 | 100.0 |
| Not Observed | 8. | 165 | 7.1 | MISSING | 100.0 |
| N.A. | 9. | 1825 | 79.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

Safety Helmet Use and Weather Conditions

Helmet use is equally divided when weather conditions are clear, but increases considerably when the weather turns cloudy. The data are shown in Table 10.29.11.

Safety Helmet Use and Temperature

Helmet use varies inversely with temperature: As temperatures drop helmet use goes up. and when temperatures rise, especially over **90°F**, helmet use declines. As such, it appears that although helmets are designed as crash protection, many of the occasional wearers of helmets use them simply as a means of weather protection. During the first **summer** of data collection it appeared that helmet use dropped noticeably when the first heat wave pushed temperatures **over 85°F**. Indeed, the data seems to bear out this informal observation; helmet use is stable at about 50% in the **60°-80°F** range and drops markedly above that range. These data on helmet use by temperature are shown in Table 10.29.12.

Safety Helmet Use by Age

Safety helmet use and age were determined for 616 riders in the exposure data. Of these, 46.1% were helmeted. The data for rider age and helmet use were **cross-**tabulated in Table 10.29.13. Helmet use increased from less than 20% in the under-17 age group to approximately 40% in riders 17-26, 50.8% for those 27-39 years old, and approximately 60% among those 40 and over.

TABLE 10.29.10. FOOT COVERAGE

| Category Label | Code | Absolute Frequency | Relative Frequency (%) | Adjusted Frequency (%) | Cumulative Frequency (%) |
|-----------------------|-------|--------------------|------------------------|------------------------|--------------------------|
| Rider | | | | | |
| None | 0. | 9 | 0.4 | 0.5 | 0.5 |
| Sandals, Tennis Shoes | 1. | 306 | 13.2 | 16.0 | 16.5 |
| Medium Street Shoes | 2. | 703 | 30.4 | 36.7 | 53.2 |
| Heavy Shoe, Boot | 3. | 895 | 89.7 | 46.8 | 100.0 |
| Not Observed | 8. | 397 | 17.2 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |
| Passenger | | | | | |
| None | 0. | 10 | 0.4 | 2.7 | 2.7 |
| Sandals, Tennis Shoes | 1. | 101 | 4.4 | 27.2 | 29.8 |
| Medium Street Shoes | 2. | 153 | 6.6 | 41.1 | 71.0 |
| Heavy Shoe, Boot | 3. | 108 | 4.7 | 29.0 | 100.0 |
| Not Observed | 8. | 113 | 4.9 | MISSING | 100.0 |
| N.A. | 9. | 1825 | 79.0 | MISSING | 100.0 |
| | TOTAL | 2310 | 100.0 | 100.0 | |

TABLE 10.29.11. SAFETY HELMET USE AND WEATHER CONDITIONS

| Weather | Count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|----------------------------|--|------------|------|-------|
| | | No | Yes | |
| Clear | 902 | 902 | 1804 | 84.5 |
| | 50.0 | 50.0 | | |
| | 88.4 | 81.1 | | |
| | 42.3 | 42.3 | | |
| Rain | 1 | 0 | 1 | 0.0 |
| | 100.0 | 0.0 | | |
| | 0.1 | 0.0 | | |
| | 0.0 | 0.0 | | |
| Drizzle | 0 | 2 | 2 | 0.1 |
| | 0.0 | 100.0 | | |
| | 0.0 | 0.2 | | |
| | 0.0 | 0.1 | | |
| Cloudy or Partly Cloudy | 119 | 207 | 326 | 15.3 |
| | 36.5 | 63.5 | | |
| | 11.6 | 18.6 | | |
| | 5.6 | 9.7 | | |
| Column Total | 1022 | 1112 | 2134 | 100.0 |
| | 47.9 | 52.1 | | |

TABLE 10.29.12. SAFETY HELMET USE BY
 AMBIENT TEMPERATURE

| Temperature, °F | Count Row Pct Col Pct Tot Pct | Helmet use | | Total |
|--------------------|--|--------------|--------------|---------------|
| | | No | Yes | |
| 31-40 | | 1 | 3 | 4 |
| | | 25.0 | 75.0 | 0.2 |
| | | 0.1 | 0.3 | |
| | | 0.0 | 0.1 | |
| 41-50 | | 26 | 66 | 92 |
| | | 28.3 | 71.7 | 4.2 |
| | | 2.5 | 5.8 | |
| | | 1.2 | 3.0 | |
| 51-60 | | 115 | 226 | 341 |
| | | 33.7 | 66.3 | 15.7 |
| | | 11.1 | 20.0 | |
| | | 5.3 | 10.4 | |
| 61-70 | | 420 | 417 | 837 |
| | | 50.2 | 49.8 | 38.6 |
| | | 40.5 | 36.9 | |
| | | 19.4 | 19.2 | |
| 71-80 | | 294 | 291 | 585 |
| | | 50.3 | 49.7 | 27.0 |
| | | 20.4 | 25.7 | |
| | | 13.6 | 13.4 | |
| 81-90 | | 150 | 113 | 263 |
| | | 57.0 | 43.0 | 12.1 |
| | | 14.5 | 10.0 | |
| | | 6.9 | 5.2 | |
| 91-100 | | 31 | 15 | 46 |
| | | 67.4 | 32.6 | 2.1 |
| | | 3.0 | 1.3 | |
| | | 1.4 | 0.7 | |
| | Column Total | 1037 47.8 | 1131 52.2 | 2168 100.0 |

TABLE 10.29.13. **SAFETY** HELMET USE BY
RIDER AGE

| Age | Count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|------------|--|------------|------|-------|
| | | No | Yes | |
| 0-16 years | 13 | 3 | 16 | |
| | 81.2 | 18.1 | 2.6 | |
| | 3.9 | 1.1 | | |
| | 2.1 | 0.5 | | |
| 17-20 | 60 | 37 | 97 | |
| | 61.9 | 38.1 | 15.7 | |
| | 18.1 | 13.0 | | |
| | 9.7 | 6.0 | | |
| 21-26 | 107 | 73 | 180 | |
| | 59.4 | 40.6 | 29.2 | |
| | 32.2 | 25.7 | | |
| | 17.4 | 11.9 | | |
| 27-39 | 123 | 127 | 250 | |
| | 49.2 | 50.8 | 40.6 | |
| | 37.0 | 44.7 | | |
| | 20.0 | 20.6 | | |
| 40-49 | 20 | 31 | 51 | |
| | 39.2 | 60.8 | 8.3 | |
| | 6.0 | 10.9 | | |
| | 3.2 | 5.0 | | |
| 50-59 | 6 | 8 | 14 | |
| | 42.9 | 57.1 | 2.3 | |
| | 1.8 | 2.8 | | |
| | 1.0 | 1.3 | | |
| 60-97 | 5 | 8 | 13 | |
| | 37.35 | 62.5 | 1.3 | |
| | 1.0 | 1.8 | | |
| | 0.5 | 0.8 | | |
| | Column | 332 | 284 | 616 |
| | Total | 53.9 | 46.1 | 100.0 |

Safety Helmet Use by Sex

Helmets **were worn** by slightly more than half the male riders - 51.9%. Helmet use by females was slightly lower than that of males - 46.9%. The data are shown in Table 10.29.14.

TABLE 10.29.14. SAFETY HELMET USE BY SEX

| Rider Sex | count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|---------------------|--|------------|-------------|-------|
| | | No | | |
| Male | 946 | 1022 | 1968 | |
| | 48.1 | 51.9 | 98.4 | |
| | 98.1 | 98.6 | | |
| | 47.3 | 51.1 | | |
| Female | 17 | 15 | 32 | |
| | 53.1 | 46.9 | 1.6 | |
| | 1.8 | 1.4 | | |
| | 0.8 | 0.7 | | |
| Unknown | 1 | 0 | 1 | |
| | 100.0 | 0.0 | 0.0 | |
| | 0.1 | 0.0 | | |
| | 0.0 | 0.0 | | |
| Column Total | 964 | 1037 | 2001 | |
| | 48.2 | 51.8 | 100.0 | |

Safety Helmet Use by Education

Helmet use tends to increase with increasing levels of formal education. Overall safety helmet use in the exposure data was 51.8%. Riders with a partial college education show approximately this level of use: 55.4% of them were helmeted when observed. Riders who had completed at least a bachelor's degree **wore** helmets 64.2% of the time, while those with only a partial high school education showed the lowest level of use, wearing a helmet in only 23.9% of the cases. This is shown in Table 10.29.15.

Safety Helmet Use by Occupation

Helmet use among various types of occupations shows a correspondence with education - occupations requiring a higher level of formal education tend to show a higher rate of helmet use: Riders from professional and administrative occupations (21.3% of those interviewed) showed 65% helmet use. Craftsmen, truckers, and laborers showed a 38.5% rate of helmet use. Service workers showed a very high level of helmet use (88%) in part because motorcycle police, who are required to wear a helmet, were a large portion of the service worker population. The data are **shown** in Table 10.29.16.

TABLE 10.29.15. SAFETY HELMET USE BY EDUCATION

| Education | Count | Helmet Use | | Total |
|-----------------------------|-------------------------------|------------|-------|-------|
| | Row Pct Col Pct Tot Pct | NO | Yes | |
| Graduate School | 11 | 16 | 27 | |
| Professional | 40.7 | 59.3 | 4.4 | |
| | 3.4 | 5.6 | | |
| | 1.8 | 2.6 | | |
| College Graduate | 29 | 54 | 83 | |
| | 34.9 | 65.1 | 13.6 | |
| | 8.9 | 18.9 | | |
| | 4.7 | 8.8 | | |
| Partial College | 103 | 129 | 232 | |
| | 44.4 | 55.6 | 37.9 | |
| | 31.5 | 45.3 | | |
| | 16.8 | 21.1 | | |
| High School Graduate | 105 | 55 | 160 | |
| | 65.6 | 34.4 | 26.1 | |
| | 32.1 | 19.3 | | |
| | 17.2 | 9.0 | | |
| Partial High School | 70 | 22 | 92 | |
| | 76.1 | 23.9 | 15.0 | |
| | 21.4 | 7.7 | | |
| | 11.4 | 3.6 | | |
| Junior High, Grammar School | 7 | 7 | 14 | |
| | 50.0 | 50.0 | 2.3 | |
| | 2.1 | 2.5 | | |
| | 1.1 | 1.1 | | |
| Less than 7 Years | 2 | 2 | 4 | |
| | 50.0 | 50.0 | 0.7 | |
| | 0.6 | 0.7 | | |
| | 0.3 | 0.3 | | |
| Column Total | 327 | 285 | 612 | |
| | 53.4 | 46.6 | 100.0 | |

TABLE 10.29.16. SAFETY HELMET USE BY OCCUPATION

| Occupation | Count Row Pct Col Pct Tot Pct | Helmet Use | | Total | Occupation | Count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|---------------------|--|---------------------------|-------------|------------------|---------------------------|--|--------------|-----|-------|
| | | No | Yes | | | | NO | Yes | |
| Professional | 43 42.2 13.1 6.4 | 59 57.8 17.3 8.8 | 102 15.2 | Farm Laborers | 1 100.0 0.3 0.1 | 0 0.0 0.0 0.0 | 1 0.1 | | |
| Administrator | 7 17.1 2.1 1.0 | 34 32.9 10.0 5.1 | 41 6.1 | Service Workers | 10 12.0 3.0 1.5 | 73 38.0 21.4 10.9 | 83 12.4 | | |
| Sales Worker | 20 51.3 6.1 3.0 | 19 48.7 5.6 2.8 | 39 5.8 | Household Worker | 1 100.0 0.3 0.1 | 0 0.0 0.0 0.0 | 1 0.1 | | |
| Clerical | 18 40.9 5.5 2.7 | 26 59.1 7.6 3.9 | 44 6.6 | Students | 57 64.0 17.3 8.5 | 32 36.0 9.4 4.8 | 89 13.3 | | |
| Craftsmen | 83 58.9 25.2 12.4 | 58 41.1 17.0 8.7 | 141 21.0 | Military | 2 66.7 0.6 0.3 | 1 33.3 0.3 0.1 | 3 0.4 | | |
| Operatives | 11 73.3 3.3 1.6 | 4 26.7 1.2 0.6 | 15 2.2 | Retired | 3 42.9 0.9 0.4 | 4 57.1 1.2 0.6 | 7 1.0 | | |
| Transport Operators | 12 63.2 3.6 1.8 | 7 36.8 2.1 1.0 | 19 2.8 | Unemployed | 17 89.5 5.2 2.5 | 2 10.5 0.6 0.3 | 19 2.8 | | |
| Laborers | 44 66.1 13.4 6.6 | 22 33.3 6.5 3.3 | 66 9.9 | | | | | | |
| | | | | Column Total | 329 49.1 | 341 50.9 | 670 100.0 | | |

Safety Helmet Use by Riding Experience

Safety helmet use tends to increase among riders with more street riding experience. A number of factors may be involved in which **unhelmeted** riders are unequally eliminated from the riding population, or riders who continue riding beyond a year or **so may** simply become more cautious and increase their helmet use. Safety helmet use appears to be quite low among beginning riders (33.7%) and to level off near 50% **for riders** with three or more years riding experience. Those data for motorcycle riders for whom helmet use and riding experience were both known are shown in Table 10.29.17.

TABLE 10.29.17. RIDER STREET RIDING EXPERIENCE AND HELMET USE

| Experience | count | | Helmet Use | | Total |
|-------------------|---------------------|---------|-------------|-------|-------|
| | Row Pct | Col Pct | No | Yes | |
| 0-6 Months | | | 55 | 28 | 83 |
| | | | 66.3 | 33.7 | 13.8 |
| | | | 17.0 | 10.0 | |
| | | | 9.1 | 4.6 | |
| 7-12 Months | | | 36 | 28 | 64 |
| | | | 56.3 | 43.7 | 10.6 |
| | | | 11.1 | 10.0 | |
| | | | 6.0 | 4.6 | |
| 1-2 Years | | | 42 | 37 | 85 |
| | | | 56.5 | 43.5 | 14.1 |
| | | | 14.8 | 13.3 | |
| | | | 8.0 | 6.1 | |
| 2-3 Years | | | 26 | 19 | 45 |
| | | | 57.8 | 42.2 | 7.5 |
| | | | 8.0 | 16.8 | |
| | | | 4.3 | 3.2 | |
| 3-4 Years | | | 22 | 26 | 48 |
| | | | 45.8 | 54.2 | 8.0 |
| | | | 6.8 | 9.3 | |
| | | | 3.6 | 4.3 | |
| 4-5 Years | | | 24 | 22 | 46 |
| | | | 52.2 | 47.8 | 7.6 |
| | | | 7.4 | 7.9 | |
| | | | 4.0 | 3.6 | |
| More than 5 Years | | | 113 | 119 | 232 |
| | | | 48.7 | 51.3 | 38.5 |
| | | | 34.9 | 42.7 | |
| | | | 18.7 | 19.7 | |
| | Column Total | 324 | 279 | 603 | |
| | | 53.7 | 46.3 | 100.0 | |

Helmet use does not **show** a similar consistent pattern over time when compared with experience on the observed motorcycle. Of 603 riders for whom experience **and** helmet use were known, helmet **use** appears to be highest (53%:) with one **to four** years experience on the observed motorcycle, but to be **lower** (45%) before and after that. However, motorcycles over two years old made up only 18.9% of the observations here; consequently, raw numbers in the cells of Table **10.29.18** are small enough to limit the significance of these data,

TABLE 10.29.18. EXPERIENCE ON OBSERVED MOTORCYCLE AND HELMET USE

| Experience | count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|-------------------|--|------------|-------|-------|
| | | No | Yes | |
| 0-6 Months | 141 | 104 | 245 | |
| | 57.6 | 42.4 | 40.6 | |
| | 43.1 | 37.8 | | |
| | 23.4 | 17.2 | | |
| 7-12 Months | 81 | 59 | 140 | |
| | 57.9 | 42.1 | 23.2 | |
| | 24.8 | 21.4 | | |
| | 13.4. | 9.8 | | |
| 1-2 Years | 49 | 55 | 104 | |
| | 47.1 | 52.9 | 17.2 | |
| | 15.0 | 19.9 | | |
| | 8.1 | 9.1 | | |
| 2-3 Years | 17 | 19 | 36 | |
| | 47.2 | 52.8 | 6.0 | |
| | 5.2 | 6.9 | | |
| | 2.8 | 3.2 | | |
| 3-4 Years | 11 | 14 | 25 | |
| | 44.0 | 56.0 | 4.1 | |
| | 3.4 | 5.1 | | |
| | 1.8 | 2.3 | | |
| G-5 Years | 12 | 10 | 22 | |
| | 54.5 | 45.5 | 3.6 | |
| | 3.7 | 3.6 | | |
| | 2.0 | 1.7 | | |
| More than 5 Years | 16 | 15 | 31 | |
| | 51.6 | 48.4 | 5.1 | |
| | 4.9 | 5.4 | | |
| | 2.7 | 2.5 | | |
| Column Total | 327 | 276 | 603 | |
| | 54.2 | 45.8 | 100.0 | |

Safety Helmet Use By Trip Plan

Safety helmet use varies with the trip plan and the patterns of use are complex. Basically, helmets tend to be used **more** when work is the origin or destination. Indeed, use is extremely high - 91.3% - when work **is** both origin and destination, as when a motorcycle is ridden in performance of a job - for example, messengers, police and funeral escort riders. On the other hand, helmet use is low when riding is for recreational purposes or for shopping and errands. For example, of 30 riders for whom "recreation" was both origin and destination, only 5 (16.7%) were helmeted. The low incidence of helmet use in recreational riding may well be related to weather and temperature. Recreational riding is **more common** in "warm or hot weather when helmet use is lower.

"Home" as an origin or destination is indifferently related to helmet use. That is, home is **the** origin for roughly 40% of both the helmeted and unhelmeted riders, and the destination for about 28% of both groups.

Finally, a rider going to school is somewhat more likely to be helmeted, but will probably be bare-headed on the way home. This may be related to **warm**er temperatures during the trip home (presumably in the afternoon) which is also the same time of day that the probability of accident involvement is higher. The cross-tabulation of trip origin and destination for unhelmeted riders is shown in Table 10.29.19. The same data for helmeted riders are shown in Table 10.29.20,

Safety Helmet Use By Trip Length

Helmet use increases with increasing trip length, as shown in Table 10.29.21. Use "as the lowest (28%) on trips of less than one mile, and increased steadily to 56.7% for trips longer than 50 miles.

Safety Helmet Use and Frequency of Riding

Safety helmet use and the number of days per week riding were identified for 647 riders. These data are cross-tabulated in Table 10.29.22. A large portion of the five- and six-day-a-week riders are helmeted: This can be attributed in part to motorcycle riders whose use of a motorcycle is **work-**related.

10.30 Sample Population Data From Motor Vehicle and Driver License Registry

Additional information "as gathered from the California Department of Motor Vehicles to determine some characteristics of the driving population in the study area. For example, no exposure data were gathered to compare drivers of the other vehicle involved in the motorcycle accident with the larger population.

The ratio of motorcycle to automobile registrations in Los Angeles County is shown in Table 10.30.1 for the years of 1976 - 1979.

TABLE 10.29.19. TRIP PLAN FOR UNHELMETED RIDERS

| Origin | Count Row Pct Col Pct Tot Pct | Destination | | | | | | | | Row Total |
|-----------------------|--|-------------|------|--------------------|------------|---------------------|--------------------------|--------|---------------------|--------------|
| | | Home | Work | Shopping Errand | Recreation | Friends Relative | Bar Drinking Party | School | Unknown- Not Obs | |
| Home | 3 | 32 | 24 | 55 | 19 | 0 | 12 | 0 | 1 | 146 |
| | 2.1 | 1.9 | 16.4 | 37.7 | 13.0 | 0.0 | 8.2 | 0.0 | 0.7 | 14.1 |
| | 3.1 | 1.1 | 54.5 | 60.4 | 63.3 | 0.0 | 70.6 | 0.0 | 10.0 | |
| | 0.3 | 3.1 | 2.3 | 5.3 | 1.8 | 0.0 | 1.2 | 0.0 | 0.1 | |
| | 28 | 6 | 9 | 6 | 2 | 0 | 0 | 0 | 0 | 51 |
| | 54.9 | 1.8 | 17.6 | 11.8 | 3.9 | 0.0 | 0.0 | 0.0 | 0.0 | 4.9 |
| Shopping Errand | 28.6 | 3.3 | 20.5 | 6.6 | 6.7 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 2.7 | 0.6 | 0.9 | 0.6 | 0.2 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 19 | 4 | 4 | 1 | 3 | 0 | 0 | 0 | 0 | 31 |
| | 61.3 | 2.9 | 12.9 | 3.2 | 9.7 | 0.0 | 0.0 | 0.0 | 0.0 | 3.0 |
| Recreation | 19.4 | 8.9 | 9.1 | 1.1 | 10.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 1.8 | 0.4 | 0.4 | 0.1 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 18 | 0 | 0 | 25 | 0 | 0 | 0 | 2 | 0 | 45 |
| Friends Relative | 40.0 | 0.0 | 0.0 | 55.6 | 0.0 | 0.0 | 0.0 | 4.4 | 0.0 | 4.3 |
| | 18.4 | 0.0 | 0.0 | 27.5 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | |
| | 1.7 | 0.0 | 0.0 | 2.4 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | |
| | 16 | 1 | 7 | 3 | 4 | 0 | 2 | 0 | 0 | 33 |
| Bar Drinking Party | 48.5 | 3.0 | 21.2 | 9.1 | 12.1 | 0.0 | 6.1 | 0.0 | 0.0 | 3.2 |
| | 16.3 | 2.2 | 15.9 | 3.3 | 13.3 | 0.0 | 11.8 | 0.0 | 0.0 | |
| | 1.5 | 0.1 | 0.7 | 0.3 | 0.4 | 0.0 | 0.2 | 0.0 | 0.0 | |
| | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 |
| School | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.0 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | |
| | 13 | 2 | 0 | 0 | 2 | 0 | 2 | 0 | 0 | 19 |
| Unknown- Not Obs | 68.4 | 0.5 | 0.0 | 0.0 | 10.5 | 0.0 | 10.5 | 0.0 | 0.0 | 1.8 |
| | 13.3 | 4.4 | 0.0 | 0.0 | 6.7 | 0.0 | 11.8 | 0.0 | 0.0 | |
| | 1.3 | 0.2 | 0.0 | 0.0 | 0.2 | 0.0 | 0.2 | 0.0 | 0.0 | |
| | 1 | 0 | 0 | 1 | 0 | 0 | 1 | 706 | 0 | 709 |
| N.A. | 0.1 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.1 | 99.6 | 0.0 | 68.4 |
| | 1.0 | 0.0 | 0.0 | 1.1 | 0.0 | 0.0 | 5.9 | 99.4 | 0.0 | |
| | 0.1 | 0.0 | 0.0 | 0.1 | 0.0 | 0.0 | 0.1 | 68.1 | 0.0 | |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 0 | 2 |
| Column Total | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 100.0 | 0.0 | 0.2 |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.3 | 0.0 | |
| | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.2 | 0.0 | |
| | 98 | 45 | 44 | 91 | 30 | 1 | 17 | 710 | 1 | 1037 |
| | 9.5 | 4.3 | 4.2 | 8.8 | 2.9 | 0.1 | 1.6 | 68.5 | 0.1 | 100.0 |

TABLE 10.29.20. TRIP PLAN FOR HELMETED RIDERS

| Origin | Count Row Pct Col Pct Tot Pct | Destination | | | | | | Row Total |
|-----------------------|--|-------------|------|--------------------|------------|---------------------|--------|--------------|
| | | Home | Work | Shopping Errand | Recreation | Friends Relative | School | |
| Home | 2 | 37 | 15 | 41 | 19 | 16 | 0 | 130 |
| | 1.5 | 28.5 | 11.5 | 31.5 | 14.6 | 12.3 | 0.0 | 11.5 |
| | 2.3 | 33.6 | 57.7 | 71.9 | 65.5 | 88.9 | 0.0 | |
| | 0.2 | 3.3 | 1.3 | 3.6 | 1.7 | 1.4 | 0.0 | |
| Work | 51 | 63 | 7 | 8 | 2 | 2 | 0 | 133 |
| | 38.3 | 47.4 | 5.3 | 6.0 | 1.5 | 1.5 | 0.0 | 11.8 |
| | 59.3 | 57.3 | 26.9 | 14.0 | 6.9 | 11.1 | 0.0 | |
| | 4.5 | 5.6 | 0.6 | 0.7 | 0.2 | 0.2 | 0.0 | |
| Shopping Errand | 12 | 5 | 2 | 0 | 1 | 0 | 0 | 20 |
| | 60.0 | 25.0 | 10.0 | 0.0 | 5.0 | 0.0 | 0.0 | 1.8 |
| | 14.0 | 4.5 | 7.7 | 0.0 | 3.4 | 0.0 | 0.0 | |
| | 1.1 | 0.4 | 0.2 | 0.0 | 0.1 | 0.0 | 0.0 | |
| Recreation | 11 | 0 | 0 | 5 | 4 | 0 | 0 | 20 |
| | 55.0 | 0.0 | 0.0 | 25.0 | 20.0 | 0.0 | 0.0 | 1.8 |
| | 12.8 | 0.0 | 0.0 | 8.8 | 13.8 | 0.0 | 0.0 | |
| | 1.0 | 0.0 | 0.0 | 0.4 | 0.4 | 0.0 | 0.0 | |
| Friends Relative | 6 | 0 | 1 | 3 | 3 | 0 | 0 | 13 |
| | 46.2 | 0.0 | 7.7 | 23.1 | 23.1 | 0.0 | 0.0 | 1.1 |
| | 7.0 | 0.0 | 3.8 | 5.3 | 10.3 | 0.0 | 0.0 | |
| | 0.5 | 0.0 | 0.1 | 0.3 | 0.3 | 0.0 | 0.0 | |
| Bar Drinking Party | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | 100.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 |
| | 1.2 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | |
| School | 3 | 1 | 1 | 0 | 0 | 0 | 0 | 5 |
| | 60.0 | 20.0 | 20.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.4 |
| | 3.5 | 0.9 | 3.8 | 0.0 | 0.0 | 0.0 | 0.0 | |
| | 0.3 | 0.1 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | |
| Unknown-Not Obse | 0 | 1 | 0 | 0 | 0 | 0 | 804 | 805 |
| | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 99.9 | 71.2 |
| | 0.0 | 0.9 | 0.0 | 0.0 | 0.0 | 0.0 | 99.9 | |
| | 0.0 | 0.1 | 0.0 | 0.0 | 0.0 | 0.0 | 71.1 | |
| N.A. | 0 | 3 | 0 | 0 | 0 | 0 | 1 | 4 |
| | 0.0 | 75.0 | 0.0 | 0.0 | 0.0 | 0.0 | 25.0 | 0.4 |
| | 0.0 | 2.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| | 0.0 | 0.3 | 0.0 | 0.0 | 0.0 | 0.0 | 0.1 | |
| Column Total | 86 | 110 | 26 | 57 | 29 | 18 | 805 | 1131 |
| | 7.6 | 9.7 | 2.3 | 5.0 | 2.6 | 1.6 | 71.2 | 100.0 |

TABLE 10,29.21. SAFETY HELMET USE AND TRIP LENGTH

| Trip Length | Count Row Pct Col Pct Tot Pct | Helmet Use | | Total |
|--------------------|--|------------|-------|-------|
| | | No | Yes | |
| 0-1 Miles | 36 | 14 | so | 8.5 |
| | 72.0 | 28.0 | | |
| | 11.3 | 5.1 | | |
| | 6.1 | 2.4 | | |
| 1-5 Miles | 99 | 68 | 167 | 28.3 |
| | 59.3 | 40.7 | | |
| | 31.1 | 25.0 | | |
| | 16.8 | 11.5 | | |
| 5-50 Miles | 157 | 156 | 313 | 53.1 |
| | 50.2 | 49.6 | | |
| | 49.4 | 57.4 | | |
| | 26.6 | 26.4 | | |
| More than 50 Miles | 26 | 34 | 60 | 10.2 |
| | 43.3 | 56.7 | | |
| | 8.2 | 12.5 | | |
| | 4.4 | 5.8 | | |
| Column Total | 318 | 272 | 590 | |
| | 53.9 | 46.1 | 100.0 | |

TABLE 10.29.22. SAFETY HELMET USE BY DAYS
PER WEEK RIDING MOTORCYCLES

| Days per Week | Count Row Pct Col Pct Tot Pct | Helm Use | | Total |
|---------------|--|----------|------|--------|
| | | No | Yes | |
| 0 | | 2 | 0 | 2 |
| | | 100.0 | 0.0 | 0.3 |
| | | 0.6 | 0.0 | |
| | | 0.3 | 0.0 | |
| 1 | | 16 | 11 | 27 |
| | | 59.3 | 40.7 | 4.2 |
| | | 4.9 | 3.4 | |
| | | 2.5 | 1.7 | |
| 2 | | 17 | 22 | 39 |
| | | 43.6 | 56.4 | 6.0 |
| | | 5.2 | 6.8 | |
| | | 2.6 | 3.4 | |
| 3 | | 29 | 16 | 45 |
| | | 64.4 | 35.6 | 7.0 |
| | | 8.9 | 5.0 | |
| | | 4.5 | 2.5 | |
| 4 | | 20 | 8 | 28 |
| | | 71.4 | 28.6 | 4.3 |
| | | 6.2 | 2.5 | |
| | | 3.1 | 1.2 | |
| 5 | | 35 | 97 | 132 |
| | | 26.5 | 73.5 | 20.4 |
| | | 10.8 | 30.1 | |
| | | 5.4 | 15.0 | |
| 6 | | 18 | 38 | 56 |
| | | 32.1 | 67.9 | 8.7 |
| | | 5.5 | 11.8 | |
| | | 2.5 | 5.9 | |
| 7 | | 188 | 130 | 318 |
| | | 59.1 | 40.9 | 49.1 |
| | | 57.8 | 40.4 | |
| | | 29.1 | 20.1 | |
| Column Total | | 325 | 322 | 647 |
| | | 50.2 | 49.8 | 1.00.0 |

TABLE 10.30.1. **AUTOMOBILE/MOTORCYCLE REGISTRATIONS**
LOS ANGELES COUNTY, 1976-1979

| Year | $\frac{\text{Automobile Registrations}}{\text{Motorcycle Registrations}}$ | Ratio |
|------|---|-------|
| 1976 | $\frac{3,822,277}{198,325}$ | 19.8 |
| 1977 | $\frac{3,842,960}{185,417}$ | 20.8 |
| 1978 | $\frac{3,922,701}{178,744}$ | 21.9 |
| 1979 | $\frac{3,958,396}{192,465}$ | 20.6 |

It is important to note that motorcycle registrations comprise one for every 20.8 automobile registrations. However, comparable data taken from Table 10.3.1, which defines median traffic flow on the motorcycle roadway in **a one** hour period, shows only one motorcycle for every 175 automobiles. This represents a spectacular proportion of the registered motorcycles that simply are not on the street.' Seven out of eight registered motorcycles are in the garage or stored!

This terrific **gap** between registrations **and** actual traffic exposure clearly indicates that studies of motorcycle accidents which utilize vehicle registrations as a measure of motorcycle use and exposure to accidents suffer a serious methodological gap. In previous time, the National Motor Vehicle Safety Advisory Council had recognized such a problem and recommended concurrent exposure and accident data collection. Comparisons of accident data **and motorcycle rider license** and vehicle registrations are completely without merit.

Driver Licenses

The proportion of licensed drivers with the **Class 4** (motorcycle) endorsement was compared to the larger population of Class 3 (automobile) license holders, **as** shown in Table 10.30.2. It should be noted that roughly **99%** of Class 4 endorsement holders also have a Class 3 License.

Age and sex data on Class 3 licensed car drivers in Los Angeles County were gathered for 1977, 1978 and 1979, and these data are shown in Tables 10.30.3 (appendix **D.1**), 10.30.4 (Appendix **D.1**) and 10.30.5 (appendix **D.1**) respectively. The median age for licensed car drivers in 1977 was 31.9 years; for 1978 it was 31.7, and 31.6 for 1979.

TABLE 10.30.2. **AUTOMOBILE/MOTORCYCLE** LICENSE QUALIFICATION
LOS ANGELES COUNTY, 1977-1979

| Year | $\frac{\text{Class 3 Licenses}}{\text{Class 4 Endorsements}}$ | Ratio |
|------|---|-------|
| 1977 | $\frac{4,375,646}{196,055}$ | 22.3 |
| 1978 | $\frac{4,481,432}{204,598}$ | 21.9 |
| 1979 | $\frac{4,535,235}{202,705}$ | 22.4 |

Age and **sex** data on Class 4 licensed motorcycle riders in Los Angeles County were gathered for 1977, 1978 and 1979, and these data are shown in Tables 10.30.6 (Appendix D.1), 10.30.7 (Appendix D.1) and 10.30.8 (Appendix D.1) respectively. The most significant part of these data is that the female motorcycle riders maintain motorcycle licenses far beyond their representation in actual traffic.

11.0 COMPARISONS OF ACCIDENT AND EXPOSURE DATA

Conspicuity Factors

11.1 Motorcycle Size-Engine Displacement

Since conspicuity of the motorcycle is affected by the size, shape and contrast of the **forward** profile of the motorcycle, it is clearly possible that big motorcycles are more **conspicuous** than small motorcycles. Since no silhouette was measured for the motorcycle and rider, the most convenient representation of size is the engine displacement. Table 11.1.1 shows the known **motorcycle** displacements in three groups for the exposure and accident data.

TABLE 11.1.1. **COMPARISON** OF MOTORCYCLE SIZE IN
ACCIDENT AND **EXPOSURE** DATA

| Engine Displacement, cc. | Exposure Data | OSID Date | TAR Data |
|---|-----------------------|-----------------------|-----------------------|
| 0-250 Small, lightweight motorcycles, mopeds, minibikes, scooters. | 15.1% (314) | 22.6% (203) | 25.1% (536) |
| 251-500 Medium motorcycles | 25.5% (530) | 36.4% (327) | 40.4% (865) |
| Greater than 501 Large and heavyweight motorcycles | 59.4% (1233) | 41.1% (369) | 34.5% (738) |
| Total Known Size | (2077) | (899) | (2139) |

In these data of Table 11.1.1 the group of mopeds, minibikes, scooters, small and lightweight motorcycles are significantly overrepresented in the accident data. However, the medium motorcycles are also significantly **over-**represented in these accident data. The large and heavyweight motorcycles are significantly underrepresented in the accident data, supporting the proposition that big motorcycles could be more conspicuous and less **accident-**involved.

There are many factors which can contribute to reducing accident **involvement** for large motorcycles. In **this** analysis, only engine displacement is the measure used and it is sure that other effects contribute. For example, large motorcycles are more likely to be equipped with conspicuous fairings and windshields, and skilled riders with less risk-taking tendencies.

A final effect for consideration is the chronological fault of the exposure data. In the period of time between the collection of accident and exposure data, there was an apparent increase in the large and heavyweight motorcycles in the population-at-risk. There is the expectation that the

exposure data may portray an excess of large and heavyweight motorcycles. Therefore, the favorable underrepresentation of big motorcycles in the accident data may be due in part to the increase in the population past the time of the accident.

A collection of supplementary data regarding local sales of large and heavyweight motorcycles was made to estimate the effect of the sales of large motorcycles of 1978 and 1979 models. These estimates do not change the significant underrepresentation of the large and **heavyweight motorcycles** in these accident data.

11.2 Motorcycle Color

A view of the front of the motorcycle and rider is not likely to show much of the color of the motorcycle. That front view will expose the rider face and front of the helmet, the rider upper torso garment, the headlamp and front turn signals-running lights, handlebars, front forks, tire and wheel, and engine and head pipes. Perhaps a part of the forward surfaces of the gas tank and side panels will expose some of the basic color scheme. Those parts of the motorcycle so exposed are not likely to present any of the basic color of the motorcycle. Only when the motorcycle is equipped with a fairing will that color of the fairing predominate and have any prospect of contribution to conspicuity.

The principal colored surfaces which have any real potential for contribution to conspicuity are the fairing-shield and rider upper torso garment. Otherwise, the distant front view and conspicuity of any motorcycle is not likely to be affected by motorcycle color. It is far more likely that motorcycle color would associate best with rider personality, or simply model color availability.

Table 11.2.1 shows the motorcycle predominating color for the accident and exposure data. The predominating color of white is significantly **under-**represented in these accident data and there is an important association of this color. There are not many white motorcycles, but there are a lot of motorcycles with white fairings and this is the critical contribution to the underrepresentation in accidents. The large white surface is a critical contribution to conspicuity to reduce accident involvement, and this conclusion is not adversely affected by the chronological fault of the exposure data.

The motorcycles with predominating colors of yellow and orange show a significant overrepresentation in these accident data. The last three years of motorcycle production has introduced a spectacular number of yellow dirt bikes but essentially no yellow or orange street bikes. This **overrepresenta-**tion of yellow and orange motorcycles in accidents is not factual but due to the chronological fault of the exposure data. This is an unfortunate situation because bright orange and yellow are high visibility colors and have the potential of increasing motorcycle conspicuity.

Brown motorcycles are also rare in current time and not considered to be actually overrepresented in accidents. Black motorcycles are shown to be significantly underrepresented in these accident data, but black has been

TABLE 11.2.1. COMPARISON OF MOTORCYCLE COLOR IN ACCIDENT AND EXPOSURE DATA

| Motorcycle Predominating Color | Exposure Data | | 900 OSIDs | | 3600 TARs | |
|--------------------------------|---------------|---------|-----------|---------|-----------|---------|
| | count | Percent | count | Percent | count | Percent |
| white | 142 | 7.2 | 44 | 4.9 | 93 | 2.8 |
| Yellow | 69 | 3.5 | 44 | 4.9 | 168 | 5.0 |
| orange | 115 | 5.8 | 93 | 10.4 | 259 | 7.8 |
| Black | 489 | 24.8 | 109 | 12.1 | 563 | 16.9 |
| Brown | 96 | 4.9 | 70 | 7.8 | 223 | 6.7 |
| Blue | 335 | 17.0 | 163 | 18.2 | 577 | 17.3 |
| Red | 414 | 21.0 | 199 | 22.2 | 746 | 22.4 |
| Purple | 31 | 1.6 | 32 | 3.6 | 73 | 2.2 |
| Green | 115 | 5.8 | 66 | 7.3 | 295 | 8.8 |
| Silver/Gray | 97 | 4.9 | 23 | 2.6 | 99 | 3.0 |
| Gold | 48 | 2.4 | 42 | 4.7 | 145 | 4.3 |
| Metal Flake | 4 | 0.2 | 3 | 0.3 | 2 | 0.1 |
| Others | 14 | a.7 | 10 | 1.1 | 93 | 2.8 |
| Unknown | 341 | -- | 2 | --- | 264 | -- |
| TOTAL | 2310 | | 900 | | 3600 | |

the most popular color of the last three or four years models of street bikes. Consequently, the chronological fault of the exposure data precludes an accurate **estimate** of the effect of this color.

Blue and **red** show no significant differences in the exposure and accident populations, and there is the prospect of sample time differences contributing to this comparison.

11.3 Motorcycle Modifications Which Affect Conspicuity

As viewed by the driver of the other vehicle in the most frequent accident configurations, the motorcycle and rider is a relatively narrow silhouette. In this way, it would be expected that any increase of the apparent width-and height--the motorcycle silhouette would increase **conspicuity** and reduce accident involvement. The addition of a fairing and windshield would create an increase in the width and height of the frontal profile of the motorcycle, and tend to increase conspicuity. In addition, if the fairing were of light color contrasting with the adverse background, and if the fairing had an active contribution to conspicuity such as the "Leading Edge Lights" of the Vetter Windjammer **fairing**, the increase in conspicuity would be considerable.

The **comparison** of accident and exposure data for windshield and fairing use is shown in Table 11.3.1. Both windshield and fairing equipped motorcycles are shown to be significantly less accident-involved. The motorcycles equipped with **fairings** were usually equipped with windshields, and those motorcycles equipped with windshields only were usually equipped with a clear, full windshield mounted to the steering or handlebars.

TABLE 11.3.1. **COMPARISON** OF WINDSHIELD AND FAIRING FREQUENCIES IN ACCIDENT AND **EXPOSURE** DATA

| A. Windshields -With or Without Fairings | Exposure Data | Accident Data | TOTAL |
|---|---------------|---------------|-------|
| Windshield | 414 | 108 | 522 |
| No Windshield | 1711 | 792 | 2503 |
| TOTAL | 2125 | 900 | 3025 |
| $(\chi^2 = 24.27)$ | | | |
| B. Fairings -With or Without Windshields | Exposure Data | Accident Data | TOTAL |
| Fairing | 261 | 78 | 339 |
| No Fairing | 1864 | 822 | 2686 |
| TOTAL | 2125 | 900 | 3025 |
| $(\chi^2 = 7.95)$ | | | |

A limit to the interpretation is necessary because of the chronological fault of the exposure data. The **use of** frame mounted **fairings** apparently increased during the time between accident data collection and exposure data collection, but the increase is not quantified.

11.4 Headlamp Use

The majority of motorcycle accidents present a front view of the motorcycle and rider to the driver of the other vehicle, i.e., the sum of the precrash lines-of-sight for 10, 11, 12, 1 and 2 o'clock directions from the motorcycle is 90.4%. This clearly establishes the conspicuity problem as relating to the frontal surfaces of the motorcycle. In this area, the highest contrast possible is provided by an operating headlamp. This prospect of significant contribution to conspicuity attracted much effort during the data collection. Much detailed accident investigation produced precise information on headlamp function and accurate reconstruction of the accident events. Also, the collection of exposure data focused on accurate headlamp information.

During the period of time between accident data collection and exposure data collection, a large number of newer model motorcycles incorporated the "automatic-on" headlamp function to provide increased conspicuity for those motorcycles. In part, this change in the population-at-risk represents another chronological fault of the exposure data. However, most of the "automatic-on" headlamp motorcycles can be extracted from the data by identifying the 1978 and 1979 models within the total exposure data. Also, a reinforcement of exposure data was provided independent of this research activity to establish a benchmark for helmet and headlamp use.

The data relating the effect of headlamp use on **conspicuity** are shown in Table 11.4.1. Within this table are shown the accident and exposure data for headlamp use, for daylight, dusk-dawn, and nighttime. The **exposure** data are shown for all known cases of **headlamp** use (a) then the exposure data are modified by extracting the part of the data related to 1978 and 1979 models (b). The accident data are shown for all known cases of headlamp use (a) then modified by presenting those cases where the precrash lines-of-sight were 11, 12, and 1 o'clock direction from the motorcycle.

TABLE 11.4.1. EFFECT OF HEADLAMP USE ON CONSPICUITY COMPARISON OF ACCIDENT AND EXPOSURE DATA

| Daylight | Known Headlamp Use | | TOTAL |
|---|--------------------|-----|-------|
| | On | Off | |
| a. Exposure Data Total | 1006 | 463 | 1469 |
| b. Exposure Data without 1978-1979 models | 657 | 416 | 1073 |
| c. Exposure Data for 1978-1979 Models | 349 | 47 | 396 |
| d. Accident Data Total | 166 | 359 | 525 |
| e. Accident Data for 11-12-1 o'clock pra-crash lines-of-sight | 137 | 265 | 402 |
| <u>Dusk-Dawn</u> | | | |
| a. | 188 | 76 | 264 |
| b. | 146 | 73 | 219 |
| c. | 42 | 3 | 45 |
| d. | 17 | 22 | 39 |
| e. | 13 | 18 | 31 |
| <u>Night</u> | | | |
| a. | 289 | 14 | 303 |
| b. | 237 | 13 | 250 |
| c. | 52 | 1 | 53 |
| d. | 114 | 7 | 121 |
| e. | 87 | 7 | 94 |

Note: On is equipped and on; Off is not on, not equipped, or not operating; Unknowns are not included.

The data of Table 11.4.1 show that those motorcycles using headlamps on in daylight are underrepresented in the accident data in a spectacular fashion. For example, consider the comparison of the modified exposure data and accident data for daylight conditions as follows:

| | <u>Headlamp On</u> | <u>Headlamp Off</u> | <u>TOTAL</u> |
|---|------------------------|-------------------------|--------------|
| Daylight Exposure Cases, No 78 and 79's | 657 | 416 | 1073 |
| Daylight Accident Data | <u>166</u> | <u>359</u> | 525 |
| TOTAL | 823 | 775 | 1598 |

$$(\chi^2 = 122.6)$$

In this comparison, the motorcycles with headlamps-on during daylight are **underrepresented** in the accident data almost by a factor of **TWO!** The modified daylight exposure cases (No 78 and 79's) appears to be **a credible** representation of the time of the accident data when compared with the separate benchmark data. The modified exposure data specifies 61.2% headlamp use and the benchmark data specifies 62.0% headlamp **use** (734 On, 449 Off, 1183 TOTAL known).

The data of **Table 11.4.1** show that those motorcycles using headlamps on in dusk-dawn are also significantly underrepresented in the accident data.

'The data of Table 11.4.1 **show** no important differences between night accidents and night exposure data. However, the implication is serious since being on the roadway at night without an operating headlamp is a high risk. Case by case review of the accidents of those motorcycles without operating headlamp showed accident involvement clearly related to some failure to see or be seen by other traffic.

The data shown in Table 11.4.1 provide a powerful argument for the use of the headlamp-on during all times of motorcycle operation. Recall from previous vehicle factors **data** that more than 90% of the accident-involved motorcycles with headlamp on had low beam selected. This argument in favor of the headlamp-on during all times of motorcycle operation is sure to be more powerful for high beam selected, especially in daylight where the contrast conspicuity *need is great*.

A final observation **is** the number of 1978 and 1979 models where the "automatic-on" headlamp was defective or intentionally disabled. A spot check of such models shows that at least 6% of these observed models have intentionally disabled "automatic-on" function and a selector switch has been installed.

11.5 High Visibility Upper Torso Garment

When the motorcycle is not equipped with a **fairing**, a large part of the frontal surface exposed is the upper torso of the motorcycle rider. Consequently the use of an upper torso garment which presents a large surface with a high visibility color can contribute greatly to conspicuity. A comparison of accident and exposure upper torso garment data is shown in Table 11.5.1. These data show a significant advantage of the motorcycle rider wearing a bright, high visibility yellow Yamaha jacket, orange **Electro** jacket, etc.

TABLE 11.5.1. HIGH VISIBILITY UPPER **TORSO GARMENT** USE IN ACCIDENT AND EXPOSURE DATA

| High Visibility Upper Torso Garment Worn | Exposure Data | Accident Data | TOTAL |
|--|-----------------|---------------|-------|
| Yes | 112 | 2 | 114 |
| No | 2072 | 886 | 2958 |
| TOTAL | 2184 | 888 | 3072 |
| | $\chi^2 = 41.1$ | | |

11.6 Helmet Color

The view of the front of the motorcycle and rider will expose very little of a helmet surface, unless the helmet is full facial coverage. The largest area of color **exposed** by a full facial coverage helmet is no more than one-fifth that of an upper torso garment. Thus expectations that color of any contemporary helmet **can** affect conspicuity should be low.

Table 11.6.1 shows a comparison of helmet colors in the accident and exposure data. The frequency of white helmets in both accident and exposure data is high, and the reason is **simply** that white is the most commonly produced helmet color. The only color with significant difference between accident and exposure data is black. The explanation for the black helmet being overrepresented in the exposure data is the chronological fault of the exposure data. During the last three or four years, the popularity - hence production and use - of black helmets increased considerably.

This same chronological fault does not allow any meaningful evaluation of other helmet color contribution.

TABLE 11.6.1. HELMET COLOR CONTRIBUTION TO CONSPICUITY COMPARISON OF EXPOSURE AND ACCIDENT DATA

| Helmet Predominating Color | Exposure Data | | OSIDI Accident Data | |
|----------------------------|---------------|---------------|---------------------|---------------|
| | | | | |
| white | 433 | (38.6%) | 125 | (37.7%) |
| Yellow | 45 | (4.0%) | 11 | (3.3%) |
| orange | 95 | (8.5%) | 36 | (10.8%) |
| Black | 172 | (15.3%) | 20 | (6.0%) |
| Brown | 10 | (0.9%) | 13 | (3.9%) |
| Blue | 90 | (8.0%) | 42 | (12.7%) |
| Red | 112 | (10.0%) | 46 | (13.9%) |
| Purple | 3 | (0.3%) | 3 | (0.9%) |
| Green | 18 | (1.6%) | 5 | (1.5%) |
| Silver/Gray | 87 | (7.8%) | 20 | (6.0%) |
| Gold | 53 | (4.7%) | 8 | (2.4%) |
| Others | 4 | (0.4%) | 3 | (0.9%) |
| TOTAL | 1122 | (100.0%) | 332 | (100.0%) |
| Unknown | 190 | | 29 | |

Motorcycle Rider Licensing and Training

11.7 Driver License Qualification

Table 11.7.1 provides a comparison of the license qualification for the motorcycle riders in the **exposure and** accident data. These data show that the accident-involved motorcycle rider is:

- (i) Significantly without any license
- (ii) Significantly without a motorcycle license.

Between the times of accident and exposure data collection, there was an increase in the **number** of motorcycle license (Class 4) holders in Los Angeles County. **However**, during this period of time, that increase was never greater than approximately 6% so the significance of the unlicensed riders is not diminished due to this change.

The success in the collection of exposure data depended greatly upon rider cooperation. At each exposure site, passing riders stopped voluntarily for interview and motorcycle examination. Several did not stop, and follow-up was attempted after vehicle license and registration identification. Many factors could affect this cooperation at the exposure site, or cooperative response to follow-up inquiry. The rider could be wary of government or law enforcement activity, improperly licensed, unauthorized to use the motorcycle, late for work, alcohol or drug involved, etc. None of these factors **would** logically relate that these noncooperating riders were better licensed than the cooperating riders. In this way, the exposure data are considered to be an acceptable representation of unlicensed riders.

TABLE 11.7.1. DRIVER LICENSE QUALIFICATION KNOWN RIDER
LICENSE STATUS

| License | Exposure Data | | 900 OSIDI Data | | 3600 TAR Data | |
|-----------------------------|---------------|---------|----------------|---------|---------------|---------|
| | count | Percent | Count | Percent | Count | Percent |
| None (including revoked) | 33 | 4.9 | 106 | 12.0 | 373 | 11.9 |
| Class 1 | 14 | 2.1 | 14 | 1.6 | | |
| Commercial | | | | | | |
| Class 2 | 9 | 1.3 | 1 | 0.1 | | |
| Chaffeur | | | | | | |
| Class 3 | 97 | 14.3 | 256 | 28.7 | 1075 | 34.3 |
| Standard | | | | | | |
| Class 4 | 508 | 74.9 | 483 | 54.5 | 1589 | 50.7 |
| Motorcycle Permit | 17 | 2.5 | 27 | 3.0 | 96 | 3.1 |
| TOTAL | 678 | 100.0 | a87 | 100.0 | 3133 | 100.0 |

11.8 Motorcycle Rider Training Experience

During the period of accident data collection, there was very little specialized motorcycle training available to the motorcycle rider. Most of the accident-involved motorcycle riders were self-taught, or "learned" from friends and family, which offers very little transfer of factual information. **This** group was 92.0% of all the accident-involved riders.

During the period of exposure data collection, there was yet very little specialized motorcycle training available to **the motorcycle** rider. A **comparison** of the exposure and accident data of Table 11.8.1, shows that 84.3% of those riders were also self-taught, or learned from friends and family. However, while the greatest part of the population-at-risk is untrained, the trained motorcycle riders are significantly underrepresented in the accident data. The trained motorcycle rider is underrepresented in the accident data by an approximate factor of TWO.

TABLE 11.8.1. MOTORCYCLE RIDER KNOWN TRAINING EXPERIENCE

| Known Training | Exposure Data | | OSID Accident Data | |
|----------------------------|---------------|---------|-----------------------|---------|
| | count | Percent | count | Percent |
| Self-Taught | 382 | 57.0 | 400 | 49.5 |
| Friends-Family | 183 | 27.3 | 343 | 42.5 |
| School-Club M/C Course | 68 | 10.1 | 41 | 5.1 |
| Professional AMA, AFM, FIM | 36 | 5.4 | 20 | 2.5 |
| Others | 1 | 0.1 | 4 | 0.5 |
| TOTAL | 670 | 100.0 | 808 | 100.0 |

11.9 Motorcycle Rider Street Bike Experience

The most **common** method of acquiring skills for riding a motorcycle in traffic is experience. Supposedly, the acquisition of experience will develop riding skills, collision avoidance skills, traffic strategy, etc. and thus prepare the motorcycle rider to **deal** with traffic hazards. The only obstacle within this system is the prospect of accident experience:

Just how much experience must be acquired to insulate the motorcycle rider?

Table 11.9.1 compares the motorcycle rider street bike experience for exposure and accident data. Both measures of experience are included: total experience and experience on the observed (or accident-involved) motorcycle. In this tabulation, the inexperienced riders (C-6 months) have significant overrepresentation in the accident data, with the most significant measure being the experience on the observed (or accident-involved) motorcycle. Beyond six months experience, the comparison is not illuminating until very high experience levels are reached. That group of riders with very high experience (>48 months) have a significant underrepresentation in the accident data, with the most significant measure being the experience on the observed (or accident-involved) motorcycle.

TABLE 11.9.1. MOTORCYCLE RIDER STREET BIKE EXPERIENCE

| Known Experience | Exposure Data | | Accident Data | |
|------------------|------------------|------------------------|------------------|------------------------|
| | Total Experience | On Observed Motorcycle | Total Experience | On Accident Motorcycle |
| 0-6 months | 84 (13.7%) | 247 (40.4%) | 156 (19.1%) | 491 (57.4%) |
| 7-12 months | 64 (10.5%) | 141 (23.1%) | 83 (10.1%) | 136 (15.9%) |
| 13-24 months | 86 (14.1%) | 105 (17.2%) | 107 (13.1%) | 112 (13.1%) |
| 25-36 months | 46 (7.5%) | 37 (6.1%) | 93 (11.4%) | 63 (3.0%) |
| 37-48 months | 49 (8.0%) | 25 (4.1%) | 64 (7.8%) | 26 (3.0%) |
| >48 months | 282 (46.2%) | 56 (9.2%) | 315 (38.5%) | 27 (3.2%) |
| TOTAL | 611 | 611 | 818 | 855 |

The conclusions are concise. Inexperience is excessively associated with accident involvement: and inexperience is best measured by the subject motorcycle. High levels of experience are underrepresented in accidents, but how is that considerable experience obtained without exposure to accidents? In these data shown, experience levels between seven months and four years does not clearly distinguish that experience as beneficial. Only when the **experience** is much greater than four years is there a significant benefit demonstrated.

It appears that specialized motorcycle rider training is the alternative which reduces **risk**; the acquisition of traffic experience only is simply accident exposure by comparison.

11.10 Dirt Bike Experience

Table 11.10.1 shows the dirt bike experience for the exposure and accident data. In these data, the motorcycle rider with some kind of dirt bike experience is significantly underrepresented in the accident data.

TABLE 11.10.1. DIRT BIKE EXPERIENCE

| <u>Known</u> Dirt Bike Experience | Exposure Data | Accident Data | TOTAL |
|-----------------------------------|---------------|---------------|-------|
| None | 232 | 595 | 827 |
| Yes | 392 | 238 | 630 |
| TOTAL | 624 | 833 | 1457 |
| $(\chi^2 = 169.1)$ | | | |

Motorcycle Rider Characteristics

11.11 M o t o r c y c l e

Table 11.11.1 shows a comparison of exposure and accident data for age of the accident-involved motorcycle rider. Figure 11.11.2 presents these same data by graph for comparison.

The first comparison necessary is between the on-street Exposure Data and the 1977 and 1978 Los Angeles County Class 4 Registrations. These two sets of data differ significantly in many of the age groups, and portray much contrast between license registration and actual street traffic. The most substantial difference shows that riders of age beyond 35 participate in this traffic much less than in the licensed population. Also, it shows that the age groups 16-19, 25-29, and 30-34 participate in this traffic much more than in the licensed population.

The two sets of accident data shown are for the 900 on-scene, in-depth investigations and the 3600 traffic accident report cases. When these accident data are compared with the exposure data, it is clear that the motorcycle riders beyond age 50 contribute few accidents and are generally underrepresented in the accident data. Also, the motorcycle riders in the age groups between 30 and 50 are significantly underrepresented in these accident data, and the age groups between 16 and 24 are significantly over-represented. This comparison identifies the age group between 16 and 24 as candidates for countermeasures of training and licensing. Recall from the Table 11.11.1 that there are many of the accident-involved riders below the

TABLE 11.11.1. MOTORCYCLE RIDER AGE DATA

| Age Groups | Exposure Data | | 1977 LA County Average | | 900 OSID Accident Data | | 3600 TARs Accident Data | |
|-------------|---------------|-----------|------------------------|-----------|------------------------|-----------|-------------------------|-----------|
| | Count | Frequency | Count | Frequency | Count | Frequency | Count | Frequency |
| 16-19 | 94 | .1506 | 17703 | .0884 | 107 | .1201 | 742* | .2118 |
| 20-24 | 144 | .2308 | 49377 | .2465 | 299 | .3356 | 1202 | .3431 |
| 25-29 | 138 | .2212 | 40083 | .2001 | 210 | .2357 | 712 | .2033 |
| 30-34 | 119 | .1907 | 29335 | .1464 | 121 | .1358 | 381 | .1088 |
| 35-39 | 52 | .0833 | 19074 | .0452 | 67 | .0752 | 196 | .0560 |
| 40-44 | 31 | .0497 | 13669 | .0682 | 29 | .0325 | 97 | .0277 |
| 45-49 | 24 | .0385 | 11384 | .0568 | 22 | .0247 | 73 | .0208 |
| 50-54 | 8 | .0128 | 8405 | .0445 | 13 | .0146 | 51 | .0146 |
| 55-59 | 6 | .0096 | 6057 | .0302 | 13 | .0146 | 30 | .0086 |
| 60-64 | 4 | .0064 | 3136 | .0157 | 6 | .0067 | 13 | .0037 |
| 65-69 | 2 | .0032 | 1208 | .0060 | 2 | .0022 | 3 | .0009 |
| 70-74 | 2 | .0032 | 345 | .0017 | 1 | .0011 | 0 | 0 |
| 75-79 | 0 | 0 | 42 | .0002 | 1 | .0011 | 3 | .0009 |
| 80-84 | 0 | 0 | 10 | | 0 | 0 | 0 | 0 |
| 85-89 | 0 | 0 | 3 | | 0 | 0 | 0 | 0 |
| 90-99 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Known TOTAL | 624 | | 200331 | | 891 | | 3503 | |
| Unk. | 1686 | | | | 9 | | 97 | |
| TOTAL | 2310 | | | | | | | |

*Includes 45 < 16 years

legal licensing age (45 of 742) and many without any license, permit or endorsement for motorcycle operation hence law enforcement countermeasures are appropriate.

11.12 Motorcycle Rider Sex, Marital Status, Children

Table 11.12.1 shows the sex of the motorcycle riders in the accident and exposure data. This comparison shows that the few female riders appear in few accidents, but are significantly overrepresented in these accidents. A review of the characteristics of those accidents involving female riders showed young riders, low experience, small motorcycles, and inferior collision avoidance action. Also, note that use of driver license registration does not reflect this excess accident involvement.

The exposure data is compared with accident data collection and it shows that the female **motorcycle** rider is less than 1.6% of the population-at-risk in this study area.

Table 11.12.2 shows the comparison of the number of children for the motorcycle riders in the accident and exposure data. No significant **differences** are shown between the accident-involved riders and the **population-at-risk**.

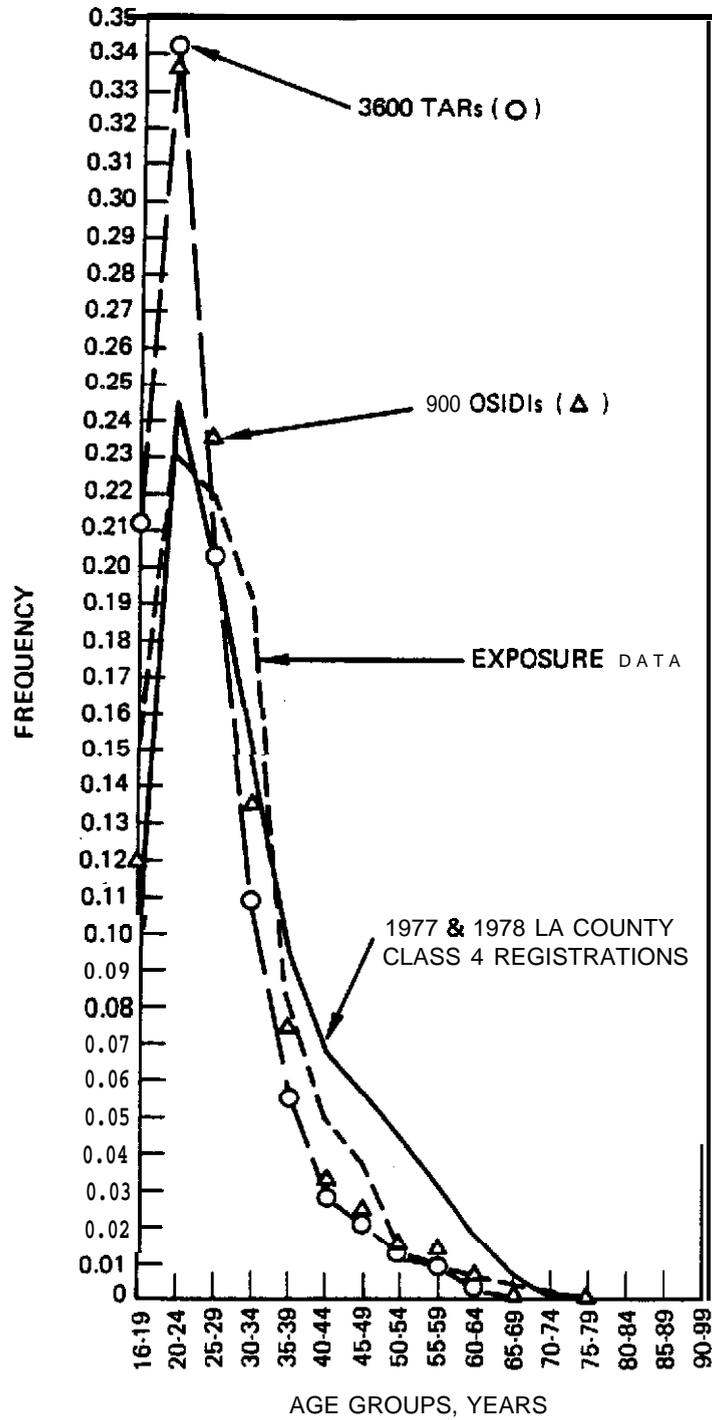


FIGURE 11.11.2. COMPARISON OF ACCIDENT AND EXPOSURE DATA, AGE OF THE MOTORCYCLE RIDER.

TABLE 11.12.1. MOTORCYCLE RIDER SEX

| Known Rider Sex | 2310 Exposure Cases | 1977 and 1978 LA County Class 4 Average | 900 OSIDs | 3600 TARs |
|-----------------|------------------------|---|----------------|-----------------|
| Male | 2045 (32 (1.4%) | 140839 (95.26%) | 865 (96.1%) | 3454 (97.1%) |
| Female | | 9487 (4.74%) | 34 (3.8%) | 102 (2.8%) |

TABLE 11.12.2. MOTORCYCLE RIDER NUMBER OF CHILDREN

| Known Number of Children | Exposure Data | 900 OSIDs Accident Data |
|--------------------------|---------------|-------------------------|
| 0 | 418 (67.4%) | 572 (67.8%) |
| 1 | 69 (11.1%) | 109 (12.9%) |
| 2 | 80 (12.9%) | 84 (10.0%) |
| 3 | 29 (4.7%) | 37 (4.4%) |
| 4 | 14 (2.3%) | 22 (2.6%) |
| 5 | 8 (1.3%) | 10 (1.2%) |
| 6 | 1 (0.2%) | 5 (0.6%) |
| 7 | 1 (0.2%) | 5 (0.6%) |

Table 11.12.3 shows the marital status for the motorcycle riders in the accident and exposure data. The married rider is underrepresented in the accident data, but the single rider is not overrepresented. The only distinction with significance is that the "cohabitating" motorcycle rider is overrepresented in the accident data. Living-in-sin shows one more hazard.

TABLE 11.12.3. RIDER MARITAL STATUS

| Known Marital Status | Exposure Data | 900 OSIDs Accident Data |
|----------------------|---------------|-------------------------|
| Single | 373 (59.6%) | 515 (59.6%) |
| Married | 188 (30.0%) | 230 (26.6%) |
| Separated, Divorced | 50 (9.0%) | 84 (9.8%) |
| Widowed | 4 (0.6%) | 1 (0.1%) |
| Cohabitating | 11 (1.8%) | 34 (3.9%) |

11.13 Physical Characteristics

Comparison of accident and exposure data for motorcycle rider height and weight showed no significant differences. The distribution of recorded heights and weights was essentially the same for accident and exposure data.

11.14 Motorcycle Rider Education and Occupation

Table 11.14.1 shows the educational background of the motorcycle riders in the accident and exposure data. These data show a highly significant underrepresentation in the accident data for the motorcycle riders with a college degree. Also, these data show a highly significant **overrepresentation** in the accident data for the motorcycle rider with limited education, i.e. partial high school or less. Between these two extremes of education are at least 60% of the accident-involved motorcycle riders who are high school graduates, most with partial college training. Those riders with partial college training are significantly underrepresented in the accident data and the high school graduates are significantly overrepresented in the accident data.

TABLE 11.14.1. MOTORCYCLE RIDER EDUCATIONAL STATUS

| Known Education | Exposure Data | 900 OSID Accident Data |
|--------------------------|-------------------|------------------------|
| Grad School-Professional | 26 (4.2%) | 23 (2.8%) |
| College Graduate | a3 (13.4%) | 43 (5.2%) |
| Partial College | 237 (38.2%) | 297 (35.9%) |
| High School Graduate | 165 (26.6%) | 230 (27.8%) |
| Partial High School | 52 (14.8%) | 203 (24.5%) |
| Jr. High, Grammar School | 14 (2.3%) | 17 (2.1%) |
| Less than 7 years | 4 (0.6%) | 14 (1.7%) |

This comparison of educational status serves notice of limits for certain traditional **countermeasures**. High school Driver Education which includes specialized motorcycle safety instruction would not have reached one-fourth of these accident-involved riders. However, it would have reached a majority of the most significantly overrepresented groups. Also, safety education countermeasures with high intellectual content will not be correctly focused. A major target for safety education appears to be that group with high school education or less.

The observations of investigators during accident data collection were comparable to the previous comparison, but with additional specific observations. It was the general impression that the accident-involved motorcycle rider was not a typical motorcycle enthusiast. It seemed very rare that the **accident-involved** motorcycle rider had read contemporary motorcycle enthusiasts magazines, followed motorcycle racing activities, or understood such matters as "**conspicuity**", "countersteering", "brake balance", etc.

Table 11.14.2 shows the known occupations for the motorcycle riders in the accident and exposure data. The significant differences are as follows:

(i) Professionals, sales workers, and craftsmen are underrepresented in the accident data.

(ii) Laborers, students **and** unemployed (who were mostly laborers and craftsmen when employed) are overrepresented in the accident data.

TABLE 11.14.2. MOTORCYCLE RIDER OCCUPATION

| Known Occupation | Exposure Data | | Accident Data | | | |
|---------------------|---------------|--------------|---------------|--------------|-------------|--------------|
| | | | 900 OSIDIs | | 3600 TARs | |
| | Count | Percent | Count | Percent | Count | Percent |
| Professional | 102 | 15.0 | 64 | 7.3 | 184 | 7.8 |
| Administrative | 42 | 6.2 | 24 | 2.7 | 116 | 4.9 |
| Sales | 39 | 5.8 | 13 | 1.5 | 62 | 2.6 |
| Clerical | 44 | 6.5 | 62 | 7.1 | 121 | 5.2 |
| craftsmen | 148 | 21.8 | 155 | 17.7 | 312 | 13.3 |
| operatives | 15 | 2.2 | 8 | 0.9 | 64 | 2.7 |
| Transport | 19 | 2.8 | 27 | 3.1 | 92 | 3.9 |
| Laborers | 67 | 9.8 | 138 | 15.8 | 438 | 18.7 |
| Service Workers | 83 | 12.3 | 85 | 9.7 | 283 | 12.1 |
| Housewife | 0 | 0.0 | 3 | 0.3 | 8 | 0.3 |
| student | 89 | 13.1 | 185 | 21.2 | 486 | 20.7 |
| Military | 3 | 0.4 | 13 | 1.5 | 16 | 0.7 |
| Retired | 7 | 0.3 | 5 | 0.6 | 5 | 0.2 |
| Unemployed | 19 | 0.8 | 92 | 10.5 | 156 | 6.7 |
| Total Known | 677 | 100.0 | 874 | 100.0 | 2343 | 100.0 |

This comparison concisely describes students, laborers, and unemployed-as a target group for safety **education** and countermeasures.,

The chronological fault of the exposure data may reduce some significance assigned to the unemployed motorcycle rider participation in accidents. There was a reduction in the unemployed laborer population from approximately 11% during accident data collection to approximately 8% during exposure data collection. Also, in the circumstances of the interview it was less likely for the exposure interview to reveal the unemployed status. However, with these factors considered, the participation of the unemployed in the accident data is still considered a valid excess representation.

11.15 Motorcycle Rider Attention, Stress and Physiological Impairment

Table 11.15.1 provides a comparison of attention performance for the accident-involved motorcycle riders and those observed in the **population-at-risk**. The accident-involved riders show significantly less attention to traffic and driving tasks. While there are some few distractions to motorcycle operation, the major difference is that the accident population showed far greater basic attention problems with 19.1% operating in the inattentive mode.

Evaluation of associated factors does not completely explain this lack of attention to the driving tasks. The accident-involved motorcycle riders showed excess involvement with stress due to conflict with family and friends, and reward stress. **However**, these excess stress cases were few in number. Also, permanent physiological impairment was not involved or related although the temporary impairment from fatigue and hunger was overrepresented in the accident-involved motorcycle riders.

TABLE 11.15.1. MOTORCYCLE RIDER ATTENTION TO DRIVING TASK

| Known Attention Direction | Exposure Data | | Accident Data | |
|----------------------------------|---------------|--------------|---------------|--------------|
| | count | Percent | Count | Percent |
| Diverted to Surrounding Traffic | 417 | 22.7 | 106 | 12.6 |
| Diverted to Non-Traffic Item | 111 | 6.0 | 43 | 5.1 |
| Diverted to Motorcycle Operation | 31 | s.7 | 35 | 4.2 |
| Inattentive Mode | 11 | -0.6 | 16! | 19.1 |
| Focused on Driving Task | 1265 | 68.9 | 498 | 59.1 |
| TOTAL | 1835 | 100.0 | a43 | 100.0 |

11.16 Alcohol and Drug Involvement

Table 11.16 shows a comparison of exposure and accident data for alcohol and drug involvement. The comparison of known involvement for exposure cases and the on-scene in-depth cases shows an identical total involvement, 11.7%. However, the fatal accident cases show a total involvement of 43.1%, which is a highly significant overrepresentation.

TABLE 11.16.1. RIDER ALCOHOL AND DRUG INVOLVEMENT

| Known Rider Involvement | Exposure Data | | Accident Data | | | |
|-------------------------|---------------|--------------|---------------|--------------|-----------|--------------|
| | | | 900 OSIDs | | 54 FataIs | |
| | count | Percent | count | Percent | count | Percent |
| HBD-NUI | 47 | 8.0 | 35 | 4.0 | 7 | 13.7 |
| HBD-DUI | 4 | 0.7 | 37 | 4.2 | 12 | 23.5 |
| HBD Impairment Unknown | 9 | 1.5 | 23 | 2.6 | 1 | 2.0 |
| Drug Influence | 5 | 0.6 | 3 | 0.3 | 1 | 2.0 |
| Combination | 4 | 0.7 | 5 | 0.6 | 1 | 2.0 |
| None | 516 | 88.2 | 773 | 88.2 | 29 | 56.9 |
| TOTAL | 585 | 100.0 | 876 | 100.0 | 51 | 100.0 |

Two factors may have caused the accident-involved motorcycle rider data to show too low an involvement in alcohol and drug use. Many of the interviews of the motorcycle riders were unavoidably conducted in the presence or proximity of authority figures. Interviews in the emergency room with the nurse, doctor, policeman and family nearby would surely limit factual expressions of drug or alcohol use. Also, the accident-involved motorcycle rider would be less free to divulge alcohol and drug use than would the non accident-involved motorcycle rider who voluntarily stops for exposure data interview.

However, in the fatal accident cases, ethanol and barbiturate use is detected by toxicological examination and recorded during autopsy. In this way, it is confirmed that the alcohol and drug use is overrepresented in those most severe accidents.

11.17 Tattoos, Hand Preference

Table 11.17.1 shows a comparison of exposure and accident data for motorcycle rider tattoos. The tattooed riders are overrepresented in the 900 OSID data, and more significantly overrepresented in the fatal accident data. The exposure data would tend to increase the significance of these findings by showing a slightly lower incidence of tattoos in the population-at-risk at the time of the accident data collection.

TABLE 11.17.1. MOTORCYCLE RIDER TATTOOS

| Known Tattoos | Exposure Data | | Accident Data | | | |
|------------------|---------------|---------|---------------|---------|------------|---------|
| | | | 900 OSIDs | | 54 Fataals | |
| | count | Percent | Count | Percent | count | Percent |
| 0 | 489 | 84.2 | 631 | 80.0 | 38 | 71.7 |
| 1 | 48 | 8.3 | 75 | 9.5 | 6 | 11.3 |
| 2 | 12 | 2.1 | 43 | 5.4 | 3 | 5.7 |
| 3 | 8 | 1.4 | 15 | 1.9 | 2 | 3.8 |
| 4 | 11 | 1.9 | 8 | 1.0 | 1 | 1.9 |
| 5 | 3 | 0.5 | 2 | 0.3 | 1 | 1.9 |
| 6 | 7 | 1.2 | 4 | 0.5 | 1 | 1.9 |
| 7 or more | 3 | 0.5 | 11 | 1.4 | 1 | 1.9 |
| TOTAL Known | 581 | 100.0 | 789 | 100.0 | 53 | 100.0 |

The hand preference data for the motorcycle riders are shown in Table 11.17.2. In these data the left-handed motorcycle rider is not overrepresented in the accident data. The data collection techniques differed between accident and exposure data to the extent that right and ambidextrous should be combined for comparison. In this way, accident and exposure data are essentially equivalent (89.2% vs. 88.9%) and there is no significant distinction to rider hand preference.

TABLE 11.17.2. MOTORCYCLE RIDER HAND PREFERENCE

| Known Hand Preference | Exposure Data | | Accident Data | |
|-----------------------|---------------|---------|---------------|---------|
| | count | Percent | Count | Percent |
| Right | 502 | 80.7 | 712 | 85.4 |
| Left | 69 | 11.1 | 90 | 10.8 |
| Ambidextrous | 51 | 8.2 | 32 | 3.8 |
| TOTAL Known | 622 | 100.0 | 834 | 100.0 |

11.18 Motorcycle Rider Driving Record

Table 11.18.1 shows the driving record for the motorcycle rider by listing the accident and moving violation experience for the last two years. The motorcycle riders with moving violations are overrepresented in the accident data. This overrepresentation is with very high **significance** at all citation levels. The motorcycle riders with previous accidents are also significantly **overrepresented** in the accident data. In these data the citation experience is more significant than the accident experience.

TABLE 11.18.1. MOTORCYCLE RIDER VIOLATIONS AND ACCIDENTS LAST TWO YEARS

| Known Experience | Exposure Data | | Accident Data | |
|---------------------|---------------|---------|---------------|---------|
| | count | Percent | count | Percent |
| <u>Violations</u> 0 | 306 | 52.2 | 325 | 38.6 |
| 1 | 116 | 19.8 | 217 | 25.8 |
| 2 | 70 | 11.9 | 129 | 15.3 |
| 3 | 39 | 6.7 | 68 | 8.1 |
| 4 | .18 | 3.1 | 38 | 4.5 |
| 5 | 12 | 2.0 | 23 | 2.7 |
| 6 | 8 | 1.4 | 14 | 1.7 |
| More than 6 | 17 | 2.9 | 27 | 3.2 |
| TOTAL | 587 | 100.0 | 841 | 100.0 |
| <u>Accidents</u> 0 | 440 | 76.0 | 587 | 69.2 |
| 1 | 106 | 18.3 | 200 | 23.6 |
| 2 | 23 | 4.0 | 41 | 4.8 |
| 3 | 7 | 1.2 | 18 | 2.1 |
| 4 | 1 | 0.2 | 2 | 0.2 |
| 5 | 0 | 0.0 | 0 | 0.0 |
| 6 | 1 | 0.2 | 0 | 0.0 |
| More than 6 | 1 | 0.2 | 0 | 0.0 |
| TOTAL | 579 | 100.0 | 848 | 100.0 |

These comparisons of accident and exposure data reinforce positions regarding the combined action of law enforcement and training. The option of "traffic school" instead of fines for moving violations provides a viable contact with potential accident cases, where the education or training has the prospect of preventing future accident involvement.

11.19 Route Familiarity, Trip Plan, and Motorcycle Use

The characteristic patterns of motorcycle use portrayed by these data are complex, and in many ways contradicting. No neat, simple description **of motorcycle** use relates precisely to accident involvement.

Table 11.19.1 shows the days per week that the motorcycle rider uses a **motorcycle**. The outstanding comparison of accident and exposure data is that for "zero" days, where the accident-involved, or observed rider, uses a motorcycle much less than one-half day per week. This comparison shows that the occasional rider, although a small part of both accident and exposure populations, is spectacularly overrepresented in the accident data. Such excess involvement by the occasional operator is typical in many areas of accidents. **i.e.** aviation, maritime, industrial, etc.

TABLE 11.19.1. DAYS PER WEEK MOTORCYCLE RIDDEN

| Known Days | Exposure Data | | Accident Data | |
|------------|---------------|---------|---------------|---------|
| | Count | Percent | Count | Percent |
| 0 | 3 | 0.5 | 61 | 7.4 |
| 1 | 27 | 4.1 | 33 | 4.0 |
| 2 | 39 | 6.0 | 45 | 5.4 |
| 3 | 45 | 6.9 | 54 | 6.5 |
| 4 | 29 | 4.4 | 43 | 5.2 |
| 5 | 134 | 20.5 | a6 | 10.4 |
| 6 | 58 | a.9 | 39 | 4.7 |
| 7 | 320 | 48.9 | 468 | 56.5 |
| TOTAL | 655 | 100.0 | 829 | 100.0 |

Other significant differences within Table 11.19.1 provide contradiction: The S-day rider is underrepresented in the accident data but the 7-day rider is overrepresented. An appropriate **explanation-which** is supported by other **data-is** that the work oriented travel may be less accident-involved than shopping-errands, friends-family or entertainment-recreation oriented travel.

Table 11.19.2 shows the comparison of accident and exposure data for the motorcycle rider familiarity with the roadway. When frequent* use of the roadway is compared with infrequent use, the infrequent use is overrepresented in the accident data. The only significant factor in these accident data is the motorcycle rider who had never before been on the road at the accident scene. This result relates a true need for caution by the motorcycle rider when traveling on unfamiliar roadways.

Table 11.19.3 shows a comparison of the time riding before the accident or observation at the exposure site. **These** data show clearly that the accident occurs relatively close to the origin of the trip and only a short time after departure. The short trip, end the short time riding before the accident, is a special feature of the accident-involved motorcycle rider. Note that 95% of the accidents occurred within the first hour; 50% occurred within the first six minutes!

*Frequent: Daily to 1-2 times quarterly, infrequent: never before and less than annual.

TABLE 11.19.2. MOTORCYCLE RIDER FAMILIARITY WITH ROADWAY

| Known Use | Exposure Data | | Accident Data | |
|---------------------------|---------------|-------------|---------------|---------|
| | count | Percent | Count | Percent |
| Never Before | 48 | 7.4 | 85 | 10.3 |
| Daily | 312 | 48.1 | 386 | 46.8 |
| 1-4 Times Weekly | 134 | 20.7 | 205 | 24.9 |
| 1-3 Times Monthly | 83 | 12.8 | 73 | 8.9 |
| 1-2 Times Quarterly | 24 | 3.7 | 20 | 2.4 |
| 1-3 Times Annually | 38 | 5.9 | 33 | 4.0 |
| Less than Annually | 9 | 1.4 | 22 | 2.7 |
| TOTAL | 648 | 100.0 | 824 | 100.0 |

TABLE 11.19.3. TIME RIDING BEFORE ACCIDENT/OBSERVATION

| Known Time Riding, Hrs. | Exposure Data | Accident Data |
|-------------------------|-------------------------|-------------------------|
| | Cumulative Frequency, % | Cumulative Frequency, % |
| 0.0 | 3 . 9 | 21.2 |
| 0.1 | 31.6 | 49.4 |
| 0.2 | 49.1 | 67.8 |
| 0.3 | 62.6 | 81.4 |
| 0.4 | 65.9 | 82.8 |
| 0.5 | 77.2 | 88.7 |
| 0.7 | 80.0 | 90.9 |
| 1.0 | 87.5 | 94.5 |
| 2.0 | 93.6 | 97.6 |
| | (584 cases) | (822 cases) |

Table 11.19.4 shows a comparison of trip origin and destination for the accident and exposure data. In these data, the origins of bar-drinking party, shopping-errand, and friends-relatives, are significantly overrepresented in the accident data. Recall that the accident is more likely to **occur** close to the origin. The destinations of shopping-errand, friends-family, and home are significantly overrepresented in the accident data.

Note that work oriented travel is underrepresented in the accident data for both **origin and** destination.

11.20 Motorcycle Rider Protective Equipment

The protective equipment worn by the motorcycle rider was recorded and compared for the accident and exposure data. The most important factor of protection was the safety helmet, and Table 11.20.1 provides a comparison of accident and exposure data for the types of safety helmets worn. The most outstanding factor is the highly significant difference in helmet use; **52.2%**

TABLE 11.19.4. RIDER TRIP PLAN

| Known origin | Exposure Data | | Accident Data | |
|--------------------------|-----------------------|--|-----------------------|--|
| | Adjusted Frequency, % | | Adjusted Frequency, % | |
| Home | 42.8 | | 38.3 | |
| Work | 28.2 | | 19.8 | |
| Shopping | 7.8 | | 10.8 | |
| Recreation | 10.2 | | 9.4 | |
| Friends/Relatives | 7.0 | | 14.6 | |
| Bar/Drinking Party | 0.3 | | 2.2 | |
| School | 3.7 | | 5.0 | |
| | (656 cases) | | (823 cases) | |
| <u>Known Destination</u> | | | | |
| Home | 28.0 | | 32.9 | |
| Work | 24.1 | | 18.4 | |
| Shopping | 10.6 | | 17.1 | |
| Recreation | 22.7 | | 14.7 | |
| Friends/Relatives | 9.1 | | 13.8 | |
| Bar/Drinking Party | 0.2 | | 0.1 | |
| School | 5.3 | | 3.0 | |
| | (660 cases) | | (832 cases) | |

TABLE 11.20.1. MOTORCYCLE RIDER SAFETY HELMET USE

| Known Helmet Coverage Type | Exposure Data | | Accident Data | |
|----------------------------|---------------|---------|---------------|---------|
| | count | Percent | count | Percent |
| Partial | 137 | 6.3 | 32 | 3.6 |
| Full | 517 | 23.8 | 197 | 22.4 |
| Full Facial | 477 | 22.0 | 113 | 12.9 |
| None Worn | 1037 | 47.8 | 536 | 61.0 |
| TOTAL | 2168 | 100.0 | 878 | 100.0 |

of the population-at-risk were wearing some kind of safety helmet but only 39.0% of the accident population were using helmets. There are three possible explanations for this great difference:

(i) Voluntary helmet users are better informed, more mature and cautious, and less likely to be accident-involved.

(ii) Helmet wearers are involved in **some accidents** where accident severity is less and no significant injury occurs because of helmet use.

(iii) Failure to wear a safety helmet is an expression of risk-taking personality.

The chronological fault of the exposure data is **not** responsible for the difference between accident and exposure data for safety helmet use. **Benchmark** data were collected for helmet use in the study area before accident data collection, after accident data collection, and again at the conclusion of exposure data collection. The overall helmet use for the population-at-risk at these times was 50.12, **52.8%**, and 49.7%. which essentially validates this part of the exposure data.

An additional fact is present in these helmet use data: the **accident-**involved motorcycle rider not only shows less helmet use, but uses less helmet coverage. The full facial coverage helmet, which provides much greater protection is significantly underrepresented in the accident data.

The accident data showed a large part of the accident-involved motorcycle riders did not have any kind of eye protection, and had the prospect of limited or impaired vision for exposure of the unprotected eye to wind, dust, insects, etc. Table 11.20.2 compares the eye protection for the accident and exposure data and there is a spectacular underrepresentation of eye protection in the accident data. The accident-involved rider uses significantly less eye protection, and this lack of protection for vision may be one of the most critical elements related to accident causation.

TABLE 11.20.2. MOTORCYCLE RIDER EYE PROTECTION

| Known Eye Protection | Exposure Data | | Accident Data | |
|-------------------------|---------------|---------|---------------|---------|
| | Count | Percent | count | Percent |
| None | 564 | 29.8 | 368 | 46.6 |
| Glasses/Sunglasses Only | 665 | 35.2 | 209 | 26.5 |
| Face Shield | 596 | 31.5 | 185 | 23.4 |
| Goggles | 65 | 3.4 | 28 | 3.5 |
| TOTAL | 1890 | 100.0 | 790 | 100.0 |

Table 11.20.3 provides a detailed comparison of motorcycle rider apparel in use by the accident and exposure populations. The significant differences point out that the accident-involved riders were not well prepared for their accident; they had less substantial garments, gloves, and foot coverage. There is the subtle inference that prudent and mature motorcycle riders understand and appreciate **Shipman's Law of Motorcycle Apparel***. They protect themselves with substantial garments, gloves, footwear, eye protection and helmets, then are less accident-involved in addition to being less injury-involved!

*Carl Shipman: "What you neglect to wear will uniquely determine how you fall, etc."

TABLE 11.20.3. MOTORCYCLE RIDER APPAREL

| Known Use | Exposure Data | | Accident Data | |
|--------------------------------|---------------|--------------|---------------|--------------|
| | Count | Percent | Count | Percent |
| Upper Torso Garment | | | | |
| None | 33 | 1.6 | 14 | 1.6 |
| Light Cloth | 493 | 23.7 | 248 | 28.9 |
| Medium Cloth | 577 | 27.8 | 226 | 26.3 |
| Heavy Cloth | 681 | 32.8 | 303 | 35.3 |
| Leather | 293 | 14.1* | 67 | 7.8 |
| TOTAL | 2077 | 100.0 | 858 | 100.0 |
| Lower Torso Garment | | | | |
| None | 20 | 1.0 | 2 | 0.2 |
| Light Cloth | 62 | 3.1 | 40 | 4.7 |
| Medium Cloth | 1014 | 50.2 | 664 | 77.3 |
| Heavy Cloth | 914 | 45.2* | 149 | 17.3 |
| Leather | 10 | 0.5 | 4 | 0.5 |
| TOTAL | 1920 | 100.0 | 859 | 100.0 |
| Gloves | | | | |
| None | 960 | 50.2 | 522 | 61.5 |
| Light | 121 | 6.3 | 34 | 4.0 |
| Medium | 474 | 24.8* | 128 | 15.1 |
| Heavy | 356 | 18.6 | 165 | 19.4 |
| TOTAL | 1911 | 100.0 | 849 | 100.0 |
| Foot Coverage | | | | |
| None | 9 | 0.5 | 3 | 0.4 |
| Sandal/Athletic Shoe | 306 | 16.0 | 147 | 17.4 |
| Medium Street Shoe | 703 | 36.7 | 340 | 40.2 |
| Heavy Shoe/Boot | 895 | 46.8" | 356 | 42.1 |
| TOTAL | 1913 | 100.0 | 846 | 100.0 |
| *Critical items for comparison | | | | |

Vehicle Factors

11.21 Motorcycle Manufacturer

In the comparison of accident and exposure data, the extraordinary representation of any manufacturer would be difficult to explain on the basis of any factors of vehicle design. Because of the serious faults of chronology in these exposure data, the comparisons of exposure and accident data may create false impressions. Consequently, special limits must be given to the interpretation and use of these comparisons.

Table 11.21.1 shows the adjusted frequencies of participation of the major manufacturers in the accident and exposure data. Note that BMW, Harley-Davidson and Suzuki are significantly **underrepresented** in the accident data; Kawasaki is slightly **underrepresented**; and Honda, Yamaha and Triumph are significantly overrepresented in the accident data. BMW, Harley-Davidson and Triumph represent configurations of motorcycles that are characteristically distinguished from Honda, Kawasaki, Suzuki and Yamaha. There is a popular image presented that riders of BMW, Harley-Davidson and Triumph are all expert, experienced and skilled beyond the ordinary. Also, there is a popular image of the young and inexperienced rider operating the smaller, less expensive Honda, Kawasaki, Suzuki and Yamaha.

TABLE 11.21.1. COMPARISON OF MAJOR MANUFACTURERS IN ACCIDENT AND EXPOSURE DATA

| Manufacturer | 2310 Exposure Data | 900 OSIDs Data | 3600 TARs Data | 54 OSID Fatals |
|--------------------------|-----------------------|-------------------|-------------------|-------------------|
| BMW | 2.8% (60) | 1.6% (14) | 1.3% (45) | 3.7% (2) |
| Harley-Davidson | 11.4% (241) | 10.6% (95) | 9.1% (321) | 14.8% (8) |
| Honda | 47.7% (1011) | 55.7% (501) | 53.0% (1872) | 57.4% (31) |
| Kawasaki | 10.5% (223) | 8.1% (73) | 9.3% (329) | 3.7% (2) |
| Suzuki | 7.3% (154) | 4.4% (40) | 4.4% (155) | 3.7% (2) |
| Triumph | 2.1% (44) | 2.0% (18) | 3.5% (122) | 1.9% (1) |
| Yamaha | 11.5% (243) | 12.2% (110) | 13.7% (482) | 13.0% (7) |
| Total Known Cases | (2119) | (900) | (3531) | (54) |

Because of the obvious contradictions in these **comparisons** of accident and exposure data, useful interpretations are limited and the data shown must be limited in application.

11.22 Motorcycle Size-Engine Displacement

In the comparison of accident and exposure data, the extraordinary representation of any size motorcycle would attract a variety of explanations based upon speed potential and typical rider experience. Because of the serious faults of chronology in these exposure data, the comparisons of exposure data may create false impressions and limits must be given to interpretations.

For example, in the period of **time** between the collection of accident and exposure data, most manufacturers introduced many new models of large and heavyweight motorcycles. In this way, there is the expectation that the exposure data may portray an excess of large and heavyweight motorcycles for comparison with a time appropriate for the accident data. Since vehicle registration data does not accurately represent motorcycle use data, there appears to be no way of satisfactory reconciliation of the chronological fault. Hence, interpretation must respect this limit.

Table 11.22.1 provides a comparison of accident and exposure data for the selected groups of motorcycle sizes. In this comparison, the lightweight (**101-250cc.**) motorcycles are significantly overrepresented in accidents. Also, the large (**501-750cc.**) and heavyweight (**>750cc.**) motorcycles are significantly **underrepresented** in these accidents. There are not sufficient fatal accident data to distinguish a significant participation **in** fatal accidents. However, recall from Section 8.8 that higher injury severity is associated with large motorcycles.

TABLE 11.22.1. COMPARISON OF MOTORCYCLE SIZE IN ACCIDENT AND EXPOSURE DATA

| Engine Displacement. cc. | Exposure Data | 900 OSIDs Data | 3600 TARs Data | 54 OSID Fatals |
|-----------------------------|-----------------------|---------------------|----------------|----------------|
| 0 - 100 (Small) | 6.8% (141) | 9.2% (83) | 8.0% (172) | 3.7% (2) |
| 101 - 250 (Lightweight) | 8.3% (173) | 13.3% (120) | 17.0% (364) | 7.4% (4) |
| 251 - 500 (Medium) | 25.5% (530) | 36.4% (327) | 40.4% (865) | 33.3% (18) |
| 501 - 750 (Large) | 35.9% (746) | 25.4% (228) | 25.0% (534) | 37.0% (20) |
| Over 750 (Heavyweight) | 23.4% (487) | 15.7% (141) | 9.5% (204) | 18.5% (10) |
| SUBTOTAL | (2077) | (899) | (2139) | (54) |
| Unknown or Omitted | 233 | 1 | 1461 | 0 |
| TOTAL | 2310 | 900 | 3600 | 54 |

The popular image that big motorcycles are more accident-involved than small motorcycles is not supported in these data. All of the motorcycles less than **500cc.** are overrepresented in accident involvement and the medium size (**251-500cc.**) are significantly over-involved in these data. The popular proposition which supports these data is that the riders of the large and heavyweight motorcycles are more mature, experienced, skilled, etc. In the **same** sense, riders of the overrepresented medium size motorcycles do not have that same maturity and experience.

11.23 Motorcycle Type

Any comparison of accident **and exposure** data to investigate the effect of motorcycle type has certain expectations of results. If a **motorcycle** configuration **is not** suited to the traffic environment, it would be expected to be more accident involved. Also, motorcycle configurations which closely identify risk-taking tendencies of the rider would be expected to be more frequently involved in accidents.

Table 11.23.1 provides a comparison of exposure data and accident data, and some expectations are confirmed but others are not confirmed. For example, dirt bikes are in an unfavorable environment on the street in traffic but they are in-fact present and are significantly overrepresented in these accidents. It is clear that enforcement is the appropriate countermeasure to limit this exposure of dirt bikes in traffic and resulting accident involvement.

TABLE 11.23.1. COMPARISON OF MOTORCYCLE TYPE IN ACCIDENT AND **EXPOSURE** DATA

| Motorcycle Type | Exposure Data (2310 Cases) | Accident Data (900 OSIDs) | Accident Data (54 Fatal OSIDs) |
|--------------------------------------|-------------------------------|---------------------------------|-----------------------------------|
| Street OEM | 76.4% (1764) | 69.2% (623) | 66.7% (36) |
| Dirt Bike | 0.6% (14) | 1.6% (14) | 3.7% (2) |
| Dual Purpose ("Enduro") | 5.1% (118) | 11.1% (100) | 11.1% (6) |
| Semi-chopper | 3.8% (88) | 7.1% (64) | 7.4% (4) |
| Chopper | 5.0% (115) | 5.4% (49) | 5.6% (3) |
| Cafe Racer | 0.5% (11) | 3.1% (28) | 5.6% (3) |
| Other (Trike, Moped, Minibike) | 4.7% (69) | 2.4% (22) | 0.0% (0) |
| Police | 3.9% (91) | Not identified in these data | 0.0% (0) |
| TOTAL | (2310) | (900) | (54) |

Also, the dual purpose "enduro" motorcycle appears in these accident data **significantly** beyond its representation in the exposure data. Such a dual purpose motorcycle may not have the capability for braking and maneuvering for collision avoidance equivalent to a street motorcycle. Also, the dual purpose motorcycle may be operated by a rider who does not have the same maturity, experience or traffic strategy as the comparable rider of a street bike.

The semi-chopper motorcycle is typified by the following modifications: extended front forks, pull-back handlebars, custom seat, "Harley" rear wheel and tire, sissy bar, etc. These semi-choppers are significantly **overrepresented** in these accident data. The image of the semi-chopper **is** reduced maneuverability and braking for collision avoidance and risk-taking tendencies indicated by the modifications. This image does not apply so conveniently when the exposure and accident data for choppers are compared: the chopper bike *is not* significantly overrepresented in these data. Here, the popular image **may relate** a high level of risk-taking tendency but also a high level of skill and experience.

The cafe racer motorcycle is typified by the following modifications: clip-ons or low set (short) handlebars, rear-set foot controls, partial front **fairing**, custom pipes, racing tires, etc. All of this such racing type equipment is rarely accompanied by genuine racing skills, so the "cafe racer" motorcycle configuration should be closely identified with risk-taking **tendencies**. In this way, the "cafe racer" is essentially equivalent to the "sports car". However, note that the cafe racer is not necessarily a large displacement motorcycle in the same way that a sports car is not necessarily a large displacement automobile.

During the period of accident data collection, mopeds were rarely encountered and no special effort was made to identify them. Later, during the exposure data collection, there were more mopeds in the traffic population and then they were identified for data purposes. Thus, the comparison of accident and exposure data is feckless because of the chronological fault of the exposure data.

Police motorcycles were involved in accidents for which data were collected. However, the police motorcycles were not identified separately except for the exposure data. Recapitulation of the accident cases shows that the regular **law** enforcement motorcycles were underrepresented in the accident data by a factor of approximately three. On the other hand, (private service) funeral escort motorcycles were highly overrepresented in the accident data, and almost always at a high level of injury severity.

During the time between accident data collection and exposure data collection, many new model motorcycles were introduced and several models appeared less frequently in traffic. Many low riders and semi-chopper-like configurations became factory standard models, many more medium displacement models were introduced, genuine choppers appeared less frequently, and many more mopeds entered the traffic system. Hence, caution is due in the interpretation of these data but it appears that cafe racers, dual purpose bikes, dirt bikes, and semi-choppers are excessively involved in these accidents.

11.24 Motorcycle Modifications

Table 11.24.1 shows the motorcycle modifications from the exposure and accident data. Front suspension modifications, such as extended front forks, are essentially identical in accident and exposure data. Rear suspension modifications such as a "Harley" wheel and tire, modified rear shocks, struts, etc.

TABLE 11.24.1. COMPARISON OF MOTORCYCLE MODIFICATIONS FOR ACCIDENT AND EXPOSURE DATA

| Motorcycle Modification | Exposure Data | Accident Data |
|--------------------------------------|---------------|---------------|
| Front Suspension | 10.6% | 10.2% |
| Rear Suspension | 14.1% | 19.1% |
| Crash Bars | 18.1% | 18.1% |
| Sissy Bar | 29.8% | 27.1% |
| Seat | 23.1% | 24.8% |
| Windshield (with or without fairing) | 19.5% | 12.0% |
| Pairing | 12.3% | 8.7% |
| Handlebars | 24.8% | 16.3% |
| Exhaust System | 27.3% | 30.1% |

are significantly overrepresented in the accident data. These types of rear suspension modifications are generally related to the semi-chopper or cafe racer configuration **and** are therefore consistent associations with excess accident involvement.

Crash bars have identical representation in accident and exposure data. Consequently, it is implied that crash bar usage does not increase or decrease accident involvement. Also, recall from the accident injury data that crash bars have no net effect on injuries to protectable regions. If any net beneficial effect results from crash bar use, it will most likely be the reduction of engine side and case cover damage in minor accidents.

Sissy bar usage is essentially the **same** for accident and exposure data. Modified and custom seats also have approximately the same representation in accident and exposure data.

The accident-involved motorcycles utilized significantly fewer windshields and fairings. In addition to the contribution to motorcycle conspicuity, the motorcycle equipped with a windshield and fairing is likely to be a large displacement motorcycle, which is also underrepresented in the accident data. In addition, the popular image is that the motorcycle rider equipping the motorcycle with a fairing may have greater maturity, more experience, and is involved in longer trip plans. A final factor for consideration is that in the time between accident data collection and exposure data collection, there was an increase in the sale and use of frame-mounted fairings. The specific quantification of this change in fairing equipment for the population-at-risk is not known.

The underrepresentation of modified handlebars in the accident population is difficult to explain except by the chronological fault of the exposure data. During the last half **of exposure** data collection, many custom and low rider models were introduced by manufacturers and it is possible that some few of these OEM high-risers and pullbacks were mistaken as modifications during data collection.

The modified exhaust system was typical of many accident-involved motorcycles, and also typical of many motorcycles observed during exposure data collection. The modified exhaust is overrepresented in these data, but not with high significance. To be sure, the number of custom exhaust systems made for motorcycles during recent years has increased. Hence, the exposure data collected some long time after accident data are likely to show more exhaust modifications than the time of the accident occurrence.

Characteristics of the Other Vehicle Driver

11.25 Age and Sex

Exposure data were not collected for the other vehicle driver as was for the motorcycle rider. Basic driver license data were obtained for the times of accident data collection for Los Angeles County. Table 11.25.1 shows the comparison of age groups of the other vehicle drivers involved in the 900 on-scene, in-depth accident investigations, the 3600 traffic accident report cases, and the Class 3 (standard) license data for the Los Angeles County Drivers. The distribution of these data are shown in the Figure 11.25.2. The accident-involved drivers from the 3600 TABS in the age groups of 16-19 20-24 and 25-29 are overrepresented when compared with the age groups of all licensed drivers in Los Angeles County. The accident-involved drivers from the 900 OSIDs confirm the **overrepresentation** for the age groups 20-24 and 25-29, and also note excessive representation for drivers beyond 65 years. This noted excess representation beyond 65 years within the 900 OSID cases is most likely related to those cases being of slightly higher overall severity.

The overrepresentation of the **age groups of 16-29** for the driver of the other vehicle is an expected result because of the excess representation of this age group in all motor vehicle accidents. However, this is an unexpected result since it **would** be anticipated that this younger age group would **be more** familiar with motorcycles. In this **way**, this age group would be expected to **more** readily notice motorcycles and less likely to fail to detect motorcycles in traffic.

The sex of the drivers of the other vehicles are as follows:


| | Male | <u>Female</u> |
|--|-------|---------------|
| 900 OSIDs (617) | 67.0% | 33.0% |
| 3600 TARs (2469) | 65.5% | 34.5% |
| 1977 and 1978 Class 3 L.A. County (8,857,078) | 53.2% | 46.8% |

This comparison shows a significant overrepresentation of the male driver in both sets of accident data. There is no immediate **explanation for this over-**representation except to suspect the lack of suitable exposure data. This suspicion is confirmed in part by recent counts at accident sites. In these counts, the other vehicle drivers were 69.0% male. (702 male, 316 female, 24 unknown, 1072 total.)

TABLE 11.25.1. COMPARISON OF OTHER VEHICLE DRIVERAGE GROUPS AND LOS ANGELES COUNT-f CLASS 3 REGISTRATIONS

| Age Groups | 900 OSIDs | | 3600 TARs | | 1977 and 1978 L.A. County Class 3 Average | |
|-------------------------------------|-----------|-----------|-----------|-----------|---|-----------|
| | Count | Frequency | count | Frequency | Count | Frequency |
| 16-19 | 33 | .0535 | 232* | .0938 | 320981 | .0725 |
| 20-24 | 115 | .1864 | 408 | .1652 | 615375 | .1390 |
| 25-29 | 99 | .1605 | 368 | .1490 | 607573 | .1372 |
| 30-34 | 58 | .0940 | 293 | .1187 | 524310 | .1184 |
| 35-39 | 55 | .0891 | 201 | .0814 | 403204 | .0910 |
| 40-44 | 44 | .0713 | 175 | .0709 | 338760 | .0765 |
| 45-49 | 49 | .0794 | 172 | .0697 | 133167 | .0752 |
| 50-54 | 40 | .0648 | 93 | .0782 | 344927 | .0779 |
| 55-59 | 29 | .0470 | 147 | .0596 | 317052 | .0716 |
| 60-64 | 34 | .0551 | 101 | .0409 | 248232 | .0561 |
| 65-69 | 31 | .0502 | 86 | .0348 | 163944 | .0370 |
| 70-74 | 8 | .0130 | 39 | .0158 | 109205 | .0247 |
| 75-79 | 13 | .0211 | 30 | .0122 | 60389 | .0136 |
| 80-84 | 3 | .0049 | 15 | .0061 | 25542 | .0058 |
| 85-89 | 5 | .0081 | 6 | .0024 | 6455 | .0015 |
| 90-99 | 1 | .0016 | 3 | .0012 | 673 | .0002 |
| TOTAL | 617 | 1.0000 | 2 4 6 9 | 1.0000 | 4428539 | 1.0000 |
| Unknown | 73 | | 10 | | | |
| N.A | 210 | | 1121 | | | |
| *Includes 32 under 16 years of age. | | | | | | |

FIGURE 11.25.2 COMPARISON OF ACCIDENT AND EXPOSURE DATA, AGE OF THE OTHER VEHICLE DRIVER

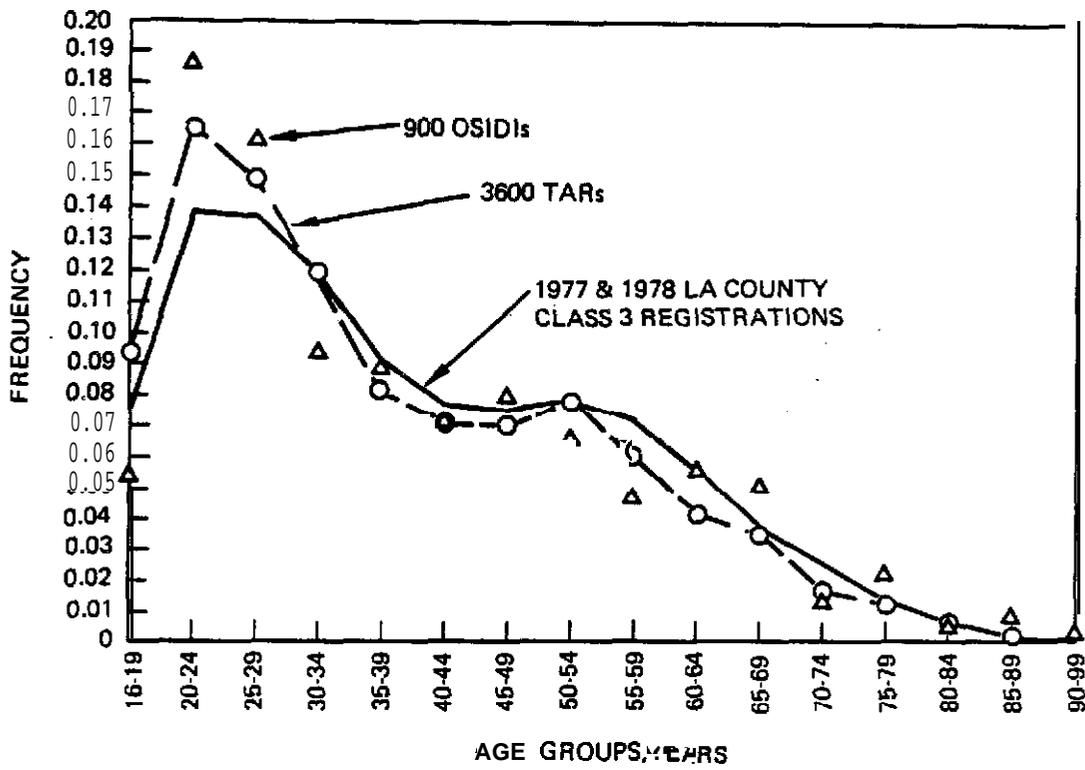

11.26 Other Vehicle Driver License Qualification and Driving Experience

Of the accident-involved drivers of the other vehicles, **6.1%** had neither license nor permit, or were driving with license revoked. Exposure data were not collected for this aspect of driver qualification but comparisons of accident records show equivalent qualifications for all accident involvement. For example, review of samples of all traffic accidents in 1977 showed all accident involved drivers without **current** license were 6.91% (78 NLOP-NLIP, 1128 total).

The experience of the driver of the other vehicle has no outstanding differences from contemporary information.

11.27 Alcohol and Drug Involvement

The known total of alcohol and drug involvement of the other vehicle drivers was as follows:

| | |
|--------------|------|
| OSIDs | 6.4% |
| TARs | 3.7% |

The difference noted here is simply that alcohol and drug involvement noted on traffic accident reports is record of involvement for citation or arrest, and would tend to neglect lesser involvement.

No **exposure** data is available for comparison with the time of the accidents.

11.28 Other Vehicle Type

Table 11.28.1 provides a comparison of exposure and accident data for the type of other vehicle involved in the accident.

TABLE 11.28.1. VEHICLE SIZE AND TYPE

| Type of Vehicle | Exposure Data for O/V Path | Vehicle Size OSIDs | Vehicle Size TARs | Vehicle Type OSIDs |
|-----------------------|----------------------------|--------------------|-------------------|--------------------|
| Passenger Cars | | | | 88.7% |
| Full and Intermediate | 44.1% | 65.0% | 62.0% | |
| compact | 16.5% | 15.6% | 12.6% | |
| Subcompact and Minis | 25.8% | 19.4% | 22.5% | |
| Pickups and Vans | 12.2% | | | 7.7% |
| Trucks and Busses | 1.4% | | | 1.8% |

During the time between collection of accident and exposure data, there "as a distinct increase in vans and pickups in traffic. Because of this chronological fault of the exposure data, vans and pickups are not actually underrepresented in the accident data.

Also, there was an apparent increase in subcompact and **minicars** during this same time so the differences between exposure and accident data are not meaningful.

When the exposure data are compared on a very coarse level, passenger cars have equivalent representation and no particular type of vehicle is outstanding.

12.0 FINDINGS, RECOMMENDATIONS AND PROPOSED COUNTERMEASURES

12.1 Findings

Throughout the accident and exposure data there are special observations which relate to accident and injury causation and characteristics of the motorcycle accidents studied. These findings are summarized as follows:

*Approximately three-fourths of these motorcycle accidents involved collision with another vehicle, which was most usually a passenger automobile.

*Approximately one-fourth of these motorcycle accidents were single vehicle accidents involving the motorcycle colliding with the roadway or some fixed object in the environment.

*Vehicle failure accounted for less than 3% of these motorcycle accidents, and most of those were single vehicle accidents where control was lost due to a puncture flat.

*In the single vehicle accidents, motorcycle rider error was present as the accident precipitating factor in about two-thirds of the cases, with the typical error being a slide-out and fall due to overbraking or running wide on a curve due to excess speed or under-cornering.

*Roadway defects (pavement ridges, potholes, etc.) were the accident cause in 2% of the accidents; animal involvement was 1% of the accidents.

*In the multiple vehicle accidents, the driver of the other vehicle violated the motorcycle right-of-way and caused the accident in two-thirds of those accidents.

*The failure of motorists to detect and recognize motorcycles in traffic is the predominating cause of motorcycle accidents. The driver of the other vehicle involved in collision with the motorcycle did not see the motorcycle before the collision, or did not see the motorcycle until too late to avoid the collision.

*Deliberate hostile action by a motorist against a motorcycle rider is a rare accident cause.

*The most frequent accident configuration is the motorcycle proceeding straight then the automobile makes a left turn in front of the oncoming motorcycle.

*Intersections are the most likely place for the motorcycle accident, with the other vehicle violating the motorcycle right-of-way, and often violating traffic controls.

*Weather is not a factor in 98% of motorcycle accidents.

*Most motorcycle accidents involve a short trip associated with shopping, errands, friends, entertainment or recreation, and the accident is likely to happen in very short time close to the trip origin.

*The view of the motorcycle or the other vehicle involved in the accident is limited by glare or obstructed by other vehicles in almost half of the multiple vehicle accidents.

***Conspicuity** of the **motorcycle** is a critical factor **in** the **multiple** vehicle accidents, and accident involvement is significantly **reduced** by the **use of motorcycle** headlamps-on **in** daylight and the wearing of **high** visibility yellow, orange or bright red jackets.

***Fuel** system leaks and spills "are present **in** 62% of the **motorcycle** accidents in the post-crash phase. This represents an undue hazard for fire.

***The** median pre-crash speed was 29.8 mph, and the median crash speed was 21.5 mph, and the one-in-a-thousand crash speed is **approximately 86 mph**.

***The typical motorcycle** pre-crash lines-of-sight to the traffic hazard portray no contribution of the limits of **peripheral** vision; more than **three-fourths** of **all** accident hazards are within **45°** of either side of straight ahead.

***Conspicuity** of the motorcycle is most critical for the frontal surfaces of the motorcycle and rider.

*Vehicle defects related to accident causation are rare and likely to be due to deficient or defective maintenance.

***Motorcycle** riders between the ages of 16 and 24 are significantly **over-**represented in accidents; motorcycle riders between the ages of 30 and 50 are significantly underrepresented.

*Although the majority of the accident-involved motorcycle riders are male (96%), the female motorcycle riders are significantly overrepresented in the accident data.

*Craftsmen, laborers and students comprise most of the accident-involved motorcycle riders but the professionals, sales workers and craftsmen are underrepresented and the laborers, students and unemployed are overrepresented in the accidents.

*Motorcycle riders with previous recent traffic citations and accidents are overrepresented **in** the accident data.

*The motorcycle riders involved in accidents are essentially without training; 92% were self-taught or learned from family or friends. Motorcycle rider training experience reduces accident involvement and is related to reduced injuries in the avant of accidents.

***More than** half of the accident-involved motorcycle riders had less than 5 months **experience** on the accident motorcycle, although the total street riding experience was almost 3 years. Motorcycle riders with dirt bike **experience** are significantly underrepresented in the accident data.

***Lack** Of attention to the driving task is a common factor **for** the motorcyclist in an accident.

*Almost half of the fatal accidents show alcohol involvement.

*Motorcycle riders in these accidents showed significant collision avoidance problems. Most riders would overbrake and skid the rear **wheel**, and **underbrake** the front wheel greatly reducing collision avoidance deceleration. The **ability** to **countersteer** and swerve was essentially absent.

***The typical** motorcycle accident allows the motorcyclist just less than 2 seconds to complete all collision avoidance action.

***Passenger** carrying motorcycles are not overrepresented in the accident data.

***The** drivers of the other vehicle involved in collision with the motorcycle are not distinguished from other accident populations except that the ages of 20 to 29, and beyond 65 are overrepresented. Also, these drivers are generally unfamiliar with motorcycles.

*The large displacement motorcycles are underrepresented in accidents but they are associated with higher injury severity when involved in accidents.

*Any effect of motorcycle color on accident involvement is not determinable from these data, but is expected to be insignificant because the frontal surfaces are most often presented to the other vehicle involved in the **collision**.

*Motorcycles equipped with fairings and windshields are underrepresented in accidents, most likely because of the contribution to conspicuity and the association with more experienced and trained **riders**.

*Motorcycle riders in these accidents were significantly without motorcycle license, without any license, or with license revoked.

*Motorcycle modifications **such** as those associated with the Semi-Chopper or Cafe Racer are definitely overrepresented in accidents.

***The** likelihood of injury is extremely high in these motorcycle accidents; 98% of the multiple vehicle collisions and 96% of the single vehicle accidents resulted in some kind of injury to the motorcycle rider; 45% resulted in more than a minor injury.

*Half of the injuries to the somatic regions were to the ankle-foot, lower leg, knee, and thigh-upper leg.

***Crash** bars are not an effective injury countermeasure; the reduction of injury to the ankle-foot is balanced by increase of injury to the thigh-upper leg, knee, **and** lower leg.

*The use of heavy boots, jacket, gloves, etc., is effective in preventing or reducing abrasions and lacerations, which are frequent but rarely severe injuries.

*Groin injuries were sustained **by** the motorcyclist in at least 13% of the accidents, and typified by multiple vehicle collision in frontal impact at higher than average speed,

*Injury severity increases with speed, alcohol involvement and motorcycle size.

*Seventy-three percent of the accident-involved motorcycle riders used no eye protection, and it is likely that the wind on the unprotected eyes contributed an impairment of vision which delayed hazard detection.

*Approximately 50% of the motorcycle riders in traffic were using safety helmets but only 40% of the accident-involved motorcycle riders were wearing helmets at the time of the accident.

*Voluntary safety helmet use by those accident-involved motorcycle riders was lowest for untrained, uneducated. young motorcycle riders on hot days and short trips.

***The most** deadly Injuries to the accident victims were injuries to the chest and head.

*The use of the safety helmet is the single critical factor in the prevention **or** reduction of head injury; the safety helmet which complies with FMVSS 218 is a significantly effective injury countermeasure.

*Safety helmet use caused no attenuation of critical traffic sounds, no limitation of pre-crash visual field, and no fatigue or loss of attention; no element of accident causation was related to helmet use,

***FMVSS** 218 provides a high level of protection in traffic accidents, and needs modification only to increase coverage at the back of the head and demonstrate impact protection of the front of full facial coverage helmets, and insure all adult sizes for traffic use are covered by the standard.

*Helmeted riders and passengers showed significantly lower head and neck injury for all types of injury, at all levels of injury severity.

***The** increased coverage of the full facial coverage helmet increases protection, and significantly reduces face injuries.

***There** is no liability for neck injury by wearing a safety helmet; helmeted riders had less neck injuries than **unhelmeted** riders. Only four minor injuries were attributable to helmet use, and in each case the helmet prevented possible critical or fatal head injury,

*Sixty percent of the motorcyclists were not wearing safety helmets at the time of the accident. Of this group, 26% said they did not wear helmets because they were **uncomfortable** and inconvenient, and 53% simply had no expectation of accident involvement.

*Valid motorcycle exposure data can be obtained only from collection at the traffic site, Motor vehicle or driver license data presents information which is completely unrelated to actual use,

***Less** than 10% of the motorcycle riders involved in these accidents had insurance of any kind to provide medical care or replace property.

12.2 Recommendations and Proposed Countermeasures

Training

Specialized motorcycle rider training courses were not readily available during the times of accident or exposure data collection. Consequently there were not many riders who had the advantage of such specialized motorcycle rider training, and the majority of the riders interviewed were untrained and had learned whatever they knew about motorcycles from their own experience or from family and friends. This lack of training was a significant factor in accident involvement and it is clear that motorcycle riders benefit greatly from such specialized training and could develop important skills, strategies and attitudes to limit accident involvement and reduce **injury** severity.

The Motorcycle Rider Course of the Motorcycle Safety Foundation should be the prerequisite (**or** at least corequisite) of licensing and use of a motorcycle in traffic. This course is well developed and has proven effective by

containing the basic ingredients for safe operation of motorcycles in traffic. An additional focus of the **MSF** Motorcycle Rider Course should be to incorporate the critical areas of knowledge on safe traffic strategy and collision avoidance skills which were shown to be especially **critical** by this research.

If the training is not associated with some aspect of licensing or traffic enforcement, other avenues of safety education will face great difficulty because the target group of laborers, students and unemployed will be an abstract and mobile body with limited prospects of effective communication,

Research is needed to develop effective training methods for collision avoidance braking skills on contemporary motorcycles, and also to investigate the benefits of interconnected brake systems, e.g. **Moto Guzzi T-3**, and **anti-lock** or antiskid brake systems, e.g. **TRRL Lucas-Girling Norton 850**.

Licensing

The accident-involved motorcycle riders are shown to be significantly without license, or any special motorcycle license endorsement. This is a reliable indication that these riders do not have the the necessary skills and traffic strategies to operate safely in traffic, especially when so many of those accidents will be caused by another driver. All motorcycle riders in traffic should have the basic license **plus** a special endorsement or supplementary license for **motorcycle** operation.

The special license for motorcycle operation should require **special** examinations of substance and authority, so that emphasis and **attention to** safe operation of the motorcycle is given a true priority. Some brief "**Simon says**" type of written examination and casual riding examination by an unqualified remote observer serve no effective purpose and demean the object of licensing. The written and traffic rider examinations should be realistic and authoritative.

The demonstration programs conducted by **NHTSA** Traffic Safety Programs in San Diego and Sacramento, California, have shown an appropriate and effective level of attention to this problem and should be instituted as a basic **requirement** as soon as possible. A detailed examination with authority and substance is necessary to provide the proper emphasis and attention to the critical accident involvement of the unlicensed **motorcycle** riders,

Law Enforcement

Law **enforcement** has a special contribution to make in the prevention of motorcycle accidents. Some of these contributions are simple and some are very difficult: dirt bikes in traffic are an obvious hazard; motorcycle riders without license are not easy to detect or stop without cause, and alcohol-involved motorcycle riders are far more difficult to detect than alcohol-involved automobile drivers. The excess involvement of the unlicensed rider in all accidents, and the alcohol-involved rider in fatal accidents, demands enforcement action, but legal requirements of due cause for a traffic stop may **limit** this action. The data of this research should provide the basis of "due cause" for preliminary enforcement action and screening of traffic for unlicensed riders.

One f **undamental** communication system is available through the **motorcycle** rider under citation for traffic violation. The data of this research show that driver improvement is vital to those motorcycle riders **who** have had traffic violations or accidents, and experience has shown that a special motorcycle "traffic school" is an effective alternative to the payment of fine for citation. Advantage should be made of this contact opportunity to require a special motorcycle traffic school for motorcycle riders with traffic citations so that critical information can be given to these likely accident candidates.

One impression developed during this research, and encountered in many motorcycle accident investigations throughout the various states, was the lack of punitive action for the culpable driver of the other vehicle involved in the accident with the motorcycle. The outward appearance is that the offending driver is rarely faced with effective prosecution of right-of-way violation, negligent or reckless driving causing injury, or even vehicular manslaughter. Often there is the incorrect impression of excess speed or recklessness of the motorcycle rider. In most cases there is not an adequate collection of evidence and accurate reconstruction of the accident because of the police traffic accident investigator's unfamiliarity with motorcycle accident analysis. Many times there **is** simply the impression that "this was just another motorcycle accident." This lack of effective punitive action needs research for a **more** precise definition of the problem and evaluation for accident countermeasures.

Protective Equipment

This research shows that there is a critical *need* for the "se of protective equipment by every motorcycle rider. The contemporary motorcycle safety helmet provides a spectacular reduction of heed **AND** neck injury, without any adverse effect on vision or hearing, or **vulnerability** for other injury. This research shows NO reason for any motorcyclist to be without a safety helmet.

Eye protection is vital to preserve vision es well as protect the eyes and face. The failure to wear eye protection appears as an unreasonably frequent factor for the accident-involved rider, and the "se of contemporary eye protection involves only benefit and no hazard. Of course, the safety helmet is the most convenient foundation for eye protection such as a face shield.

The traditional heavy jacket, gloves, pants and boots are clearly effective in reducing the **most common** abrasions, i.e. "road rash." An important improvement would be to insure that the upper torso garment be an effective contribution to **conspcuity**.

Conspicuity

The driver of the other vehicle involved in collision with the motorcycle DID NOT SEE the motorcycle, or did not see the motorcycle until it was too late to avoid the collision, In **some** instances, it was clear that there was some view obstruction or limitation of vision for the other vehicle of the motorcycle (usually stationary or mobile vehicles), and this points out the

need for the motorcycle rider to develop a traffic strategy so that he can SEE AND BE SEEN in traffic. This should be the most important component of any motorcycle rider training program.

However, the **most frequent** case was truly that of the other vehicle driver failing to detect the motorcycle in traffic. In such cases it was clear that the increased conspicuity would reduce accident involvement. The data from this research are conclusive in the favorable factors to increase conspicuity: headlamp on in daytime is highly effective, bright upper torso garments are very helpful, while war surplus army jackets are deadly, and fairings and windshields apparently make the small silhouette of the motorcycle larger and more conspicuous.

The conspicuity problem is a complex one and in greatest part it is a problem of the frontal surfaces of the motorcycle. The simple countermeasures listed above are surely effective, but more fundamental scientific research may uncover additional effective treatments based upon human factors, e.g. the "Q-switch" based on the **Bartley** effect, Vetter "Leading Edge Lights" to increase contrast conspicuity in the frontal regions, **etc.**

Federal Motor Vehicle Safety Standards

Federal Motor Vehicle Safety Standard 218 governing motorcycle safety helmets provides a high level of protection for the typical traffic accident, and appears to need only minor modifications. The coverage for impact attenuation should be extended to include the lower back of the head, and full facial coverage helmets should demonstrate some sort of impact attenuation by the chin piece. Helmet conditioning prior to test could be more realistic, and retention system test should include some component of side force.

The data of this accident research do not indicate the need for more severe requirements of impact, penetration and retention performance. In fact, it is recommended that the present minimum performance standards be maintained because more severe standards would have an undesirable and adverse effect on the minimum cost of a qualified helmet,

All adult sizes of safety helmets should be covered by this standard so that all motorcycle riders will have the assurance of a qualified helmet for protection. The application of the standard in past time to "medium size" only has created considerable questions among consumers and decreased the public confidence in the standard.

Federal Motor Vehicle Safety Standard 119 governing new pneumatic tires appears to provide adequate guarantees of safe equipment. The few accidents due to puncture flats were not defect related and there were no standard-related problems of tires and wheels. The future increasing applications of tubeless tires which resist sudden deflation punctures will reduce this small area of accident causation.

Federal Motor Vehicle Safety Standard 122 establishes equipment and performance requirements for motorcycle brake systems. There were no standard-related problems discovered in these accident investigations; the very few brake mechanical problems were entirely related to defective or deficient

maintenance. On the other hand, these accident cases showed significant rider problems of affective braking for collision avoidance. Research is needed to investigate the potential improvement in collision avoidance performance by the use of interconnected and **antilock** or antiskid brake systems, Effective collision avoidance braking was a significant deficiency in these accident data with the typical accident-involved motorcycle rider skidding the rear tire but not using the front brake. It is possible that specialized rider training can not be **an** adequate countermeasure to improve collision avoidance braking, and the first objective should be to investigate the benefits of a well-designed interconnected front and rear brake system.

Federal Motor Vehicle Safety Standard 123 specifies the requirements for motorcycle controls and displays, stands, and footrests, The majority of the motorcycles examined in this research conformed to the standard, **even** though manufactured before the effective date of the standard. In a few instances, the validity of the standard was confirmed, e.g. a non-conforming, **pre-**standard motorcycle gave supporting evidence, with the rider precrash action of front hand brake use but d-hifting with the right foot rather than left foot rear braking. The limited cases of a sidestand not retracted and grounding out involved pre-standard or modified motorcycles, and standard compliance would have prevented the associated loss of control.

There is a significant post-crash fire hazard at most motorcycle accidents, due to fuel spills and leaks. In greatest part, this is due to the post-crash posture of the motorcycle lying down on its side, far from the normal containment orientation of the fuel system. While it is expected that some fuel loss may occur in such post-crash posture, future improvements should focus on reducing this hazard. The tank cap must not protrude to cause groin injury or allow opening by the events of the typical crash impact, the carburetors should not continue to receive fuel from the tank to spill or leak, and the tank structure and fuel lines should demonstrate some minimum resistance to violation or damage in typical crash impacts. In contemporary time the fuel system configuration of the Honda Gold Wing demonstrates most of these features desirable for crashworthiness.

The accident research showed no contributions to accident causation from cable controls, wheels and rims, lack of side reflectors, or rear view **mirrors.**

13.0 REFERENCES

The following references were those used primarily by the **research team**. of **course**, additional publications may be related to the subjects of the research, and used by individual **team** members as reference.

American Association for Automotive Medicine, Committee on Injury Scaling, The Abbreviated Injury Scale, 1976 Revision, American Association for Automotive Medicine, Morton Grove, Illinois, 1976.

Bothwell, P. W., Motorcycle Crash Tests, in Quest for Safety, (Ball, A., Ed.), the Jim Clark Foundation, London, 1975.

Bothwell, P. W., Knight, R. E., Peterson, H. C., Dynamics of Motorcycle Impact 1971-1973, Summary Report - Results of Crash Test Program and Computer Simulation, Final Report No. DRI-2621, 1973, (NTIS No. PB 226592).

Buchanan, L. S., Bischoff, D. C., Richardson, H. A., A Preliminary Analysis of Safety Helmet Effectiveness, Proceedings of the Second International Congress on Automotive Safety, 1973, SAE Paper No. 73013.

California Department of Motor Vehicles, Budget Section, Forecasting Unit, Estimated Fee Paid - Registration by County, California Department of Motor Vehicles, Sacramento, 1976, 1977, 1978, 1979.

California Department of Motor Vehicles, Electronic Data Processing unit, Driver License Information Report, California Department of Motor Vehicles, Sacramento, 1977, 1978, 1979.

Fell, J. C., A Motor Vehicle Accident Causal System: The Human Element, NHTSA TR DOT-HS-801-214, July, 1974.

Hurt, H. H., Jr., Accident Investigation Methodology Peculiar to Motorcycles and Minibikes, Proceedings of the Second International Congress on Automotive Safety, 1973, SAE Paper No. 73051.

Hurt, H. H., Jr., Motorcycle Handling and Collision Avoidance: Anatomy of a Turn, Proceedings of the Second International Congress on Automotive Safety, 1973, SAE Paper No. 73032.

Hurt, H. H., Jr., & Dupont, C. J., Human Factors in Motorcycle Accidents, 1977, SAE Paper No, 770103.

Hurt, H. H., Jr., Ouellet, J. V., & Wagar, I. J., Analysis of Accident-Involved Motorcycle Helmets, Proceedings of the Twentieth Conference of the American Association for Automotive Medicine, 1976.

Janoff, M. S., Motorcycle Noticeability and Safety During the Daytime, Proceedings of the Second International Congress on Automotive Safety, 1973, SAE Paper No. 73034,

Johnson, D. H., & Newman, J. A., Injury Mechanisms in Motorcycle Accidents, Scientific Conference on Traffic Safety, National Department of Health and Welfare, Ministry of Transport, Canada, 1974.

Marsh, J. M., An Occupant Injury Classification Procedure Incorporating the Abbreviated Injury Scale, Proceedings of the International Accident Investigation Workshop, 1973.

Newman, J. A. & Webster, G. D., The Mechanics of Motorcycle Accidents, Proceedings of the Eighteenth Conference of the American Association for Automotive Medicine, 1974.

Ouellet, J. V., Helmets, in Automobile Accident Reconstruction, (Barzelay, M., Ed.), Mathew Bender Publishing Co., N.Y., 1979.

Ouellet, J. V., **Motorcycles**, in Automobile Accident Reconstruction, (Barzelay, M., Ed.), Mathew Bender Publishing Co., N.Y., 1979.

Reiss, M. L., Berger, W. G. & Valette, G. R., Analysis of Motorcycle Accident Reports and Statistics, Biotechnology Inc., 1974.

Severy, D. M., Brink, H. M. & Blaisdell, D. M., Motorcycle Collision Experiments, Proceedings of the Fourteenth Stapp Car Crash Conference, 1970, SAE Paper No. 700897.

Weir, D. H., Motorcycle Handling Dynamics and Rider Control and the Effect of Design Configuration on Response and Performance, Ph.D. Dissertation, University of California at Los Angeles, 1972,

Weir, D. H., A Manual Control View of Motorcycle Handling. Proceedings of the Second International Conference on Automotive Safety, 1973, SAE Paper No. 73018.

Also, publications which were reports of progress on this research are as follows:

Hurt, H. H., Jr., Phase I Report - Motorcycle Accident Cause Factors and Identification of Countermeasures, U. S. Department of Transportation, 1976,

Hurt, H. H., Jr., Status Report of Accident Investigation Data, Motorcycle Accident Cause Factors and Identification of Countermeasures, DOT-W-804-096, PB245682, 1979.